


Switches & Control Gear

Miniature, Sub-Miniature Panel Mounting

Detailed product specifications are available on: us.100y.com.tw




Model No.	Circuit
6506A	2P SPST OFF-(ON)
6506B	2P SPST ON-(OFF)
Rating	3A 125V AC
Contact resistance	50mΩ Max.
Insulation resistance	DC 500V 100MΩ Min.
Dielectric strength	AC 100V 1 minute

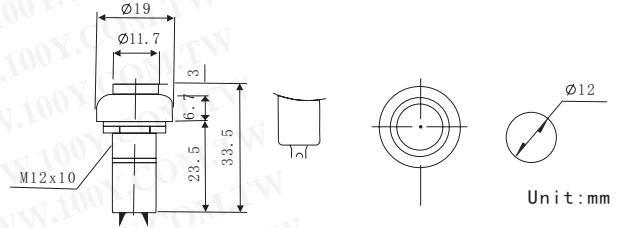


Part No.	Product No.	Description	Button/Body Color	Contact Rating	Pins/Terminal Type	Contact Function
11989	6506A	Momentary Push Button Switches	Red	3A/250Vac	2	A,OFF-(ON)
8555	6506B	Button Switches	Red	3A/250Vac	2	ON-OFF



- 6P DPDT ON-ON
- AC 125V 4A
- Terminal : Solder PIN
PC PIN
- (M) : (Momentary)

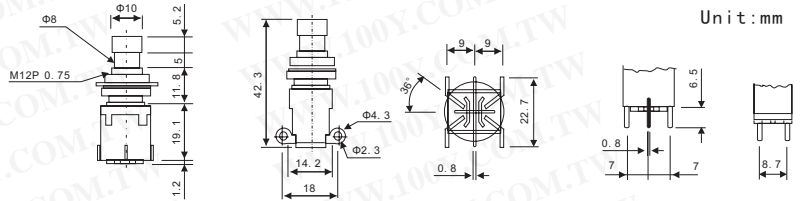


Part No.	Product No.	Description	Contact Rating	Pins/Terminal Type	Contact Function
4287	6520C	Momentary Push Button Switch	AC125V/3A	6	ON-ON
49332	6520C	Momentary Push Button Switch	AC125V/3A	6	ON-ON

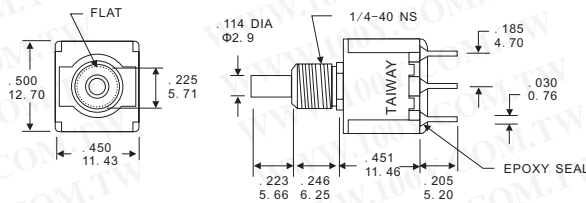

SPECIFICATIONS:

- Contact rating: 1 AMP@120VAC or 28VDC
0.4Volt-Amps (VA), 20 VAC or VDC max.
- Electrical life: 50,000 make and break cycles at full load
- Contact resistance: 1,000MΩ min
- Dielectric strength: 1,000V RMS @ sea level
- Operation temperature: -30°C to 85°C

Part No.	Product No.	Description	Button/Body Color	Contact Rating	Pins/Terminal Type	Contact Function
11651	7ND7P1B1M1QE	Snap-Acting Pushbutton Switches	Red	1A 120V AC Or 38V DC	6	1-3,4-6 ON,1-2,4-5 MOM

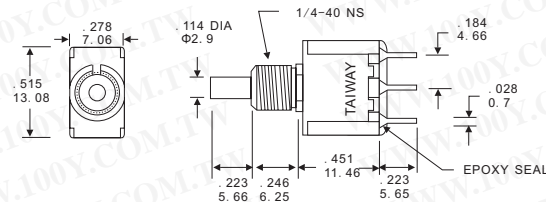

SPECIFICATIONS:


- Contact rating: 1AMP@ 120VAC or 28VDC
40 Volt-Amps(VA),20VAC or VDC max.
- Electrical life: 50,000 make and break cycles at full load
- Contact resistance: 1,000MΩ min.
- Dielectric strength: 1,000V RMS @ sea level.
- Operation temperature: -30°C TO 85°C

Part No.	Product No.	Description	Button/Body Color	Contact Rating	Pins/Terminal Type	Contact Function
3449	7NS7P1B1M1QE	Red Push Button Switches	Red	1A 120V AC Or 38V DC	3 Pin	1-3ON,1-2MOM



SPECIFICATIONS:

- Contact rating: 1AMP @ 120VAC or 28VDC
- Electrical life: 50,000 make and break cycles at full load
- Contact resistance: 20MΩ max. initial @2-4 V(D.C)
100MA for both coin silver and gold plated contact
- Insulated resistance: 1000MΩ min.
- Dielectric strength: 1,000V RMS @ sea level.
- Operation temperature: -30°C TO 85°C

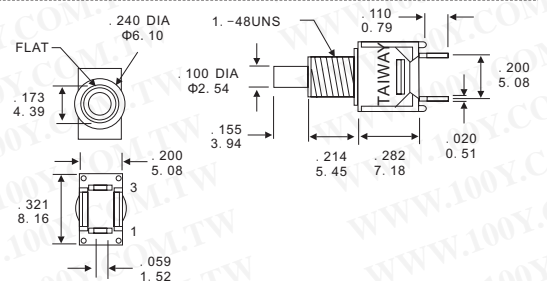

Part No.	Product No.	Description	Button/Body Color	Contact Rating	Pins/Terminal Type	Contact Function
4533	8MS9B500M1QE	Momentary Push Button Switches	Red	1A/125Vac	2	OFF-(ON)

- We provide a wide range of products to development and maintenance engineers in all type of business
- If you cannot find the components you want on the catalogue, please call us.

Taiwan: 886-3-5753170
Shanghai: 021-54151736 Shenzhen: 0755-83298787

Centenary Materials
Waiting for your phone call



T E L : Taiwan: 886-3-5753170
F A X : Taiwan: 886-3-5753172
E-mail : Taiwan: us_sale@100y.com.tw

Shenzhen: 86-755-83298787
Shenzhen: 86-755-83640655
Shenzhen: 100y@163.com

Shanghai: 86-21-54151736
Shanghai: 86-21-64605107
Shanghai: 100y-1@163.com