


Switches & Control Gear

Miniature, Sub-Miniature Panel Mounting

Detailed product specifications are available on: us.100y.com.tw

Specifications :


- Switch system : each contact block has one double break snap action switching mechanism.
- Switch mode : momentary or alternate action, 1-4 poles.
- Contact material : soldering type - silver is standard; socket type - pin with golden plating.
- Body material : high-grade temperature thermoplastic. Contact housing moulded in electrical high-grade thermosetting plastic.
- Operating travel : 3.0 mm.
- Actuating force : 2-5N depending on no. of contact block.
- Mechanical lifetime : > 2 million operations.
- Electric rating : 250V AC 5A, 125V AC 8A, 250V DC 0.2A, 24V DC 6A

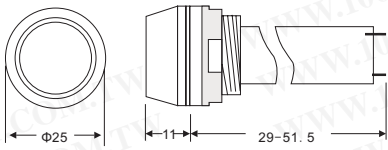


Part No.	Product No.	Manufacturer	Description	Button/Body Color	Contact Rating	Pins/Terminal Type	Contact Function
49647	D16LMV2-1CG	DECA	Non-Illuminated pushButton 1 pole momentary action(Waterproof)	Green/metal ring-optional	250V AC 5A/125V AC 8A/250V DC 0.2A/24V DC 6A	1 pole/momentary action	
49632	D16LMV2-1CR	DECA	Non-Illuminated pushButton 1 pole momentary action(Waterproof)	SPST-1 pole	Red/metal ring-optional		25mm*L:39mm
49659	D16LMV2-1CY	DECA	Non-Illuminated pushButton 1 pole momentary action(Waterproof)	Yellow/metal ring-optional	250V AC 5A/125V AC 8A/250V DC 0.2A/24V DC 6A	1 pole/momentary action	



Color: ●●

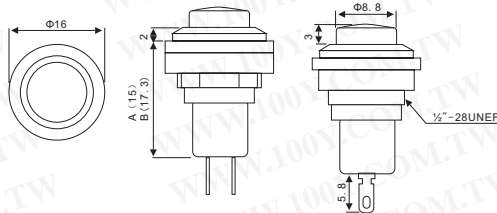

A




Rating	3A 125V AC 1.5A 250V AC
Contact resistance	50mΩ Max
Insulated resistance	DC 500V 100MΩ Min
Dielectric strength	AC 1000V 1 minute
Cut-out	

Part No.	Product No.	Description	Button/Body Color	Contact Rating	Pins/Terminal Type	Contact Function
14146	R13-502A-05	Momentary Push Button Switches	Red/Blak	3A125VAC/1.5A250VAC	2 Pin/Solder	OFF-(ON)



Color: ●

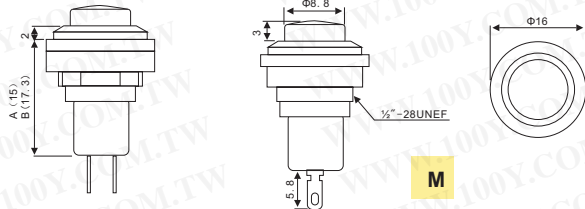

M


Rating	3A 125V AC 1.5A 250V AC
Contact resistance	50mΩ Max
Insulated resistance	DC 500V 100MΩ Min
Dielectric strength	AC 1000V 1 minute

Cut-out	
---------	--


Part No.	Product No.	Description	Button/Body Color	Contact Rating	Pins/Terminal Type	Contact Function
33216	R13-502MA-05	Push Button Switches		3A/125V 1.5A/250V	3P/SO Solder	OFF-(ON) SPDT



Color: ●

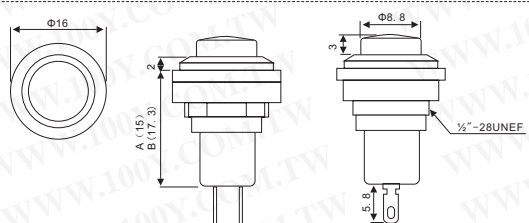

C



Rating	3A 125V AC 1.5A 250V AC
Contact resistance	50mΩ Max
Insulated resistance	DC 500V 100MΩ Min
Dielectric strength	AC 1000V 1 minute
Cut-out	

Part No.	Product No.	Description	Button/Body Color	Contact Rating	Pins/Terminal Type	Contact Function
14281	R13-502MC-05	Push Button Switches	Red	3A/125V 5A/250V	3P/SO Solder	ON-(ON) SPDT

- We provide a wide range of products to development and maintenance engineers in all type of business
- If you cannot find the components you want on the catalogue, please call us.

Taiwan: 886-3-5753170
Shanghai: 021-54151736 Shenzhen: 0755-83298787

Centenary Materials
Waiting for your phone call



T E L : Taiwan: 886-3-5753170
F A X : Taiwan: 886-3-5753172
E-mail: Taiwan: us_sale@100y.com.tw

Shenzhen: 86-755-83298787
Shenzhen: 86-755-83640655
Shenzhen: 100y@163.com

Shanghai: 86-21-54151736
Shanghai: 86-21-64605107
Shanghai: 100y-1@163.com