

Switches & Control Gear

Miniature, Sub-Miniature Panel Mounting



Detailed product specifications are available on: us.100y.com.tw



FEATURES:

- Proof voltage: 1,500 V AC
- Contact resistance: 20 MΩ max.
- Electrical life: 50,000 min.
- Mechanical life: 100,000 min.
- Circuitry : S. P. S, T
- Contact rating: 3A 250VAC
- Insulated resistance: 100MΩ
- Type: OFF-ON

Colors: ● ●

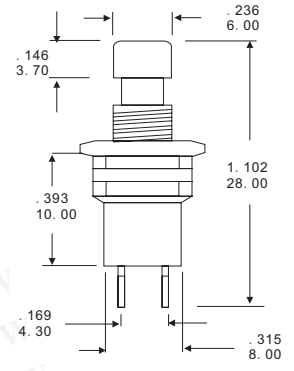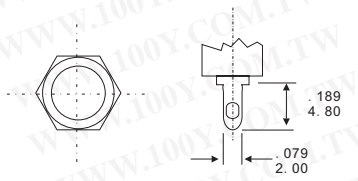



Part No.	Product No.	Description	Button/Body Color	Contact Rating	Pins/Terminal Type	Contact Function
2209	YR18-29A-302	Momentary Push Button Switches	Red	1A 250V AC	2Pin	OFF-ON
7906	YR18-29A-5	Momentary Push Button Switches	Yellow	1A/250Vac	2P	OFF-ON



FEATURES:

- Proof voltage: 1,500 V AC
- Contact resistance: 20 MΩ max.
- Electrical life: 50,000 min.
- Mechanical life: 100,000 min.
- Circuitry : S. P. S, T
- Contact rating: 3A 250VAC
- Insulated resistance: 100MΩ
- Type: OFF-ON

Colors: ●

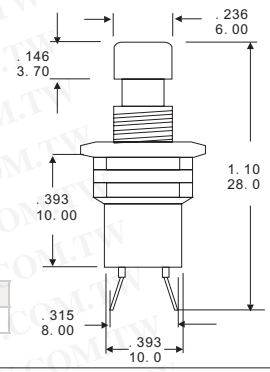

Part No.	Product No.	Description	Button/Body Color	Contact Rating	Pins/Terminal Type	Contact Function
3383	YR18-30B-3	Momentary Push Button Switches	Red	1A 250V AC	2Pin	ON-OFF

Standard Illuminated With Snap-action Switch Element

Detailed product specifications are available on: us.100y.com.tw




MATERIALS

Switch Housing:	Polyetherimide (PEI)
Contact housing:	Diallyl phthalate (DAP)
Lens:	Polycarbonate (PC)
Contacts:	Silver plated copper alloy
Terminals:	Silver plated copper alloy

SPECIFICATIONS

Rating:	5A@250 VAC-UL, VDE, Nemko, Semko, Demko, Fimko, CSA 8A@125 VAC - UL, CSA 2A@250 VAC - UL, CSA 6A@24 VDC - UL, CSA
Mechanical life:	≥100,000 cycles
Electrical life:	≥50,000 cycles
Contact resistance:	100mΩmax. typical; initial @ 2-4 VDC
Insulation resistance:	>1,000mΩ
Dielectric strength:	>1,500 volts 1 minute >3,000 volts between poles
Actuation force:	300g/pole
Operating temp:	-20°C to 55°C

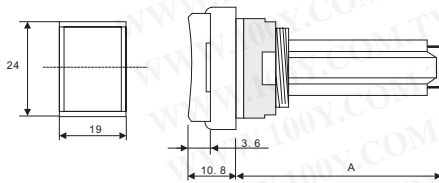

Part No.	Product No.	Manufacturer	Description	Installed Aperture	Contact Function	Contact Rating	Button/Body Color
47323	01-121.0252+2	EAO	Indicator, Lighted Pushbuttons with Snap Acting Switch Element	18*24	1Pole	250VAC/5A	Red/black
47324	01-121.0252+5	EAO	Indicator, Lighted Pushbuttons with Snap Acting Switch Element	18*24	1Pole	250VAC/5A	Green/black



MATERIALS

Switch Housing:	Polyetherimide (PEI)
Contact housing:	Diallyl phthalate (DAP)
Lens:	Polycarbonate (PC)
Contacts:	Silver plated copper alloy
Terminals:	Silver plated copper alloy

SPECIFICATIONS

Rating:	5A@250 VAC-UL, VDE, Nemko, Semko, Demko, Fimko, CSA 8A@125 VAC - UL, CSA 2A@250 VAC - UL, CSA 6A@24 VDC - UL, CSA
Mechanical life:	≥100,000 cycles
Electrical life:	≥50,000 cycles
Contact resistance:	100mΩmax. typical; initial @ 2-4 VDC
Insulation resistance:	>1,000mΩ
Dielectric strength:	>1,500 volts 1 minute >3,000 volts between poles
Actuation force:	300g/pole
Operating temp:	-20°C to 55°C

Part No.	Product No.	Manufacturer	Description	Installed Aperture	Contact Function	Contact Rating	Button/Body Color
19810	01-121.0252+7	EAO	Indicator, Lighted Pushbuttons with Snap Acting Switch Element	18*24	1Pole	250VAC/5A	White/black



T E L : Taiwan : 886-3-5753170
F A X : Taiwan : 886-3-5753172
E-mail : Taiwan : us_sale@100y.com.tw

Shenzhen : 86-755-83298787
Shenzhen : 86-755-83640655
Shenzhen : 100y@163.com

Shanghai : 86-21-54151736
Shanghai : 86-21-64605107
Shanghai : 100y-1@163.com