

Switches & Control Gear

Standard Illuminated With Snap-action Switch Element


Detailed product specifications are available on: us.100y.com.tw

SPECIFICATIONS

CHARACTERISTIC:

- Installed hole 16m/m, Available in three sizes appearance:
Square 18*18mm
Circle 18m/m
- Rectangular 18*24 mm
- Offer built-in standard type, to avoid infiltration of liquids before the panel.
- Heightening borders to prevent unnecessary mistakenly touch actuator.
- The use of micro-structure T13 / 4 Baizhi lights, and LED lights Helium Neon Glow Indicator Lamp.
- A fast switching agencies, contact can automatically remove carbon deposition.
- Each switch modules with a set of normally closed and a group of normally open contact.
- Use plastic fire rating UL94V0, Plastic body could extinct by itself

- Contact material: Silver plated platinum
- Contact capacity: 250 VAC/5A (p. f.=0.9)
- Electrical conductivity cell life: 5A/250 VAC 50, 000
4A/250 VAC 60, 000
2A/250 VAC 200, 000
1A/250 VAC 400, 000
- Max insulated voltage: In all terminals and some plastic shell, 4000VAC, 50HZ, 1 minute
- Insulated resistance: <500 VDC, >10⁴MΩ
- Resistance welding temperature: 200°C/5sec
- Shell material: High temperature oil resistance performance plastic materials, extinct by itself
- Operating temp: -25°C to +55°C,
- Storage temp: -40°C to +85°C
- Installed hole: Φ16mm

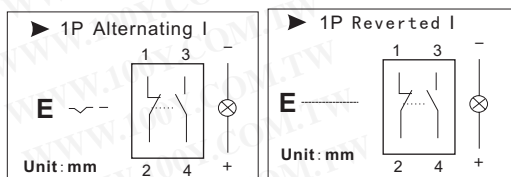

01P-RA40.Q1P



01P-RA40.Q1P+O+D24



01P-RA40.Q1P+R+L24

Color: ○ ● ● ●




Part No.	Product No.	Manufacturer	Description	Installed Aperature	Contact Function	Contact Rating	Button/Body Color	Lamp (V)
18014	01P-RA40.Q1P	META	Rectangular Alternative Button Sitches With Lamp	φ 16mm	1A1B	250VAC/5A		
12925	01P-RA40.Q1P+O+D24	META	Momentary Button Sitches With Lamp	φ 16mm	1A1B	250Vac/5A	Red	28Vdc
42741	01P-RA40.Q1P+R+L24	META	Momentary Button Sitches With Lamp	φ 16mm	1A1B	250Vac/5A		

CHARACTERISTIC:

- Installed hole 16m/m, Available in three sizes appearance:
Square 18*18mm
Circle 18m/m
- Rectangular 18*24 mm
- Offer built-in standard type, to avoid infiltration of liquids before the panel.
- Heightening borders to prevent unnecessary mistakenly touch actuator.
- The use of micro-structure T13 / 4 Baizhi lights, and LED lights Helium Neon Glow Indicator Lamp.
- A fast switching agencies, contact can automatically remove carbon deposition.
- Each switch modules with a set of normally closed and a group of normally open contact.
- Use plastic fire rating UL94V0, Plastic body could extinct by itself

SPECIFICATIONS

- Contact material: Silver plated platinum
- Contact capacity: 250 VAC/5A (p. f.=0.9)
- Electrical conductivity cell life: 5A/250 VAC 50, 000
4A/250 VAC 60, 000
2A/250 VAC 200, 000
1A/250 VAC 400, 000
- Max insulated voltage: In all terminals and some plastic shell, 4000VAC, 50HZ, 1 minute
- Insulated resistance: <500 VDC, >10⁴MΩ
- Resistance welding temperature: 200°C/5sec
- Shell material: High temperature oil resistance performance plastic materials, extinct by itself
- Operating temp: -25°C to +55°C,
- Storage temp: -40°C to +85°C
- Installed hole: Φ16mm



01P-RA40.S2P



01P-RA40.S2P+R+L24



01P-RA40.S2P+Y+L24



Color: ○ ● ● ● ●

Part No.	Product No.	Manufacturer	Description	Installed Aperature	Contact Function	Contact Rating	Button/Body Color	Lamp (V)
39353	01P-RA40.S2P	META	Rectangular Alternative Button Sitches With Lamp	φ 16mm	2A2B	5A/ 250VAC	BLUE	250VAC/5A
44870	01P-RA40.S2P+B+L24	META	Rectangular Alternative Button Sitches With Lamp	φ 16mm	2A2B	5A/ 250VAC	BLUE	24V
33206	01P-RA40.S2P+R+L24	META	Rectangular Alternative Button Sitches With Lamp	φ 16mm	2A2B	5A/ 250VAC	RED	24V
43933	01P-RA40.S2P+V+L24	META	Rectangular Alternative Button Sitches With Lamp	φ 16mm	2A2B	5A/ 250VAC	Dark Green	24V
43938	01P-RA40.S2P+Y+L24	META	Rectangular Alternative Button Sitches With Lamp	φ 16mm	2A2B	5A/ 250VAC	Yellow	24V



01P-RI40.Q



01P-RI40.S

Weight	Welding about 5gw Interpolation about 7.8gw
Safety norms	
Lamp power	Input voltage
Tungsten Lamp	DC06, DC12, DC24V
Helium Neon Glow Indicator Lamp	AC110, AC220V
LED Lamp	AC/DC: 6, 12, 24V

Part No.	Product No.	Manufacturer	Description	Installed Aperature	Contact Rating	Button/Body Color	Lamp (V)
28500	01P-RI40.Q	META	Rectangular Momentary Button Sitches With Lamp	φ 16m/m	5A/250VAC	oblong	48V,0.8W
16910	01P-RI40.S	META	Rectangular Momentary Button Sitches With Lamp	φ 16m/m	5A/250VAC		



T E L : Taiwan : 886-3-5753170
F A X : Taiwan : 886-3-5753172
E-mail : Taiwan : us_sale@100y.com.tw

Shenzhen : 86-755-83298787
Shenzhen : 86-755-83640655
Shenzhen : 100y@163.com

Shanghai : 86-21-54151736
Shanghai : 86-21-64605107
Shanghai : 100y-1@163.com