



Switches & Control Gear

Standard Illuminated With Snap-action Switch Element

Detailed product specifications are available on: us.100y.com.tw



Contact type	1Pole=1A1B; 2Poles=2A2B
Actuating itinerary	3mm
Road to power	1Pole about 120gw; 2plose about 250gw
Mechanical life	Reverted 1*10 ⁶ ; Alternating 1*10 ⁶
Weight	Welding 1P about 7gw; Welding 2P about 8gw



Part No.	Product No.	Manufacturer	Description	Installed Aperture	Contact Function	Contact Rating	Button/Body Color
30309	01P-SM40.Q1P	META	Rectangular Momentary Button Sitches With Lamp	φ 16mm	1A1B	250VAC/5A	square
29160	01P-SM40.S2P	META	Rectangular Momentary Button Sitches With Lamp	φ 16mm	2A2B	250VAC/5A	



Part No.	Product No.	Manufacturer	Description	Installed Aperture	Contact Function	Contact Rating	Lamp (V)
28303	30-530.02	EAO	Standard Illuminated With Snap-action Switch Element	φ 24*35mm	2A2B	250Vac /5A	
28307	30-530.04	EAO	Standard Illuminated With Snap-action Switch Element	φ 24*72mm	2A2B	250Vac /5A	6V




SPECIFICATIONS

Data:	5A@250 VAC-UL, VDE, Nemko, Semko, Demko, Fimko, CSA 8A@125 VAC - UL, CSA 2A@250 VAC - UL, CSA 6A@24 VDC - UL, CSA
Mechanical life:	≥100,000 cycles
Electrical life:	≥50,000 cycles
Contact resistance:	100mΩmax. typical; initial @ 2-4 VDC
Insulated resistance:	>1,000mΩ
Dielectric strength:	>1,500 volts 1 minute >3,000 volts between poles
Drive power:	300g/pole
Operating temp	-20°C to 55°C

MATERIALS

Switched Rack:	Polyetherimide (PEI)
Contacted rack:	Diallyl phthalate (DAP)
Lens:	Polycarbonate (PC)
Contact:	Silver plated copper alloy
Terminal:	Silver plated copper alloy

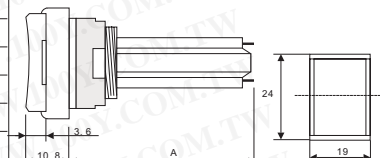

Part No.	Product No.	Manufacturer	Description	Installed Aperture	Contact Function	Contact Rating
3220	31-121.0252	EAO	Rectangular Momentary Button Sitches (soldering)	φ 16mm	1A1B	5A/ 250VAC
27746	31-122.0252+2		Rectangular Momentary Button Sitches (soldering)	φ 16mm	1A1B	5A/ 250VAC
4848	31-261.0252		Alternative Push Button Switches	φ 16mm	1A1B	5A/250V
29270	31-262-0252	EAO	Rectangular Momentary Button Sitches (soldering)		2A2B	5A/ 250VAC




Part No.	Product No.	Manufacturer	Description	Installed Aperture	Contact Function	Contact Rating
28305	31-263.0252		Rectangular Momentary Button Sitches (soldering)	φ 16mm	3A3B	5A/ 250VAC
28306	31-264.0252	EAO	Rectangular Momentary Button Sitches (soldering)	φ 16mm	4A4B	5A/ 250VAC



SPECIFICATIONS

Data:	5A@250 VAC-UL, VDE, Nemko, Semko, Demko, Fimko, CSA 8A@125 VAC - UL, CSA 2A@250 VAC - UL, CSA 6A@24 VDC - UL, CSA
Mechanical life:	≥100,000 cycles
Electrical life:	≥50,000 cycles
Contact resistance:	100mΩmax. typical; initial @ 2-4 VDC
Insulated resistance:	>1,000mΩ
Electrical strength:	>1,500 volts 1 minute >3,000 volts between poles
Drive power:	300g/pole
Operating temp	-20°C to 55°C

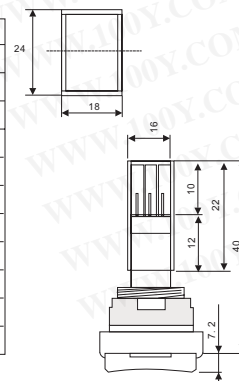

MATERIALS

Switched Rack:	Polyetherimide (PEI)
Contacted rack:	Diallyl phthalate (DAP)
Lens:	Polycarbonate (PC)
Contact:	Silver plated copper alloy
Terminal:	Silver plated copper alloy

Part No.	Product No.	Manufacturer	Description	Installed Aperture	Contact Function	Contact Rating	Button/Body Color
19826	41-421.036	EAO	LOW-LEVEL SWITCHES, DPST, MOMENTARY	φ 18*24mm	DPST (2 N.O.)	48V/1.2W	White/Black
19812	41-121.015	EAO	Indicator, Lighted Pushbuttons with Snap Acting Switch Element	φ 24*18	2Pole	250VAV/5A	White/Black
19825	41-261.025	EAO	Indicator, Lighted Pushbuttons with Snap Acting Switch Element	24*18	1Pole	250VAV/5A	White /Black



T E L : Taiwan : 886-3-5753170
F A X : Taiwan : 886-3-5753172
E-mail : Taiwan : us_sale@100y.com.tw

Shenzhen : 86-755-83298787
Shenzhen : 86-755-83640655
Shenzhen : 100y@163.com

Shanghai : 86-21-54151736
Shanghai : 86-21-64605107
Shanghai : 100y-1@163.com