


# Switches & Control Gear

## Illuminated Power Rocker Switch

Detailed product specifications are available on: [us.100y.com.tw](http://us.100y.com.tw)




Part No.	Product No.	Description	Pins/Terminal Type	Contact Type	V/VAC	Button/Body Color
29037	6093E-WR-2	Rocker Switch With Lamp	4	ON-OFF	15A/250Vac	ILLUMINATED

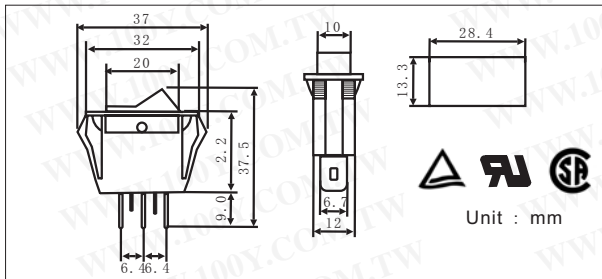

Model	The characteristic
TL600B	3P SPST ON-OFF
Spec	125VAC-16A, 250VAC-10A
Contact resistance	50Ω MAX.
Insulated resistance	DC 500V 100Ω MIN.
Withstanding voltage	AC 1500V 1 Minute

- 6100B contents 110 V neon lights
- W/110V NEON LAMP
- Foot line / terminal model: 3P

Part No.	Product No.	Description	Pins/Terminal Type	Contact Type	V/VAC	Button/Body Color
4235	6100B-3P	Rocker Switch With Lamp	3	ON-OFF	10A/250Vac	Red Button/Black Background 13.5*28

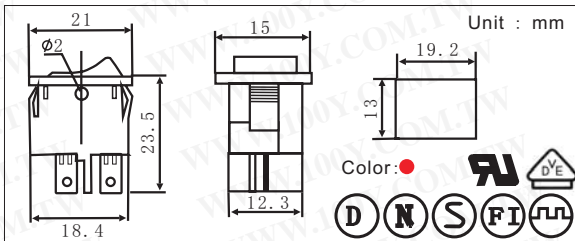

Model	The characteristic
TL600B	3P SPST ON-OFF
Spec	125VAC-16A, 250VAC-10A
Contact resistance	50Ω MAX.
Insulated resistance	DC 500V 100Ω MIN.
Withstanding voltage	AC 1500V 1 Minute

- Illuminated switches
- 110 V neon contents
- W/ 110V NEON LAMP
- Foot line / terminal model: 3P

Part No.	Product No.	Description	Pins/Terminal Type	Contact Type	V/VAC	Button/Body Color
3463	6110B	Rocker Switch With Lamp	3 Pin	SPST	5A/250Vac	Red Button/Black Background




### SPECIFICATIONS


1. Spec: 10A 125VAC/6A 250VAC T85  
T 16A 125VAC/10A 250VAC
2. Contact resistance: 20Ω (MAX.)
3. Insulated resistance: DC500V 100Ω (MIN.)
4. Dielectrical strength: 1500VAC/1 Minute



Part No.	Product No.	Description	Pins/Terminal Type	Contact Type	V/VAC	Button/Body Color
45288	811082781K	Rocker Switch	3P	ON-OFF	20A/250Vac	Green Button/Black Background
39496	MR-21C-Q-R/B-3	Rocker Switch With Lamp	4P	ON-OFF(III)	10A/125VAC	Red Button/Black Background

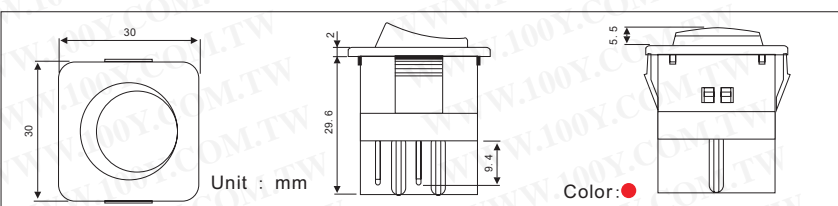

Part No.	Product No.	Description	Pins/Terminal Type	Contact Type	V/VAC	Button/Body Color	Indicators
15086	R13-104B-B/R	Rocker Switch	4P/DPST	ON/OFF	16A 125VAC/10A 250VAC	Red/Black	ILLUMINATED 220V



- Indicator: ILLUMINATED
- Foot line / terminal model: 3P
- Color: ●

SPEC	The characteristic
Contact resistance	50m ohm MAX.
Insulated resistance	DC 500V 100m ohm Min.
Dielectric strength	AC 1500V 1 Minute
Circuit	3P SPST OFF-NO (ILLUMINATED)
Operating temp	-20°C TO 85°C

Part No.	Product No.	Description	Pins/Terminal Type	Contact Type	V/VAC	Button/Body Color	Indicators
14133	R13-112BP-02	Rocker Switch	3P	ON-OFF	10A125VAC/6A250VAC	Red Button/Black Background(125VAC33K? /250VAC150K)	ILLUMINATED



T E L : Taiwan: 886-3-5753170  
 F A X : Taiwan: 886-3-5753172  
 E-mail : Taiwan: [us\\_sale@100y.com.tw](mailto:us_sale@100y.com.tw)

Shenzhen: 86-755-83298787  
 Shenzhen: 86-755-83640655  
 Shenzhen: [100y@163.com](mailto:100y@163.com)

Shanghai: 86-21-54151736  
 Shanghai: 86-21-64605107  
 Shanghai: [100y-1@163.com](mailto:100y-1@163.com)