



Ethernet Products

Ethernet Transceivers

Detailed product specifications are available on: us.100y.com.tw**DINTEK**

Part No.	Product No.	Manufacturer	Description
20559	JT1000-02	DINTEK	10B-T AUI to UTP Transceivers

**ORDER NUMBER**

- 10BASE2 Transceiver Included in this package
- 10BASE2 Transceiver
- User's Guide
- T-connector

KEY FEATURES

- IEEE 802.3 10BASE2 compliancy (10Mbps, CSMA/CD)
- One LED to indicate power
- SQE enable/disable switch

INTRODUCTION

This Transceiver is provided to connect DTE (Data terminal equipment) equipped with a AUI port to 10BASE2 Ethernet local area network in a simple way and also supplied with a SQE switch (Heartbeat function) for simple network configuration.

DINTEK

Part No.	Product No.	Manufacturer	Description
15765	JTB000-01	DINTEK	Ethernet 10BASE2 Transceiver

Remote Identifier Kit
MODEL: RID45-234**Remote Identifier Kit**
MODEL: RID45-5678

- Size: 170x52x38mm
- Test cable length: min: 1.2M
max: 150M



Part No.	Product No.	Manufacturer	Description
21887	RID45-234	TES	Outlying accessories 1(TES-45A)
21888	RID45-5678	TES	Outlying accessories 1(TES-45A)

TES**WEB**

- Connector: RJ-45 connector
- Speed: 10Mbps
- Communication convention: ARP, IP, ICMP, UDP, TCP, HTTP, DHCP
- Connector mode: TCP server/Client: UDP Client
- Setting: HTTP (IE & Netscape)

SPECIFICATION

- CPU: 8-bit W78E58, 36, 864MHz
- RAM: 32KB

Part No.	Product No.	Manufacturer	Description
23970	e-P132	AQT	TCP/IP 10M

Transceiver Drop Cable (IEE 802.3)

Detailed product specifications are available on: us.100y.com.tw

- Use for transceiver and web card connection, either use 100% steel shell insulated outside disturb
- 4 pair 20AWG in wire

DINTEK

Part No.	Product No.	Description	Length
10754	AUI Cable 15M/F	AUI Cable Transceiver Drop Cable	15 Ft.
3918	AUI Cable 15M/M	AUI Cable Transceiver Drop Cable	15Ft.

Twisted Pair Wiring Testers

Detailed product specifications are available on: us.100y.com.tw

- Size: 10.5*9.5*3cm
- Weight: 135g

Part No.	Product No.	Description
35260	LT-118	Web Wiring Testers

**SPECIFICATION**

- Dimensions main: 125mmx68mmx26mm
remote: 130mmx32mmx26mm
- Operating temp: 0°C~45°C
- Weight: 0.37lb. 0.17kg
- Power Req: One DC 9V battery

Part No.	Product No.	Description
14869	NPH-41	Twisted Pair Wiring Tester With BNC

- Connect socket: PJ45 & BNC
- Cable grade: CAT3, CAT4, CAT5
- Size/Weight: 150mmx72mmx35mm/Approx. 215g

- Operating environment: operating: 0°C~+40°C
deposited: -20°C~+60°C



Part No.	Product No.	Manufacturer	Description
21890	RID46-234	TES	Outlying accessories 1(TES-46A)
21891	RID46-5678	TES	Outlying accessories 1(TES-46A)

TES



Twisted Pair Wiring Testers

Detailed product specifications are available on: us.100y.com.tw

- Multi-network cable tester is specified to quickly test by auto scanning the wires continuity, miss-wiring and polarization in your network cables.
- By using the attached remote terminator, you can easily test the cables installed
- Also allow you to test the ground of shielded twisted pairs cable

Part No.	Product No.	Description
22711	ST-45	Twisted Pair Wiring Testers



- Connect socket: PJ45 & BNC
- Size/Weight: 170mmx52mmx38mm/Approx. 180g
- Operating environment: Operating: 0°C~+50°C
Deposited: -20°C~+60°C



Part No.	Product No.	Manufacturer	Description
21886	TES-45A	TES	Web Wiring Testers



- Connect socket: PJ45 & BNC
- Cable grade: CAT3, CAT4, CAT5
- Size/Weight: 150mmx72mmx35mm/Approx. 215g
- Operating environment: operating: 0°C~+40°C
deposited: -20°C~+60°C



Part No.	Product No.	Manufacturer	Description
21889	TES-46	TES	Web Wiring Testers

Optical Fiber Cable

Detailed product specifications are available on: us.100y.com.tw

- Multi-mode
- 54V00#MCC1-01
- Easy connect, convenience
- Good optic index



Part No.	Product No.	Description	Length
12851	54V003MCC2-01	Optical Fiber 2CC	3M
12881	54V015MCC2-01	Optical Fiber 2CC 15M	15M



- Adopt type Zipcord, suitable for 568SC regulation
- According to TIA FOTP test regulation

Part No.	Product No.	Description	Length
15956	SC-SC	SC TO SC Optical Fiber	10M

Data-comm. connectors & Tools
Couplers and AdaptersDetailed product specifications are available on: us.100y.com.tw

Part No.	Product No.	Manufacturer	Description
2587	29I15028811-01	DINTEK	RJ45 F -F Adaptors



Used for networking and some business telephones and can be found under rj45 accessories



Part No.	Product No.	Manufacturer	Description
2762	29T16038811-01	DINTEK	T Type RJ45 FFF Adaptors

Modular Data Network Cables

Detailed product specifications are available on: us.100y.com.tw

For pair standard UTP, 24AWG Conductor

Part No.	Product No.	Description	Length (M)	M/F,M/M,F/F
15880	NET-CBL-P100M	PRO-BEST CAT.5	100M	M/M





Modular Data Network Cables

Detailed product specifications are available on: us.100y.com.tw



SPECIFICATIONS

- LAN cable suitable for perfect audio, data and video transfer
- UTP/FSTP/STP
- Solid/stranded
- Molded or assembly type
- With or without protector cover (S. R.)
- Color: black/red/white/orange/gray/ivory/green/blue/yellow
- Temperature rating: 75 degree C
- Spark test: AC 2000V/0.15 sec Min
- Dielectric strength: AC 750V/1 sec Min
- Insulation resistance: PE: DC-500V 1500M omega/100M Min at 20 degree C
- Mutual capacitance: 5.6nF/100M. Max
- Pair to ground unbalance: 330pF/100M. Max

Part No.	Product No.	Description	Length (M)	M/F,M/M,F/F
17587	518G1088A8-02	Cat.6 UTP Cable	100M	M/M
10387	N-1	"Master Cable" UPT CAT.5e	1M	RJ-45 M/M
7819	N-10	"Master Cable" UPT CAT.5	10M	RJ-45 M/M
5514	N-15	"Master Cable" UPT CAT.5e	15M	RJ-45 M/M
5513	N-2	"Master Cable" UPT CAT.5e	2M	RJ-45 M/M
5517	N-20	"Master Cable" UPT CAT.5e	20M	RJ-45 M/M
7817	N-3	"Master Cable" UPT CAT.5e	3M	RJ-45 M/M
7818	N-5	"Master Cable" UPT CAT.5e	5M	RJ-45 M/M



- Male to male
- RG58A/U

Part No.	Product No.	Description	Length (M)	M/F,M/M,F/F
8424	N-58-1	RG 58A/U Modular Data Network Cable	1M	M-M
5561	N-58-10	RG58A/U AUI Cable Transceiver Drop Cable	10M	M-M
10296	N-58-15	RG58A/U AUI Cable Transceiver Drop Cable	15M	M-M
9637	N-58-20	RG58A/U AUI Cable Transceiver Drop Cable	20M	M-M
5547	N-58-3	RG58A/U AUI Cable Transceiver Drop Cable	3M	M-M
20106	N-58-30	RG58A/U AUI Cable Transceiver Drop Cable	30M	M-M
8423	N-58-5	RG 58A/U Modular Data Network Cable	5M	M-M
5549	RG58A/U-2M	RG58A/U AUI Cable Transceiver Drop Cable	2M	M-M



- Length: 1.0m
- Suitable for PC, Telephone etc

Part No.	Product No.	Manufacturer	Description	Length (M)	M/F,M/M,F/F
18147	NT-69	SCE	RJ 8P TO 8P Adaptor	1M	M/M

Modulter adaptor

Detailed product specifications are available on: us.100y.com.tw




DESCRIPTION

DB 9 male/RJ-12 6-wire
DB 9 to RJ-12 Adaptor




Part No.	Product No.	Description
16467	CG-9FT6	RS-232 9 to 6C JACK Adaptors




Part no.	Function	Description
GC-15MT8	DB 15 Male/RJ-45 8-wire	Db15 to RJ-45 Adapter

Part No.	Product No.	Description
3400	GC-15MT8	RS-232 15M/RJ45 8P8C Modular Adaptor

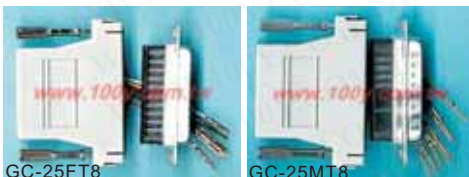

Part no.	Function	Description
GC-25FT6	DB 25 Female/RJ-12 6-wire	DB25 to RJ-12 Adapter
GC-25FT8	DB 25 Female/RJ-45 8-wire	DB25 to RJ-45 Adapter
GC-25MT8	DB 25 male/RJ-45 8-wire	DB25 to RJ-45 Adapter



Part No.	Product No.	Description
3401	GC-25FT6	Modular Adaptor 6P
6347	GC-25FT8	RS-232 25F/RJ45 8P8C Adaptor
3839	GC-25MT8	RS232-25M/RJ45 8P8C Adaptor





Modulter adaptor

Detailed product specifications are available on: us.100y.com.tw



GC-9FT4



GC-9FT8

GC-9MT8



6C or 4C



8C

Part no.	Function	Description
9FT4	DB 9 Female/RJ-11 4-wire	DB9 to RJ-11 Adapter
GC-9FT8	DB 9 Female/RJ-45 8-wire	DB9 to RJ-45 Adapter
GC-9MT8	DB 9 male/RJ-45 8-wire	DB9 to RJ-45 Adapter

Part No.	Product No.	Description
3398	GC-9FT4	RS232-9F/RJ11 6P4C Moduler Adaptors
3838	GC-9FT8	RS232 9F-RJ45 8P8C Adaptor
3399	GC-9MT8	RS-232 9M/RJ45 8P8C Modular Adaptors



y. e. 0. 36

Part No.	Product No.	Description
16844	GC-9MT6	RS-232 9M/RJ45 8P4C Adaptor

RJ45 Data Plugs

Detailed product specifications are available on: us.100y.com.tw



MATERIAL AND FINISH

- Housing: poly carbonate
- Contact: copper alloy 50u" gold over nickel plate

MECHANICA

- Cable-to-plug tensile round & flat cable available
- Strength: 20lbs, min
- Durability: 750 cycles min

ELECTRICAL

- Current rated: 30VAC at 1.5Amps
- Contact resistance: 10 milliohms max
- Dielectric strength: 1000VAC (RMS)
- Insulation resistance: 500 Megaohm min



Part No.	Product No.	Manufacturer	Description	Parking
3792	2P38803-01	DINTEK	RJ45 PLUG Data Plug 50u", UL & CSA	100Pcs/Packing
2590	2P38823-01	DINTEK	RJ45 PLUG Adaptors 50u", UL & CSA	10Pcs/Packing
12480	NET-PLG-PRO10/5e		RJ45 Data Plug -8P8C	10Pcs/Packing
12481	NET-PLG-PRO100-5e		RJ45 PLUG-8P8C-Data Plug	100Pcs/Packing



- Housing material: polycarbonate, UL94V-2 No poison
- Material contact: phosphor bronze
- Housing color: Transparence
- Operation temperature: -40°C to 125°C
- Cable to tensile strength: 7.7kgs

Part No.	Product No.	Description
18119	NC-0216-00	Cat.6 RJ45 Data Plug 10P10C



- Material: polycarbonate, UL94V-2
- Rating voltage/current: 150VAC, 1.5A
- Insulated voltage resistance: 1000VAC
- Insulated resistance: 500Megaohms



Part No.	Product No.	Manufacturer	Description	Parking
3334	NET-PLG-AMP100-5e	AMP	RJ45 Data PLUG 8P8C	100Pcs/Packing
2585	NET-PLG-AMP100-5e-10 Pcs/Packing	AMP	RJ45 PLUG 50u"	10Pcs/Packing



8P8C PLUG Cat.6

Part No.	Product No.	Description	Parking
18017	NET-PLG-PRO-6/10	8P8C PLUG Cat.6	10Pcs/Packing



- 100PCS
- RJ-45 import 3 claw AMP gild connector



Part No.	Product No.	Manufacturer	Description	Parking
16274	NET-PLG-STP/AMP	AMP	AMP Data Plug (Shielded)	10Pcs/Card



- Material: polycarbonate, UL94V-2
- Rating voltage/current: 150VAC, 1.5A
- Insulated voltage resistance: 1000VAC
- Insulated resistance: 500Megaohms

Part No.	Product No.	Description
14353	NET-PLG-STP10	RJ45 STP PLUG (Metalized) 50u"





Strain Relief Hoods

Detailed product specifications are available on: us.100y.com.tw




Provide manifold color, manage easily
Have protect action and could prevent RJ45 plug & UTP cable fall off

Part No.	Product No.	Description	Packing
7460	NET-BOT-PRO-G	RJ45-Strain Relief Hoods	
6579	NET-BOT-PRO-R	RJ45-Strain Relief Hoods	
6035	NET-BOT-PRO-W	RJ45-Strain Relief Hoods	
5762	NET-BOT-PRO-Y	RJ45-Strain Relief Hoods	
6034	RJ45-60-BL	RJ45-Strain Relief Hoods	10Pcs/Packing
6614	RJ45-60-GY	RJ45-Strain Relief Hoods	10Pcs/Packing
15297	RJ45-60GE	RJ45-Strain Relief Hoods	10Pcs/Packing
15298	RJ45-60R	RJ45 Strain Relief Hoods	10Pcs/Packing
15317	RJ45-60Y	RJ45-Strain Relief Hoods	10Pcs/Packing
7459	T-8CC-OR	RJ45-Strain Relief Hoods	10Pcs/Packing

Data Plug Crimp Tool Kit

Detailed product specifications are available on: us.100y.com.tw



GENERAL SPECIFICATIONS:

- Length: 8" (203±3mm)
- MT' L: 3.2mm Low carbon steel
- Hardness: HR30N 55°C~65°C
- Frame: black oxide finished

Part No.	Product No.	Description
14839	DL-1008	8P8C/RJ45 Data Plug Crimp Tool Kit



HT-	2000D
CRIMPER	2008R
PLUGS	8P8C*20PCS
	6P6C*30PCS
	4P4C*40PCS

Box size: 260 (L) *200 (W) *48 (H) mm



Part No.	Product No.	Description
10007	HT-2000D	Data Plug Crimp Tool Kit 4P-6P-8P(RJ45)



8" Prof. More in one Modular Crimping Tool

Cuts, strips and crimps all kinds of modular plug without changing modular die set

HT-	FOR CRIMPING MODULAR PLUG	RATCHET
2008R	8P8C/RJ-45, 6P6C/RJ-12, 6P4C/RJ-11, 4P4C & 4P2C PLUGS&DEC/OFF SET PLUG-6P6C	YES

Part No.	Product No.	Description
4819	HT-2008R	Data Plug Crimp Tool Kit For 8P8C,6P6C,6P4C,4P4C,4P2C,6P6C DEC



- Straight motion and precise crimping
- Cuts, strips, and crimps all kinds of modular plugs without changing modular (Die) set
- More in one for crimping solid & stranded wire work with all standard plugs: AMP, SS, AT&T, licence.....etc.
- Tool HT-200/200R design with 10 position punch. For crimping 8P8C plug, please use the AMP 8P8C plug with 2 cavities on each side as shown in fig1
- For stripping there is a length guide at the inside of 6mm area, Insert 4P or 6P conductor wire up to the length guide (GUIDE BY ZINC PLATING) then press handles and pull wire to get right stripping, As 12mm is decided by cutting blade insert 8P or 10P conductor wire over cutting blade, so that the tool cuts and strips wire at the same time

Part No.	Product No.	Manufacturer	Description
18060	HT-200R	HANLONG	Professional Modular Crimps, Strips & Cuts Tools



Modular Plug Crimps, Strips & Cuts Tool

With closed lock for stored, use on stranded wire only

HT-	FOR CRIMPING MODULAR PLUG	RATCHET
201C	8P8C/RJ-45 (Available for stripping round cable.)	YES

Part No.	Product No.	Description
29192	HT-2092C	Data Plug Crimp Tool Kit For Crimping 10P10C
5842	HT-210C	Data Plug Crimp Tool Kit For Crimping 8P8C (RJ45)





Data Plug Crimp Tool Kit

Detailed product specifications are available on: us.100y.com.twFor stripping wire diameter $\Phi 5-\Phi 6.2\text{mm}$, made of poly-resin, economic type

Part No.	Product No.	Manufacturer	Description
18061	HT-308	HANLONG	Easy Stripper for UTP/STP Telecom Wire



Impact Punch Down Tool

- With adjustable impact pressure control
- The storage on the top of tool is for storing one piece of spare blade
- Blades are interchangeable and reversible

Complete tool	Handle	BLADE	For terminal block
HT-314B	HT-3140	HT-14B	Use on 110/88 type



Part No.	Product No.	Description
9841	HT-314B	Impact Punsh Down Tool 110/88-TYPE



Dual-Modular Crimping Tool

- Straight motion & professional type, provide precise operation with key way in 8P modular holder
- Modular holders are mode of AL-ZN. Alloy light weight & durable.
- Suitable for both stranded & solid wire. (UTP/STP)

HT-	FOR CRIMPING MODULAR PLUG	RATCHET
500	8P8C/RJ-45, 6P6C/RJ-12, 6P4C/RJ-11 PLUGS	NO



Part No.	Product No.	Description
4820	HT-500	Data Plug Crimp Tool Kit 8P8C/RJ-45,6P6C/RJ-12,6P4C/RJ-11



Dual-Modular Crimping Tool

For cuts, strips, and crimps 2 type of plugs in 1



HT-	FOR CRIMPING MODULAR PLUG	RATCHET
568R	8P8C/RJ-45, 6P6C/RJ-12, 6P4C/RJ-11	YES

Part No.	Product No.	Description
5835	HT-568R	Data Plug Crimp Tool Kit For 8P8C/RJ-45,6P6C/RJ-12,6P4C/RJ-11



HT-210C Type Replacement Blade

Part No.	Product No.	Description
40266	HT-RB08S	HT-210C Type Replacement Blade

Turning 3 circles to extract the jacket of UTP cable,
Both function for stripper and 110 tool**DINTEK**

Part No.	Product No.	Manufacturer	Description
2764	K111-01	DINTEK	UPT(RJ45) Cable Stripper

Line Drivers/Converters
RS232 to RS422/RS485
Bi-directional ConvertersDetailed product specifications are available on: us.100y.com.tw

- Input: RS-232
- RS-422 joining: DB-9 (female)
- Output: RS-485/RS-422
- RS-422/485 joining: just plug in and go
- Insulated voltage: 3000Vdc
- Rate (bps) :1200, 2400, 4800, 9600, 19. 2K, 38. 4K, 57. 6K, 115. 2K

ADAM

Part No.	Product No.	Manufacturer	Description	Connector
15192	A25-4520	ADVANTECH	RS-232 to RS-422/RS485 Converter	9F/10P Terminal



IDC-01B

- RS-232 vs RS-485 Bi-directional converter
- Could make RS232 change as RS422/RS485 Use standed balanced voltage digital interface
- Increase transmit distance, max: 1.2 kilometer
- Restrain disturb noise

KARA
KARA TECHNOLOGY CORP.

IDC-02B

Part No.	Product No.	Description	Connector
6902	IDC-01B	RS232 TO RS422/485 Bi-directional Converter	DB25/DB25
6899	IDC-02B	RS232-422/485 Bi-directional Converter	DB25/DB25





RS232 to RS422/RS485 Bi-directional Converters

Detailed product specifications are available on: us.100y.com.tw



- Transmit rate: up to 100Kbps under 1200m[4000']
- Length: 1200m[4000'] (max)
- Electricity consuming: DC 9V 150mA(max.)
- Shell: plastic
- Weight: 60g
- Volum (LxWxH) : 74. 5x54X18. 5mm



Part No.	Product No.	Description	Connector
5315	RS232/HM485	RS232/485 Bi-Directional Converter	DB25M/RJ11



SPECIFICATIONS

- Input: standard D-sub9 pin female connector
- Output: RS485 differential 2 half-duplex wires
Rs422 differential 4 full-duplex wires
- Distance: RS 422 / 485 up to 4000ft. (1250 meters)
- LEDs: PWR, TX, RX, and RS422, 485 statuses CED.
- Format: asynchronous data with any combination of bits parity stop
- Temperature: 0-65°C (32-150F) ambient
- Humidity: 10-90% non-condensing
- Voltage: 10-30V DC
- Power: under 1 watt (typical) + external load
- Size: 742 (W) x111 (L) x265 (H) (Frame) with connectors: 52 (W) x85/mm

Part No.	Product No.	Manufacturer	Description	Connector
17883	TRP-C06	Trycom	RS232 To RS422/485 Isolated Converter	9F/10P Terminal



SPECIFICATIONS

- Plug-in screw terminal wiring: accepts AWG 1-#12 to #22 to #22 (0.5 to 2.5mm) wires
- Supported band rates (bps) :1200, 2400, 4800, 9600, 19. 2K, 38. 4K, 57. 6K, 115. 2K
- Storage temperature: -25°C~85°C (13~185F)
- Operating temperature: 0~70°C (32~158F)
- Requirement: DC in from +10V to 30V or external +12V DC in
- Converted signals: RS422 or RS485 mode external switch
- Power consumption: under 1W
- Isolation voltage: 3000V DC
- Accessories (supplied): nylon Din-rail mounting adapter SECC panel mounting bracket
- RS-422/485 connector: industrial plug-in screw terminal
- Operating temperature: 0 to 55°C
- Power requirement: Unregulated+10 to +30VDC with protection from power reversals
- Humidity: 5-95%, non-condensing

Part No.	Product No.	Description	Connector
17884	TRP-C07	RS422/485 Isolated Converters	10P Terminal /10P Terminal



SPECIFICATIONS

- Converted signals: RS-232/RS-422 or RS-485 auto switching (jumper less)
- USB interface connector: USB type B
- USB Controller: compatibility USB specification 1.1 standard
- Isolation voltage: 3000V DC
- Power requirement: by USB bus power
- Handshake: RS-232 support RTS & CTS handshake signals
- Auto switching baud rate (bps) :300~115, 2kpbs
- RS-232/RS-422/RS-485 connector: plug-in screw terminal
- Isolation side : RS-2322/485
- Power consumption: 0. 65W
- Operating temperature: 0~70°C (32~158°F)
- Storage temperature: -25~85°C (13~185°F)
- Humidity: 5~95%, non-condensing
- Transmission and receiving LED indicator

Part No.	Product No.	Manufacturer	Description	Connector
17885	TRP-C08	Trycom	USB TO 232/422/485 Isolated Converter	USB/10P Terminal



SPECIFICATIONS

- ST (multi-mode) fiber port
- Support the fiber cable: 62. 5/125um
- Wave length: 850nm
- Minimum 3000V DC isolation protection
- Transient suppression on RS-485 data line
- Auto direction flow control on Rs485 side
- Accept industrial standard +24V DC unregulated power
- Auto swithing the RS232/422 and RS485 signal
- PWR /Fiber-TX/Fiber-RX mode LED indicates
- Power requirement: +10V to 30V
- Support external standard DC jack power adapter input
- Two wire Rs485 operation with automatic turnaround or four wires RS422 full duplex
- Distance RS 422/485 up to 4000ft(1250meters)
- For mat: asynchronous data with any combination of bits, parity, stop
- Operating temperature: -20°C-65°C
- Humidity: 10-90% non-condensity
- Power: under 1. 8 watt
- Size: 74mm (W) x111mm (L) x26mm (H)

Part No.	Product No.	Manufacturer	Description	Connector
29431	TRP-C39	Trycom	RS232/422/485 Isolated To Fiber Optical Converter	RS232

Patch Panels RJ45 Wall Outlets

Detailed product specifications are available on: us.100y.com.tw



Shutter

Icon: each port supplied with one

Wall plate with shutter

DINTEK



Part No.	Product No.	Manufacturer	Description
3301	24021013-01	DINTEK	RJ45 Wall Outlets (1 Aperture)





RJ45 Wall Outlets

Detailed product specifications are available on: us.100y.com.tw

ID label

Computer icon (blue) and one telephone icon (green)



Part No.	Product No.	Manufacturer	Description
2581	24021023-01	DINTEK	RJ45 Wall Outlets



The flush plate fits all types of standard keystone jacks, The screw cap design makes better front looking

Icon: Each port supplied with computer icon and telephone icon

Blue show computer, green show telephone

Shutter



Part No.	Product No.	Manufacturer	Description
15399	24021031-01	DINTEK	RJ45 Wall Outlets Cover (3 Apertures)

**SPECIFICATIONS:**

- UL Certified

PHYSICALS

- Housing: high impact flame retardant plastic, UL 94V-0 rated, white color
- Dimension (H*W*D) : 3.8cm*6.8*cm*11.3cm



Part No.	Product No.	Manufacturer	Description
2583	251-04	DINTEK	Wall Outlets In Wall Box



Material: ABS

RJ45 Wall Outlets Cover

Part No.	Product No.	Description
14239	9040A	RJ45 Wall Outlets Cover

**DESCRIPTION:**

The screw cap design makes better front looking

2-port

Part No.	Product No.	Description
14240	9040B	RJ45 Wall Outlets Cover (2 Apertures)



RJ45 Wall outlet (4 Apertures)

Part No.	Product No.	Description
13834	TB-84	RJ45 Wall outlet (4 Apertures)

Patch Panels

Detailed product specifications are available on: us.100y.com.tw

- Save space
- joining silver-gilt 2u"~3u"
- Item: 10pair terminal panel
- Spec: can't divide up



Part No.	Product No.	Description
13213	172010P-01	A Type Patch Panel 123*21.5*39mm



- Organize cables on the front and/or back of a rack to give installations an extremely neat, professional appearance
- Large capacity duct to allow for quick moves adds an changes cables



Part No.	Product No.	Description
13690	9302DF01U-02	19"1U Patch Panel

- We provide various product for your choice and help you develop infinite commercial chance!

[Http://us.100y.com.tw/](http://us.100y.com.tw/)**Centenary Materials**

Waiting for your phone call







RJ45 Data Sockets

Detailed product specifications are available on: us.100y.com.tw



SPECIFICATION

- Box: UL94V-0 ABS
- Jock: RJ-45 8P 8C 50 micro inches gold plated (UL-94V-0 PBT)
- Terminal block: UL94V-0 ABS-dual type Nylon-6-66-110type
- PCB-FR-4
- Dual type block can be punched down with krone or AT&T tool
- 110 type block can be punched down with AT&T tool only





Part No.	Product No.	Manufacturer	Description
2588	21030188A4-01	DINTEK	Cat.5 Surface Mount Outlet




SPECIFICATION

- Box: UL94V-0 ABS
- Jock: RJ-45 8P 8C 50 micro inches gold plated (UL-94V-0 PBT)
- Terminal block: UL94V-0 ABS-dual type Nylon-6-66-110type
- PCB-FR-4
- Dual type block can be punched down with krone or AT&T tool
- 110 type block can be punched down with AT&T tool only



Part No.	Product No.	Manufacturer	Description
2589	21030288A4-01	DINTEK	Cat.5 Surface Mount Outlet

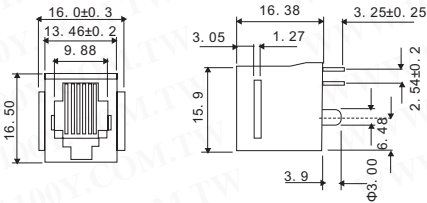

MATERIAL

- Housing-PBT polyester UL94V-0
- Mixed glass fiber
- Standard color-black
- Contacts-0.45mm Dia round phos-bronze plated with hard gold (6u")

Part No.	Product No.	Manufacturer	Description
20502	258-8P8C-RJ45	UNION	PCB JACK



- Housing: fireproof ABS UL 94V-0
- Jack: 50 micro inches gold plated



Part No.	Product No.	Manufacturer	Description
2582	2603588A9-01	DINTEK	CAT.5 KEYSTON RJ-45 JACK



ELECTRICAL

- Current rating: 1.5Amps
- Insulation resistance: 500Mega-ohms min
- Contact resistance: 20milli-ohms max
- DC resistance: 0.1ohms max
- Data transmission rates up to 100Mbps

MECHANICAL

- Plug insertion life: 750 cycle min
- Plug retention force: 30 lbs min



Part No.	Product No.	Manufacturer	Description
15398	2606266P9-01	DINTEK	6P6C Keystone Jack



MATERIAL

- Case: UL-94V-0 ABS
- Jack: RJ-45 8P8C, 50micro inches gold plated (UL-94V-0 PBT)
- PCB: FR-4

Part No.	Product No.	Description
18141	29165028812-01	RJ45 F-F Connector (Shielded)






RJ45 Data Sockets

Detailed product specifications are available on: us.100y.com.tw




- Housing: glass filled polyester UL94V-0, black
- Contact: 0.45mm diameter phosphor bronze gold plating over nickel



Part No.	Product No.	Description
24568	330S-1822-11301	RJ45 8P8C 180° Socket



- MATERIAL**
- Housing: PBT polyester UL94V-0
 - Color: black
 - Contacts: 0.45mm diameter phosphor bronze plated with hard gold
- ELECTRICAL**
- Current rating: 1.5AMP max
 - Voltage rating: 150VAC max
 - Contact resistance: 20 milliohms
 - Insulation resistance: 500Megohms min
 - Dielectric withstanding voltage: 1000VAC 1min

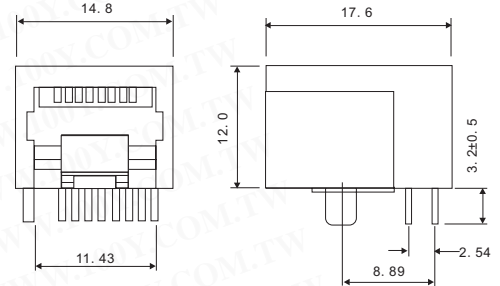

Part No.	Product No.	Description
38902	370-1811-10001	RJ45 10P8C 90° Socket



- MATERIAL:**
- Housing-PBT polyester UL94V-0
 - Color-black
 - Contacts-0.35mm thickness alloy
- Selective gold plating
Shield-0.25mm thickness
Alloy with nickel plated

Part No.	Product No.	Description
38702	610S-8811-13031	RJ45 JACK 90°



- Type : CAT5e snap-in keystone Jack (8P 8C)
- Termination: 110 style 90 degree punch down for 22-26AWG solid wire
- Use with: any computer cable store blank wall plate or patch panel
- T568A & T568B wiring compatible
- UL listed

Part No.	Product No.	Description
14238	9037	CAT.5e JACK(8P8C)




- ELECTRICAL**
- Current rating: 1.5Amp
 - Insulated resistance: 500MΩ minimum
 - DC resistance: 0.1Ω maximum
 - Contact resistance: 20mΩ maximum

Part No.	Product No.	Description
14236	9038	CAT.5 Data Plug Box
14237	9039	CAT.5 Data Plug Box



- MATERIAL**
- Housing-PBT polyester UL94V-0
 - Mixed glass fiber
 - standard color-black
 - Contact-0.45mm Dia round phosphor bronze plated with head gold

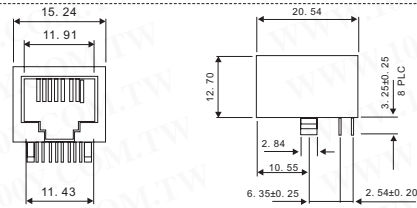

Part No.	Product No.	Description	Packing
17258	9636-8814	RJ45 8P8C 90° Socket	10Pcs/Packing



- MATERIAL**
- Plastic housing: engineering thermoplastic flammability rating UL94V-0
 - Contacts: phosphor bronze
 - plating: gold plating over nickel in contact.
 - Tin plating over nickel in solder area

Part No.	Product No.	Manufacturer	Description
22602	ERJM-S-01-8-8-1	E-Conn	PHONE-JACK CONN, 8P8C BLACK-90° LED (left green, right yellow)
22622	ERJM-S-01-8-8-4	E-Conn	PHONE-JACK CONN, 8P8C BLACK-90°

● We provide various product for your choice and help you develop infinite commercial chance!

[Http://us.100y.com.tw/](http://us.100y.com.tw/)

Centenary Materials

Waiting for your phone call

