



FIRE & SECURITY & CCTV

Intruder Alarm Panels/Systems Wireless Alarm With Solar Bell Box

Detailed product specifications are available on: us.100y.com.tw



Motion detector with security
Alarm & outdoor siren
● 120dB high output external

6230



Detector motion and activates alarm
Built-in Alarm up to 105dB
Programmable for
-up to 6 digit security code
-Alarm timing 30, 60 and 90 seconds
-Entry delay timing 20, 10 and instant alarm
-9V battery operation with DC adaptor jack

6231

Part No.	Product No.	Description
41141	6230	Motion Detector With Security Alarm & Outdoor Siren(515SK)
41140	6231	Motion Detector With Security Alarm (135A)



- Suitable range: family, factory, company, office...etc
- DIY design, no wiring, only 2 second setting time
- You needn't remove crust if you want change your code
- 100dB high out put external

Part No.	Product No.	Description
14040	CP2	Wireless Alarm With Solar Bell Box

Alarm switches

Detailed product specifications are available on: us.100y.com.tw



1. Open the battery cover in alarm unit to install a 12V battery (make sure the polarity is correct to the battery marking)
2. Stick the alarm unit (large unit) to the door/window frame by attached double-side tape
3. Stick the sensor unit (smaller unit) to the window/door by attached double-side type and make sure to align the arrow mark to the arrow on the battery cover of large unit Fig. 1
Note: the product featured with convertible sensor for either right or left hand side to the alarm unit (factory preset at right hand side) to convert to left hand side.
 - Open the battery cover by sliding it down
 - Pull out the "reed switch box" to the right or battery
 - Place the "reed switch box" to the left of battery and be firmly fixed in position Fig. 2
4. Turn switch to ON position, now unit is standby to work
To replace battery when alarm sounds weak

Part No.	Product No.	Description
14939	6308	Wireless Door Alarm

Detectors Smoke Detector

Detailed product specifications are available on: us.100y.com.tw



SPECIFIC

- Operating voltage: DC 9V
- Operating temperature: -10°C~50°C
- Power consume: ≤3W
- Opposite humidity: <95%

Part No.	Product No.	Description
17253	GAS	Gas Detector

Passive Infra-red

Detailed product specifications are available on: us.100y.com.tw



AUTOMATIC 500W FLOODLIGHT WITH MOVEMENT DETECTOR

- Passive inera-red detector-senses moving heat sources such as people
- Detector activates powerful 500W halogen floodlight
- Built in light sensor-detector will only operate in darkness, avoid wasteful daytime use
- Adjustable swivel heat detector
- Wide detection angle-110° or 180°
- Adjustable detection range-up to 12-15 meter
- L. E. D daylight walk test facility weatherproof

Part No.	Product No.	Description
16035	AC-632	AUTOMATIC 500W FLOODLIGHT WITH MOVEMENT DETECTOR



- Electric source/voltage: AC 110V
- Electric consume: 1W (power off); 15W (power on)
- Environmental brightness: about 10Lux~∞ could adjust
- Environmental temperature: -15°C~40°C
- Weight: about 930g

Part No.	Product No.	Description
15091	GBB-150(JSB-150G)	Automatic 500W Floodlight With Monement Detector



T E L : Taiwan: 886-3-5753170
F A X : Taiwan: 886-3-5753172
E-mail : Taiwan: us_sale@100y.com.tw

Shenzhen: 86-755-83298787
Shenzhen: 86-755-83640655
Shenzhen : 100y@163.com

Shanghai: 86-21-54151736
Shanghai: 86-21-64605107
Shanghai : 100y-1@163.com



FIRE & SECURITY & CCTV

Passive Infra-red

Detailed product specifications are available on: us.100y.com.tw



Character Model	Input voltage	Output type	Max. load	
			Resistance load light, electrothermal wire	Inductance load motor, daylight lamp
RS-201	AC100V~ 220V	C contact	5A	3. 5A

- High induction, easy install
- SMD stability well
- Small volume, high current, long life
- Induction length: 8~10 meter
- Induction angle: 145°

Part No.	Product No.	Description
13707	HH0004	Passive Infrared detector



- Output power: max load-bulb 500W, daylight lamp: 200W
- Text length: 8 meter(max)
- Text angle: 130°
- Length switch: could adjust length

Part No.	Product No.	Description
15073	HT-5605	Passive Infra-red Switcher



Character Model	Input voltage	Output type	Max. load	
			Resistance load light, electrothermal wire	Inductance load motor, daylight lamp
RP-212	DC12V	AC/DC 12V	8A	6A
RS-201	AC110V~ 220V	C contact	5A	3. 5A
RS-212	AC/DC 12V			
S0603	AC110V~ 220V Automatic switch	AC100V ~220V Same to input voltage	AC100V/800W AC220V/1500W	AC100V/500W AC220V/900W
	AC/DC 12V Automatic switch	AC/DC 12V Same to input voltage	8A	6A

- High induction, easy install
- SMD stability well
- Small volume, high current, long life
- Induction length: 8~10 meter
- Induction angle: 145°

Part No.	Product No.	Description
15939	RP-212	Wireless PIR Motion Detcetor
15938	RS-21 2	Wireless PIR Motion Detcetor
5581	S0603	Passive Infrared Ddetector



- Induction range: 130°
- Induction distance: 10M
- Electric source: 9V quadrate battery or 9V rectifier

Part No.	Product No.	Description
8804	TK-3	DC9V: Wireless Door Alert



- Omnidirectional angle adjust, circle 360o, about 80°
- Half ball lens sense range: 100° circle
- 110V/220V community

Part No.	Product No.	Description
15093	WS-5303	Monement Detector

Doorbell Wireless Doorbell

Detailed product specifications are available on: us.100y.com.tw



FEATURE

- 16 pieces of music available every touching give you a new tune
- High power output, gentle and elegant tone
- Consume little power, battery list longer life

SPECIFICATION

- Power: DC-3V battery (2pcs~AA~size)
- Trigger diect trigger and AC 110/220V both

Part No.	Product No.	Description	Type
7606	1470	Doorbell	Music



FEATURES

Battery operated. Up to 100 foot range. Push button transmitter. Sound activated transmitter. wireless, portable, affordable, discreet, No installation. Light weight . Easy to use. Compact size

Part No.	Product No.	Description
16775	6274	Wireless Door Alert

- We provide various product for your choice and help you develop infinite commercial chance!

[Http://us.100y.com.tw/](http://us.100y.com.tw/)

Centenary Materials

Waiting for your phone call



T E L : Taiwan: 886-3-5753170
F A X : Taiwan: 886-3-5753172
E-mail : Taiwan: us_sale@100y.com.tw

Shenzhen: 86-755-83298787
Shenzhen: 86-755-83640655
Shenzhen: 100y@163.com

Shanghai: 86-21-54151736
Shanghai: 86-21-64605107
Shanghai: 100y-1@163.com



FIRE & SECURITY & CCTV

Wireless Doorbell

Detailed product specifications are available on: us.100y.com.tw



- Operating temperature: -20°C~+40°C
- Sense angle: fluctuate 90°, about 135°
- Sense distance: 5 meter (max)
- Transmit distance: 40 meter (no obstacle)

Part No.	Product No.	Description
6181	6278	Wireless Door Alert



- Battery-powered transmitter and receiver no wall outlet required
- Ideal for helping you keep children away from dangerous areas
- Useful as an office or retail store entry announcement system
- 100 foot range throughout the home office or outdoors

Part No.	Product No.	Description
16776	6478	Wireless Door Alert



- Battery-powered transmitter and receiver no wall outlet required
- Useful as an office or retail store entry announcement system

Part No.	Product No.	Description
40833	NS-2523	Doorbell

Radio Controllers

Detailed product specifications are available on: us.100y.com.tw



- The adapter of APT-X3 series can have a remote control function for the electrical appliances at home or in the office
- The installation is very easy, just plug-in the adapter in to the electricity outlets and you can control the appliances with your hand-held transmitter
- It can be linked up with the telephone and computer remote system to make a complete home automation system

SPECIFICATION

- Power: 110V+/-10V, 60Hz/220V+/-20V, 50Hz
- Load: 400, 1000 watts max
- Plug: American, Canada, Taiwan, Japan, Thailand, Hongkong, China, Brazil, Philippines etc, plugs available

Part No.	Product No.	Description
15911	APT-1300	Radio Controllers 110V 60Hz 1000W



- DC 120V-24V, set difference action
- Sense distance: 60~100 meter

Part No.	Product No.	Description
10161	VS-05	Radio Controller



- Serve voltage: DC 120V
- Relay current: VAC 110V-5A, 220V-3A, V250MHz-450MHz
- Sense distance: 30~50 meter

Part No.	Product No.	Description
6421	VS1-3	Radio Controllers Kit

Closed-Circuit TV Equipment (CCTV) System

Detailed product specifications are available on: us.100y.com.tw



FEATURES

- Full quad display at real time refresh rates
- High resolution picture
- Supports quad-switch and selection full screen functions
- No division border video gain adjustable
- User-friendly front panel design

SPECIFICATIONS

- Digital memory: 1024x512 for full screen
- Video format: EIA or CCIR-Monochrome video signal
- Dimension (LxWxH): 210x220x44mm
- Power supply: DC 12V
- Power consumption: 250mA

Part No.	Product No.	Description
15899	KBQ-401	B/W Quad Processor (Screen Splitter)

CCD Camera

Detailed product specifications are available on: us.100y.com.tw



- Electrical source: DC 12V/50mA
- Function: suitable for ceiling
- Equip: transformer/lens
- Eyeballing angle: 92°

Part No.	Product No.	Description
14580	KMS-1042BOX	CCD Camera





FIRE & SECURITY & CCTV

CCD Camera


Detailed product specifications are available on: us.100y.com.tw



SPECIFICATIONS

- Image pick-up device: 1/3" CCD image sensor (Inter line)
- Picture element: 512 (H) x 492 (V), NTSC/EIA 512 (H) x 582 (V) PAL/CCIR
- Resolution: 380 Horizontal TV lines 290000 pixels (CCIR)
- Min illumination: 0 Lux
- Illumination source: 6 IR LEDs on board
- Horiz. Sync. Frequency: NTSC/EIA 15, 734KHz, CCIR/PAL 15, 625KHz
- Vertical frequency: 60Hz CCIR PAL 50Hz
- Clock frequency: NTSC 19.0699 MHz, PAL 18, 9375MHz
- Scanning system: Interlace 2:1
- S/N Ratio: more than 46dB
- Electronic shutter: 1/100, 000sec. (Linear)
- Lens: 3.6mm, f2.0
- Video O/P: 1Vp-p, 75Ohms
- Audio O/P: 2V p-p
- Gamma: 0.45

- Storage temperature: -30 to 60°C
- Operating temperature: -10 to 45°C

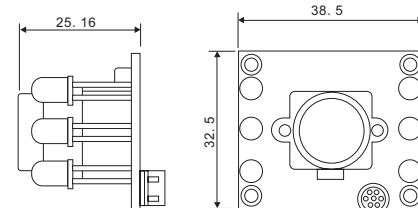

Unit: mm

Part No.	Product No.	Description
2806	15-BB26LA-1	CCD Camera (With Audio In / Night Visible)



SPECIFICATIONS

- Image pick-up device: 1/3" CCD image sensor (Inter line)
- Picture element (Medium): NTSC/EIA: 512*492, PAL/CCIR 512*582
- Picture element (High): NTSC/EIA: 771*492, PAL/CCIR 753*582
- H. Sync Frequency: NTSC/EIA: 15.734KHz, PAL/CCIR: 15.625KHz
- V. Sync Frequency: NTSC/EIA: 59.94Hz, PAL/CCIR: 50Hz
- Synchronization: Internal/DC type, Line-lock/AC type (option)
- Back light compensation: ON/OFF Switchable
- Electronic shutter: ON/OFF Switchable, range: 1/50 (1/60) ~ 1/100, 000sec
- Auto gain control: ON/OFF Switchable
- Lens: CS Mount
- Gamma correction: 0.45

- S/N Ratio: more than 48dB
- Video output: 1vp-p, 75ohms
- Dimension W*H*D mm: 97*60*60
- Power supply: 12VDC, 24/110/230VAC
- Storage temperature: -30 to 60°C
- Operating temperature: -10 to 45°C

FEATURES

- Auto white balance,
- Auto back light compensation
- Line lock available 0.2 lux without IR
- Night vision available for color camera

Part No.	Product No.	Description
16531	HTC-55G/NV	1/3" High Quality Color CCD Camera



- Image pick-up element: 1/3" Inter line transfer CCD image sensor
- Signal output: 1Up-p 75Ω (unbalanced)
- Gamma: 0.45 or 1
- Electrical source voltage: DC+12V +/- 10%
- Current consumption: 190mA

- Reserve temperature: -30°C ~ 70°C
- Operating temperature: -10°C to 45°C
- Pimention: 64.5 (L) * 43.5 (W) * 44 (H) mm
- Weight: 160g

Part No.	Product No.	Manufacturer	Description
21820	ITWC-231S	Motic	Color video camera



SPECIFICATIONS

- Image pick-up device: 1/3" CCD image sensor (Inter line)
- Picture element: 510 (H) x 492 (V)
- Min illumination: 0.2 Lux F 1.2
- Electron shutter: 1/60 ~ 1/120, 000sec
- Video O/P: 1Vp-p, 75Ohms

- Gamma: 0.45
- Operating temperature: -10°C to +50°C
- Operating humidity: 85% RH
- Power supply: DC 12V/200mA
- Dimension W*H*L mm: 46*40*102

Part No.	Product No.	Description
13322	KMS-1064KCS	1/3" B/W CCD Camera Kits



SPECIFICATIONS

- Image pick-up device: 1/3" CCD image sensor (Inter line)
- Picture element: 542 (H) x 492 (V)
- Min illumination: 0.2 Lux F 2.0
- Electron shutter: 1/60 ~ 1/120, 000sec
- Video O/P: 1Vp-p

- Operating humidity: 85% RH
- Power supply: DC 12V ± 10% 1.2W
- Dimension mm: 88 (Φ) x 60 (H)
- Weight: 100g
- Operating temperature: -20°C to +55°C

Part No.	Product No.	Description
12530	KMS-1070CS	1/3" High Quality B/W CCD Camera



SPECIFICATIONS

- Image pick-up device: 1/3" CCD image sensor (Inter line)
- Picture element: 537 (H) x 505 (V)
- Min illumination: 0.2 Lux F 1.2 5600K
- Electron shutter: 1/60 ~ 1/120, 000sec
- Video O/P: 1Vp-p, 75Ohms

- Gamma: 0.45
- Operating temperature: -20°C to +50°C
- Operating humidity: 85% RH
- Power supply: DC 12V ± 1V / 90mA
- Dimension mm: 58 (Φ) x 58 (H)

Part No.	Product No.	Description
13459	KMS-1242AXCS	1/4" Color High Quality CCD Camera



T E L : Taiwan: 886-3-5753170
F A X : Taiwan: 886-3-5753172
E-mail : Taiwan: us_sale@100y.com.tw

Shenzhen: 86-755-83298787
Shenzhen: 86-755-83640655
Shenzhen: 100y@163.com

Shanghai: 86-21-54151736
Shanghai: 86-21-64605107
Shanghai: 100y-1@163.com



FIRE & SECURITY & CCTV

CCD Camera



SPECIFICATIONS

- Image pick-up device: 1/4" CCD image sensor (Inter line)
- Picture element: 512 (H) x 492 (V)
- Min illumination: 3 Lux at (F2.0)
- Electron shutter: 1/60-1/80000sec
- Video O/P: 1Vp-p

- Gamma: 0.45
- Operating temperature: -20°C to +55°C
- Operating humidity: 85% RH
- Power supply: DC 12V/150mA
- Dimension W*H*D mm: 50.5*50.5*115

Detailed product specifications are available on: us.100y.com.tw

Part No.	Product No.	Description
11671	KMS-1280CS	1/4" Color High Quality CCD Camera (Wide-Angle)



The WAT-221S is our camera, which contains the most functions among our Watec products. The uniqueness of the WAT-221S is its ability to output a composite video signal and a Y/C output at the same time, therefore, you can choose to use one output or even both together.

	NTSC	PAL
Pick-up Element	1/2 inch interline transfer CCD image sensor	
Sensing Area	380K	440K
Minimum Illumination	0.11xFL. 2 (AGC High)	
AGC	High: 8-36dB, Low: 8-24dB, Off: 8dB	
Shutter Speed	E. 1.1 (Off-1/10, 000sec.), E. 1.2 (FL-1/10, 000sec.), FL. Off, 1/250, 1/500, 1/1,000, 1/2,000, 1/4,000, 1/10,000	
White balance	Auto, Push lock, Manual, 3200k, 4200k, 5100k, 6300k	
Power Supply	DC+10-15V	
Weight	Approx. 160g	

Part No.	Product No.	Description
24065	WATEC-221S	Color video cameral

CCD Lenses




6-15m/mF1.4
CCD Lenses(6mm-15mm)

Part No.	Product No.	Description
14304	KL-VM2X0615	CCD Lenses(6mm-15mm)



8mm/F1.8
Angle of view: 39 to 29 degrees
Image format: 1/3 or 1/4 inch
IR valid range: 23 meters

Part No.	Product No.	Description
5230	KMS-08132	8mm Manual CCD Lenses



8m/m CCD Lenses F1.8

Part No.	Product No.	Description
16849	KMS-80A	8m/m CCD Lenses F1.8



FEATURES

- All kinds of tokina lens
- Fixed Hunt board lens
- Reasonable price

ITEMS	Focal Length (mm)	Aperture (F)	Operation		Remark
			Iris	Focus	
TC0614	6.0	1.4	Manual	Manual	Tokina Brand

Part No.	Product No.	Description
16532	TC0614	6mm Manual CCD Lenses

CCTV Monitors



9" B/W Monitor(With Audio)

Part No.	Product No.	Description
33341	00-BM093A-E6B	9" B/W Monitor(With Audio)



FEATURE

- Clear & Crisp video display performance
- Ergonomics appearance design
- Microprocessor-based digital control

- NTSC/PAL dual systems Auto-switched
- Built-in front speaker with vol control
- Universal Auto-switched power supply

Part No.	Product No.	Description
19766	CH-15DXA	15" COLOR CCTV MONITOR SMART SERIES

Detailed product specifications are available on: us.100y.com.tw

● We provide various product for your choice and help you develop infinite commercial chance!

[Http://us.100y.com.tw/](http://us.100y.com.tw/)

Centenary Materials

Waiting for your phone call



T E L : Taiwan: 886-3-5753170
F A X : Taiwan: 886-3-5753172
E-mail : Taiwan: us_sale@100y.com.tw

Shenzhen: 86-755-83298787
Shenzhen: 86-755-83640655
Shenzhen: 100y@163.com

Shanghai: 86-21-54151736
Shanghai: 86-21-64605107
Shanghai: 100y-1@163.com



FIRE & SECURITY & CCTV

CCTV Monitors

Detailed product specifications are available on: us.100y.com.tw



- Resolution : 800 lines
- Input voltage: AC220V
- Power consumption: 27W
- DOS shell: black/white
- Dimension : 298 (W) x310 (W) x285 (H) mm
- Weight: 9. 6kg

Part No.	Product No.	Description
11196	FS-MT12B	12" B/W Monitor (With Audio)



5.5" B/W Monitor (No Audio)

Picture Tube	7"	5 1/2"
Power Source	DC12-28V	
Input Signal/Impedance	1. 0Vp-p/75ohm Composite video signal	
Resolution	More than 700 TV lines	
System	PAL : 625 lines 50 fields/Second	
	NTSC : 525Lines 60 fields/second	
Operating Condition	Temperature: -68°F~+131°F (-20°C~+55°C)	
	Humidity: 30%~90%RH	
Dimensions (LxWxH)	8. 03x5. 94x8. 90 inch	5. 51x5. 24x7. 24 inch
Weight (Ne/Gross)	7. 396/9. 105 lbs	4. 167/4. 85 lbs

Part No.	Product No.	Description
40661	HS-BM051	5.5" B/W Monitor (No Audio)



- Electrical source : AC96~256V, 60Hz
- Power supply : 28W
- Frequency length : 100Hz~10MHz
- Video gain : 30dB
- Linearity : Horizontal : 15% (max) , Vertical : 10% (max)

- Audio Input Signal (Optional) : 10~150mVp-p
- Audio amplifier (Optional) : 1W/8ohm
- Operating temperature : -10°C to 55°C
- Humidity : 30% to 90%RH
- Dimension : 267mmx220mmx248mm

Part No.	Product No.	Description
24644	HS-BM093-110V	9-Inch Monochrome, High Resolution Monitor(Audio Optional)
24645	HS-BM093-220V	9-Inch Monochrome, High Resolution Monitor(Audio Optional)



Suit voltage : AC96~256V, 60Hz/50Hz

Part No.	Product No.	Description
41000	HS-BM123	12" B/W Monitor (With Audio)



- Electrical source : 240V, 50Hz
- Power supply : 38W
- Frequency length : 100Hz~10MHz
- Video gain : 30dB
- Linearity : Horizontal : 15% (max) , Vertical : 10% (max)

- Audio Input Signal (Optional) : 10~150mVp-p
- Audio amplifier (Optional) : 1W/8ohm
- Operating temperature : -10°C to 55°C
- Humidity : 30% to 90%RH
- Dimension : 305mmx310mmx313mm

Part No.	Product No.	Description
27040	HS-BM151-110V	15" black and white screen



SPECIFICATION

- Resolution : Center : 500 TV lines, Corner : 400 TV lines
- Input signal : 0. 5 to 2. 0 vp-p composite video
- Input impedance : 75 ohm or higher (switch able)
- Video gain : 30dB
- Linearity : Horizontal : 10% (max) , Vertical : 10%
- Video (in/out) : BNC or F connector : Input x1/output x1
- Audio (in/out) (optional) : RCA : input x1/output x1
- Audio input signal : 1vp-p
- Power consumption : 40W
- Dimension : 262 (W) x291. 5 (D) x246 (H) mm

- Operating temperature : -10 to 50°C
- Storage temperature : -20 to 70°C

FEATURE

- Convenient front panel control
- Metal cabinet
- Video looping output
- With optional audio feature
- With carrying handles at top of cabinet
- With full range 96~256C AC power input

Part No.	Product No.	Description
28429	HS-CM105	CCTV Monitors



Beautiful color, suitable for diversified cinematograph

Part No.	Product No.	Description
41678	HS-CM145-N6B	
18806	HS-CM146H	14" Color Monitor





FIRE & SECURITY & CCTV

CCTV Monitors

Detailed product specifications are available on: us.100y.com.tw



SPECIFICATION

- Suit voltage: AC96~256V, 50Hz/60Hz
- Have seven state control type
- Power source: AC96~256V, 50Hz/60Hz
- Power consumption: 63W
- Video gain: 30dB
- Linearing: Horizontal: 10% (max), Vertical: 10%
- Audio input signal (Optional): 10~150mVp-p
- Audio amplifier (Optional): 1W/8 ohm
- Weight /gross weight: 14kg/15kg
- Dimension D*W*H: 400x362x357mm
- Operating temperature: -10°C to 55°C

Part No.	Product No.	Description
23290	HS-CM157A	15" Color Monitor



SPECIFICATION

- System: EIA or CCIR
- Scanning System: EIA: 15.750Hz±400Hz
- Input signal (Optional): composite video 0.5~2.0Vp-p (BNC)
- Output signal: 1.0Vp-p 75 ohm. loop-through (BNC)
- Resolution: 1000 lines
- Diemension W*D*H: 220x60x37mm
- Weight: N. W: 5.8Kg, G. W: 6.4Kg
- Environmental temperature: -10°C~40°C (14°F~104°F)

Part No.	Product No.	Description
14424	KA-093	9" B/W Monitir (No Audio)



SPECIFICATION

- System: NTSC or PAL
- Scanning system: NTSC: 15.750 Hz±50Hz
PAL: 15.625Hz±50Hz
- Input signal (Optional): composit video 0.5~2.0Vp-p
- Output signal: 1.0Vp-p 75 ohms, loop-throughs
- Dimension W*D*H: 260x93x252mm
- Weight N. M: 7.6Kg, G. W: 8.8Kg
- Environmental temperature: -10°C~40°C (14°F~104°F)

Part No.	Product No.	Description
2775	KA-210C	10" Color Monitor



SPECIFICATION

- System: NTSC or PAL
- Scanning system: NTSC: 15.750Hz±50Hz
PAL: 15.625Hz±50Hz
- Input signal (Optional): composit video 0.5~2.0Vp-p (BNC)
- Output signal: 1.0Vp-p 75ohms, loop-throughs (BNC)
- Dimension W*D*H: 360x387x351
- Weight N. M: 12.4Kg, G. W: 14.4Kg
- Environmental temperature: -10°C~40°C (14°F~104°F)

Part No.	Product No.	Description
13055	KA-214	14" Color Monitor (No Audio)

CCTV VCR

Detailed product specifications are available on: us.100y.com.tw



Features for safe recording

- Tap end blue screen indicator
This function informs the user that recording has stopped by providing a blue screen as soon as Auto Rewind starts when the end of a tape is reached. (ON/OFF switchable)
- Repeat recording frequency indicator

The same tape is often used repeatedly for recording with time-lapse VCRs. With the AG-RT600, the number of times a tape is used is displayed on the LCD. When a tape has been used more than 50 times, the indications flash, alerting the user to change the tape. This helps eliminate problems arising from using a worn tape.

A variety of recording functions

- Emergency recording
With the power switch off, or when the unit is set to the stop position, recording automatically starts in 8-hour mode as soon as an external alarm signal is received.

Alarm recording

When an alarm signal is received during time-lapse recording, the AG-RT600 automatically seitches to alarm recording in the 8-hour mode. Alarm search/alarm recall enables a quik search and check of alarm recordings

- Daylight saving time adjustment
- Auto alarm reset
- Daily and weekly timer recording
- External timer recording
- Auto repeat recording/Auto rewind
- 1-week timer backup
- Built-in time/date generator

Other features

- HR (High-response) Mechanism assures high reliability while offering quick response
- Auto Head cleaning
- Noiseless still and forward/reverse field advance
- On-screen display
- AG-A11 Optional wired remote control
- Dual mode record lock function
- Easy-to-read LCD with backlight and hour meter
- Camera switching output, auto off output and tape end output
- Compact cabinet, only 10 5/8" wide
- Low power consumption.
- Quasi-V insertion ON/OFF

Part No.	Product No.	Manufacturer	Description
11725	AG-RT600	Panasonic	Real Motion Time Lapse Video Cassette Recorder (NTSC)

- We provide various product for your choice and help you develop infinite commercial chance!

[Http://us.100y.com.tw/](http://us.100y.com.tw/)

Centenary Materials

Waiting for your phone call



T E L : Taiwan: 886-3-5753170
F A X : Taiwan: 886-3-5753172
E-mail : Taiwan :us_sale@100y.com.tw

Shenzhen: 86-755-83298787
Shenzhen: 86-755-83640655
Shenzhen : 100y@163.com

Shanghai: 86-21-54151736
Shanghai: 86-21-64605107
Shanghai : 100y-1@163.com



FIRE & SECURITY & CCTV

CCTV VCR



Detailed product specifications are available on: us.100y.com.tw

MODEL	CCTV-2.4Tx TRANSMITTER	CCTV-2.4Rx RECEIVER
SPEC		
Frequency	2400-2483MHz	2400-2483MHz
Output power	Fcc Regulation or NON FCC (50mw TPP)	
Power supply	DC 12V 500mA	
Video in/output	1Vp-p Composite/75Q	

MODEL	CCTV-2.4Tx TRANSMITTER	CCTV-2.4Rx RECEIVER
SPEC		
CONSUMPTION	2.5W (max)	3.6W (max)
DIMENSIONS	4"L*2 1/5"W*2"H	7 1/2"L*5 1/5"W*1 1/2"H

Part No.	Product No.	Description
14231	KTRX-2.4CR	AV2.4GHZ CCD Wireless Video cassette recorder



- This system could suitable for Windows 98SE/ME/2000/XP
- This system every cinematograph image could adjust color, bright, contrast sigle
- Every cinematograph could blow up, reduce, and have function of show chinese, english, number, sign set
- Every cinematograph video could blow up , reduce, move, and time, date note

Part No.	Product No.	Description
15431	NIMAX4P	Multi-Digital Recorder System

CCD Accessories

Detailed product specifications are available on: us.100y.com.tw



- Mini-Microphone
- Model: KA-2000
- Frequency: 20~100, 00Hz
- Electrical Source: DC 12V
- Dimension: 6x18mm

Part No.	Product No.	Description
16104	KA-2000	Mini Mircophone



All injection joints with brass screw inserted. Main body equipped with two sets of ball bearing & needle bearing to prevent disengaging, ageing & deformation

- Circumgyrate rate: 5°/sec
- Max load: 7Kg
- Operating voltage: AC 110V/AC 220V
- Power consum: 3W
- Current consum: AC 110V/20mA, AC 220V/13mA
- Operating temperature: -25°C~+60°C
- Cable contact: 4 pin fixup
- Material: ABS aluminium
- Dimension: 119 (Φ) x115 (H) mm
- Weight: 0.9Kg

Part No.	Product No.	Description
15898	KJS-180	Scanner



- 9010 ● Dimension: 101 (W) x384 (L) x110 (H) mm
- Screen dimension: 73 (W) x64 (H) mm
- Material: aluminium
- Function: water-proof, sunny-proof
- Weight: 1.5g
- 9022 ● Max load: 10Kg
- Adjust angle: Horizontal: 360° Vertical: +/-90°
- Configuration: Aluminium milk white
- Dimension: 285 (L) mm
- Weight/gross weight: 800/880g

Part No.	Product No.	Manufacturer	Description
12446	KMS-9010/KMS-9022	AON	Camera Housing & Mountion Hardware



- Horizontal angle: 360°
- Vertical: +/-110°
- Bolt dimension: 1/4"
- Max load: 3.4Kg

Part No.	Product No.	Manufacturer	Description
9854	KMS-9021LG	AON	ABS Mounting Hardware , 140*46mm, 120g

TV/Radio Accessories

Cable TV Amplifier



VCR/TV AMPLIFIER

- Easy installation
- High gain, low noise figure
- Flat frequency response
- For indoor use only
- Gain control & high over load capacity, swi-tchable fm trap to stop fm interference

Detailed product specifications are available on: us.100y.com.tw

ITEM	MODEL	426UV	426VB-20dB	ITEM	MODEL	426UV	426VB-20dB
Frequency (MHz)	VHF	55~450	55~550	INPUT RETURN LOSS (dB)	VHF	6	
	UHF	470~890			UHF	6	
GAIN (dB)	VHF	30	30	OUTPUT RETURN LOSS (dB)	VHF	8	10
	UHF	26			UHF	7	
NOISE FIGURE (dB)	VHF	6		IMPEDANCE (Ω)		75	
	UHF	6.5					
RESPONSE FLATNESS	VHF	2		NUMBER OF OUTPUT		1	
	UHF	3					
GAIN CONTROL (dB)	VHF	-10		CONNECTOR		F-61	
	UHF	-10					
SWITCHABLE 88-96MHz FM TRAP (dB)	VHF	-20		POWER SOURCE		117VAC, 60Hz, 3.6W	
	UHF	-20					
MAX. INPUT AT-60dB INTERMODULATION DISTORTION	VHF	15		DIMENSION		6 5/8"x3/12"x17/16"	
	UHF	15					

Part No.	Product No.	Description
5781	426UV-30dB	UHF/VHF/FM Amplifier -E-1103



T E L : Taiwan: 886-3-5753170
F A X : Taiwan: 886-3-5753172
E-mail : Taiwan: us_sale@100y.com.tw


Shenzhen: 86-755-83298787
Shenzhen: 86-755-83640655
Shenzhen: 100y@163.com

Shanghai: 86-21-54151736
Shanghai: 86-21-64605107
Shanghai: 100y-1@163.com



FIRE & SECURITY & CCTV

Audio/Video Selector

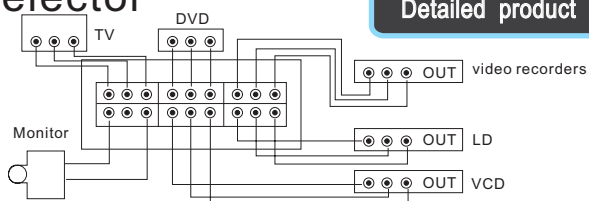

Detailed product specifications are available on: us.100y.com.tw

Yellow : video
Red, white : sound

Part No.	Product No.	Description
10507	1793	AV Audio/Video Selector



- Dimension : 126. 5x97. 6x28. 7mm
- Application : TV, VCD/DVD/LD, family cinema, cinematograph, Monitor etc
- Easy use, convenience

Part No.	Product No.	Manufacturer	Description
12752	2K1111317	LEAP	Audio/Video Selector



PHYSICAL

- Size: IMU 8.9cmx8.5cm high
PCS 19" rack mount, 2.5U 33.5cmx48.3cmx11.1cm
- Weight: IMU 0.7kg
PCS 7.7kg
- Power PCS 28VDC 100W (max) (PCS supplies IMU)
- Temp. Range: IMU -54 deg C to +85 deg C
PCS 0 deg C to +60 deg C
- Humidity: PCS 5 to 95% RH non-condensing

Part No.	Product No.	Description
7448	AV-410	AV Manual Audio/Video Selector

CATV Splitter

Detailed product specifications are available on: us.100y.com.tw



MODEL	FREQUENCY RANGE (MHz)	INSERTION LOSS (dB)	ISOLATION (dB)	RETURN LOSS IN/OUT	DIMENSION (mm)	WEIGHT (g)
2242	5-47	≤3.7		26/20dB at 40MHz -1.5dB/OCT	53x47x26	55
	48-470	≤3.7	≥2.0			
	471-862	≤4.0	≥18.5			
2243	5-47	≤6	≥16	23/20dB at 40MHz -1.5dB/OCT	74x47x26	75
	48-470	≤5.6	≥18.5			
	471-862	≤6.1	≥17			

Part No.	Product No.	Description	MHz
3545	2242	1-2 High Quality Splitter	5~860MHz
3546	2243	1-3 High Quality Splitter	5~860MHz



MODEL	FREQUENCY RANGE (MHz)	INSERTION LOSS (dB)	ISOLATION (dB)	RETURN LOSS (dB)	DIMENSION (mm)	WEIGHT (g)
2244	5-47	≤7.5	≥20.0	26dB at 40MHz -1.5dB/OCT	73x48x25	80
	48-470	≤7.5	≥18.5			
	471-862	≤8.0	≥17.0			

Part No.	Product No.	Description	MHz
14699	2244	4-WAY SPLITTER	5~862MHz



MODEL	FREQUENCY RANGE (MHz)	INSERTION LOSS (dB)	ISOLATION (dB)	RETURN LOSS (dB)	DIMENSION (mm)	WEIGHT (g)
STF-H2246P	5-40	12.5	20	3	120x60x24	152
	40-1000	12.5	20	10		
	1000-1750	15	17	8		
	1750-2050	16	16	8		
	2050-2300	18	12	7		

Part No.	Product No.	Description	MHz
14700	2246	6 Ways Splitters	5-862MHz



MODEL	FREQUENCY RANGE (MHz)	INSERTION LOSS (dB)	ISOLATION (dB)	RETURN LOSS IN/OUT	DIMENSION (mm)	WEIGHT (g)
2244	5-47	≤7.5	≥20.0	20dB at 40MHz -1.5dB/OCT	73*48*25	80
	48-470	≤7.5	≥18.5			
	471-862	≤8.0	≥17.0			
2246	5-470	≤11.0	≥20.0	20dB at 40MHz -1.5dB/OCT	123*60*37	270
	471-862	≤11.5	≥17.0			
2248	5-470	≤12.0	—	20dB at 40MHz -1.5dB/OCT	123*60*37	280
	471-862	≤12.5	≥18			

Part No.	Product No.	Description	MHz
14701	2248	8-WAY SPLITTER	5~862MHz



T E L : Taiwan: 886-3-5753170
F A X : Taiwan: 886-3-5753172
E-mail : Taiwan: us_sale@100y.com.tw

Shenzhen: 86-755-83298787
Shenzhen: 86-755-83640655
Shenzhen : 100y@163.com

Shanghai: 86-21-54151736
Shanghai: 86-21-64605107
Shanghai : 100y-1@163.com



FIRE & SECURITY & CCTV

CATV Splitter

Detailed product specifications are available on: us.100y.com.tw



1-3 Splitter

Part No.	Product No.	Description	MHz
39619	23431B	1-3 Splitter	5-1000MHz



- Zinc die-casting housing
- Built-in grounding block
- All ports F female connector, 75Ω
- Two pieces of screws attached
- Frequency range: 5~900MHz

Part No.	Product No.	Description	MHz
10558	244	1-4 High Quality Splitter	5-900MHZ




- Input: 75Ω quick F male
- Output: 300Ω
- Frequency range: 5~900MHz

Part No.	Product No.	Description
7608	320A	75Ω/300Ω Matching Transformer



- Input: 75Ωx2
- Output: 75Ω

Part No.	Product No.	Description	MHz
4181	AB-28	Scanner Cable Switch	5~900MHz



STV-1782B
STV-1784



STV-1784B



STV-1786B
STV-1788B

MODEL	FREQUENCY RANGE (MHz)	INSERTION LOSS (dB)	ISOLATION (dB)	RETURN LOSS (dB)	DIMENSION (mm)	WEIGHT (g)
STV-1782B POWER PASS TO ONE PORT	5-47	4.5	11	11	54x58x26	100
	47-1000	4.7	20	12		
	1000-1750	5.3	17	11		
	1750-2050	5.8	16	10		
	2050-2300	6.8	13	10		
STV-1784 POWER PASS TO ONE PORT	5-47	8.5	17	7	76x58x26	135
	47-1000	9	20	12		
	1000-1750	10.5	16	10		
	1750-2050	11	15	10		
	2050-2300	12	13	8		
STV-1786B POWER PASS TO ONE PORT	5-47	12	20	6	120x58x26	186
	47-1000	12	20	10		
	1000-1750	14.5	18	8		
	1750-2050	16	16	10		
	2050-2300	17.5	13	7		

- Zinc die-casting housing, nickel-plated
- All ports F female connector, 75Ω
- Power passing 24VDC 0.5A max
- Built-in two grounding block
- Two pieces of screws attached
- Particularly designed for easy and convenient installation, even thicker 9mm cable

Part No.	Product No.	Description	MHz
12569	STV-1782B	1-2 Satellite Splitter	5-2300MHZ
12570	STV-1784	Satellite Splitter 1-4	5-2050MHZ
14051	STV-1784B	CCTV Directional Tap 1-4	5-2300MHZ
14052	STV-1786B	CCTV Directional Tap 1-6	5-2300MHZ
14053	STV-1788B	CCTV Directional Tap 1-8	5-2300MHZ



STV-2244P



T2342B

Part No.	Product No.	Description	MHz
10738	STV-2244P	1 to 4 Satellite Splitter	5~2300MHz
28330	T2342B	1-2 High Quality Splitter	5~1000MHz



MODEL	FREQUENCY RANGE (MHz)	INSERTION LOSS (dB)	ISOLATION (dB)	RETURN LOSS (dB)	DIMENSION (mm)	WEIGHT (g)
STV-H2246P Power pass To all ports	5-40	12.5	20	3	120x60x24	152
	40-1000	12.5	20	10		
	1000-1750	15	17	8		
	1750-2050	16	16	8		
	2050-2300	18	12	7		

Part No.	Product No.	Description	MHz
10559	STV-H2246P	Satellite Splitter 1-6	5-862MHZ



T E L : Taiwan: 886-3-5753170
F A X : Taiwan: 886-3-5753172
E-mail : Taiwan: us_sale@100y.com.tw

Shenzhen: 86-755-83298787
Shenzhen: 86-755-83640655
Shenzhen: 100y@163.com

Shanghai: 86-21-54151736
Shanghai: 86-21-64605107
Shanghai: 100y-1@163.com



FIRE & SECURITY & CCTV

CATV Attenuators & Accessories

Detailed product specifications are available on: us.100y.com.tw



- CATV Attenuator
- Suit frequency: 5~900MHz
- 6, 10, 20Db Fixed Attenuator
- Female to male

Part No.	Product No.	Description
3563	1221B	CATV Attenuator-6db
3557	1221C	CATV Attenuator-10db
5247	1221D	CATV Attenuator-20db





Break down electric capacity: AC60

Part No.	Product No.	Description
5246	1222	CATV-Lighting Arrestor AC60V



Transducer, Buzzer And Piezo Warning Devices

Buzzers




Rated voltage (VDC)	1.5	3	6	12	24
Operating voltage (VDC)	1-2	2-4	4-8	8-16	20-28
Max. Rated current (mA)	30	40	40	40	40
Min. sound pressure level (dB)	80/20cm	85/20cm	90/20cm	90/20cm	90/20cm
Resonant frequency (Hz)	400±100				
Operating temperature (°C)	-20~+70				
Weight (g)	12				

Part No.	Product No.	Description	Type	V
3674	1463A-3V	Buzzer	Exposed	DC3V
3675	1463B-6V	Buzzer	Exposed	DC6V
4545	1464A-9V	Buzzar	Exposed	9V
3673	1464B-12V	Buzzer	Exposed	DC12V
10505	3291E	Buzzar	Exposed	24V




Rated voltage (VDC)	1.5	3	6	9	12	24
Operating voltage (VDC)	1-2	2-4	4-8	6-10	8-16	20-28
Max. Rated current (mA)	300	200	120	100	80	50
Min. sound pressure level (dB)	85/50cm	85/50cm	85/50cm	85/50cm	85/50cm	85/50cm
Resonant frequency (Hz)	400±100					
Operating temperature (°C)	-20~+80					
Weight (g)	78					

Part No.	Product No.	Description	V
8151	1465C-12V	Buzzers	12V
29076	1465C-24V	Buzzers	24V



120VAC. 70mA. 85DB/30c, single sound

Part No.	Product No.	Description	Type	V	dB
7821	1467	Buzzer	Exposed	110Vac	85db

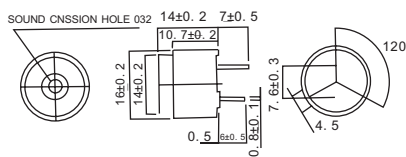

- Dimension (DiameterxDepth mm): 16x14
- Resistance Coil (DC) (Ω15%): 50
- Rated voltage (voltage): 5
- Operating voltage range (voltage): 4~7
- Current consumption at Fo, Square wave, rated V. mA (max.): 40
- SPL (db/1cm): Min. 85
- Resonant frequency (FO Hz): 2048
- Net weight (grams): 7

Part No.	Product No.	Description	Type	V	dB
3537	16SP-50	Buzzer 16 ϕ *14	50	4~7	2048



T E L : Taiwan: 886-3-5753170
F A X : Taiwan: 886-3-5753172
E-mail : Taiwan: us_sale@100y.com.tw

Shenzhen: 86-755-83298787
Shenzhen: 86-755-83640655
Shenzhen: 100y@163.com

Shanghai: 86-21-54151736
Shanghai: 86-21-64605107
Shanghai: 100y-1@163.com



FIRE & SECURITY & CCTV

Buzzers

Detailed product specifications are available on: us.100y.com.tw



#11292: (2 sound) siren+ambulance sound
#11289: (5 sound) FT: Siren+.....5 sound
105~110db/30cm (Use for alarm)


Part No.	Product No.	Description	Type	V	dB
11292	2 sound-Buzzers	Buzzar	2 sound	9~12Vdc Red+,Black -	105~110 Db
11289	5 sound-Buzzers	Buzzar	5 sound	9~12Vdc Red+,Black-	105~110db



Voltage: 24V
Current: DC




Part No.	Product No.	Manufacturer	Description	Type	V	dB
11221	TBN-24D	TEND	Exposed Type Buzzar	TBN	24V	85
22116	TBN-24VAC	TEND	Exposed Type Buzzar	TBN	24VAC	85



DESCRIPTION

Buzzer, surface mounting, voltage: 110VAC
Insulation resistance: over 100 MOhms/500 VDC,
Service life: over than 30 minutes (continue)
Volume (D. B.): over than 85 D. B.
Dielectric strength: AC 1500V for one minute




Part No.	Product No.	Description	Type	V	dB
10596	TBY-110	Buzzar	Hide	110Vac	85db
10595	TBY-24D	Buzzar	Hide	24Vdc	85db



DESCRIPTION


Buzzerm, Mounting hole: 30mm. Voltage: 110VAC.
Insulation resistance: over 100 MOhms/500 VDC
Service life: over than 30 minutes (continue)
Volume (D. B.): over than 75 D. B.
Dielectric strength: AC 1500V for one minute

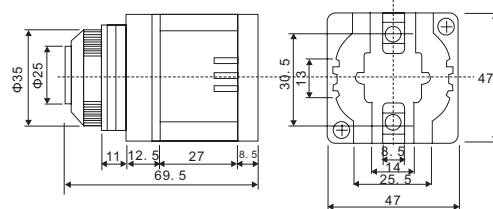

Part No.	Product No.	Description	Type	V	dB
11216	TBY-301	Buzzar	Hide	110Vac	75db
10592	TBY-302	Buzzar	Hide	220Vac	75db




Voltage: 220V 30m/m fixed aperture
Current: DC

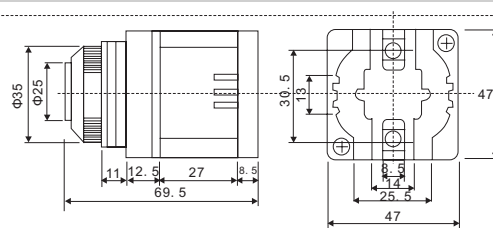

Part No.	Product No.	Manufacturer	Description	Type	V	dB
17730	TBY-3024	TEND	Buzzar	Hide	AC24V	75db
10594	TBY-3024D		Buzzar	Hide	DC24V	75db

Transducers

Detailed product specifications are available on: us.100y.com.tw

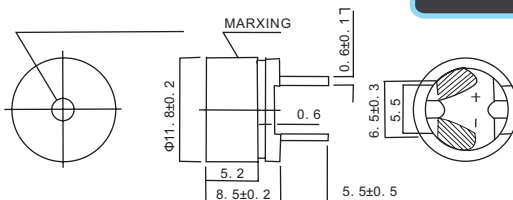

- Dimension (DiameterxDepth mm) :12x8.5
- Resistance Coil (DC) (Ω15%) : 42
- Rated voltage (voltagess) :1.5
- Operating voltage range (voltage) :1~3
- Current consumption at Fo, Square wave, rated V. mA(max.) : 30
- SPL (db/1cm) :Min . 80
- Resonant frequency (FO Hz) :2048
- Net weight (grams) :2

Part No.	Product No.	Description	V
40539	P12NP42-S	Transducer	1~2V

- We provide a wide range of products to development and maintenance engineers in all type of business
- If you cannot find the components you want on the catalogue, please call us.



Taiwan: 886-3-5753170

Shanghai: 021-54151736 Shenzhen: 0755-83298787

Centenary Materials

Waiting for your phone call



T E L : Taiwan: 886-3-5753170
F A X : Taiwan: 886-3-5753172
E-mail : Taiwan: us_sale@100y.com.tw

Shenzhen: 86-755-83298787
Shenzhen: 86-755-83640655
Shenzhen : 100y@163.com

Shanghai: 86-21-54151736
Shanghai: 86-21-64605107
Shanghai : 100y-1@163.com



FIRE & SECURITY & CCTV

Sounders Sounders - Single Tone

Detailed product specifications are available on: us.100y.com.tw




128db black ABS DOS shell
Small volum, 6-12VDC, 1. 4A load current

Part No.	Product No.	Description	Operating Volt.
16418	3325-12V	4 Inch Sounders	12V/dc



	11167	8506
Voltage	24V	110V
Current	DC	AC



Part No.	Product No.	Description	Operating Volt.
8506	4BL-110	4' Sounder 85~90db	AC110V
11167	4BL-24D	4' Sounder 85~90db	24Vdc



Color: Argent



Part No.	Product No.	Description	Operating Volt.
16695	CAB538-4	4' Sounder	110V
16696	CAB538-6	6' Sounder	110V



- Life-span: could use upwards 100 hours continuous
 - Volume: TSA: >90db TSD: >120db
- 24VDC Mini plastic siren
90+DB, Max diameter 72mm. Mounting centres 92mm

	10597	10660
Voltage	220V	24V
Current	AC	DC

Part No.	Product No.	Description	Operating Volt.
10660	TSA-24D	Sounder 90db	24Vdc



- Life-span: could use upwards 100 hours continuous
- Volume: TSC: >100db

	10598	11215	11218	14782
Voltage	24V	12V	110V	220V
Current	DC	DC	AC	AC

Part No.	Product No.	Manufacturer	Description	Operating Volt.
11218	TSC-110		Mini Sounders 100DB	110Vac
11215	TSC-12D		Mini Sounders 100DB	12Vdc
14782	TSC-220	TEND	Mini Sounders-Single Tone	220V
10598	TSC-24D		Mini Sounders under 100db	24Vdc



	11168
Voltage	24V
Current	DC

- Life-span: could use upwards 100 hours continuous
- Volume: TSD: >120db

Part No.	Product No.	Description	Operating Volt.
11168	TSD-24D	Large Sounders (under 120db)	24VDC


Weatherproof Xenon Beacons Weatherproof Xenon Beacons

Detailed product specifications are available on: us.100y.com.tw




- Voltage: DC12/24V AC110/220V
- Color: red, yellow, blue, green

Part No.	Product No.	Description	Size(B, M, S)	Voltage	Color	Diameter * H(mm)
18462	CG-30-R	Disco Flashlight	Small	110V	R	97.57*134.5
18463	CG-30-Y	Disco Flashlight	Small	110V	Y	97.57*134.5



- Voltage: DC12/24V AC110/220V
- Color: red, yellow, blue, green

Part No.	Product No.	Description	Size(B, M, S)	Color	Diameter * H(mm)
17699	CM-01L-Y	Weatherproof Xenon Beacons Shell	Small	Yellow	102*100



T E L : Taiwan: 886-3-5753170
F A X : Taiwan: 886-3-5753172
E-mail : Taiwan: us_sale@100y.com.tw

Shenzhen: 86-755-83298787
Shenzhen: 86-755-83640655
Shenzhen: 100y@163.com

Shanghai: 86-21-54151736
Shanghai: 86-21-64605107
Shanghai: 100y-1@163.com



FIRE & SECURITY & CCTV

Weatherproof Xenon Beacons

Detailed product specifications are available on: us.100y.com.tw



CM-110L-Y

CM-12L-Y

CM-220L-Y


CM-24L-Y




CM-24LBL

CM-110L-B
CM-110L-G
CM-110L-R
CM-12L-R
CM-220L-R
CM-24L-R

- Voltage: DC12/24V AC110/220V
- Color: red, yellow, blue, green




Part No.	Product No.	Description	Size(B, M, S)	Voltage	Color	Diameter * H(mm)
18439	CM-110L-B	Weatherproof Xenon Beacons	Small	110V/AC	BLUE	102*171
13068	CM-110L-G	Weatherproof Xenon Beacons	Small	110V/AC	GREEN	102*171
2868	CM-110L-R	Weatherproof Xenon Beacons	Small	110V/AC	RED	102*171
2869	CM-110L-Y	Weatherproof Xenon Beacons	Small	110V/AC	YELLOW	102*171
5773	CM-12L-R	Weatherproof Xenon Beacons	Small	12V/DC	RED	102*171
5743	CM-12L-Y	Weatherproof Xenon Beacons	Small	12V/DC	YELLOW	102*171
2871	CM-220L-R	Weatherproof Xenon Beacons	Small	220V/AC	RED	102*171
2870	CM-220L-Y	Weatherproof Xenon Beacons	Small	220V/A C	YELLOW	102*171
5772	CM-24L-R	Weatherproof Xenon Beacons	Small	24V/DC	RED	102*171
2872	CM-24L-Y	Weatherproof Xenon Beacons	Small	24V/DC	YELLOW	102*171
14775	CM-24LBL	Weatherproof Xenon Beacons	Small	24V/dc	BLUE	102*171

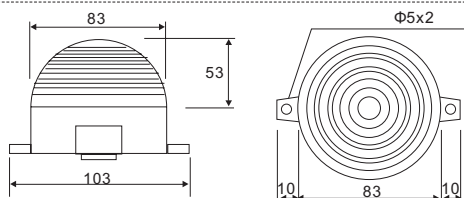

- Voltage: DC6/12/24V AC110/220V
- Color: red, yellow, blue, green, clear

Part No.	Product No.	Description	Size(B, M, S)	Voltage	Color	Diameter * H(mm)
17273	D300-110-R	Disco Flashlight	small	110Vac	Red	83.5*77mm

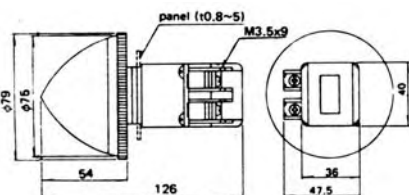


- Fixed aperture: ϕ 30m/m
- Rating voltage: 110VAC
- DOS shell: red
- Insulated resistance: 100M Ω (at 500VDC)
- Resistant voltage: 2, 000VAC 50/60 1minute

Part No.	Product No.	Description	Size(B, M, S)	Voltage	Color	Diameter * H(mm)
13163	TPLF-301-R	Disco Flashlight	Small	110/18V	Red	78*142mm




Bulb spec: 12V8W



Part No.	Product No.	Manufacturer	Description	Size(B, M, S)	Voltage	Color	Diameter * H(mm)
14781	TRM-220-R	TEND	Rolling light	Small	220V	Red	ϕ 120*137

Stacking Beacons

Detailed product specifications are available on: us.100y.com.tw



FEATURES

- Domes for the assorted colors: available in red, yellow, blue, green and transparent
- Easy to repair: only to loose a screw for replacing the lenses or bulbs
- Only installing one tower light: it can show the different signals for the production flow of machine
- Two kinds of indications: by the styles of steady-burn (LT) or flashing (LTF) .
- With elegant design: can be clearly seen the efficiency from any directions

Usage: suitable for automated plant and all kinds of automatized machines: robot, textile machines, injection molding machines, plastic extruding machines, etc.

To indicate assorted abnormal conditions in plant equipments or automatic production lines.

Suitable for game machines: pachinko etc.



Part No.	Product No.	Manufacturer	Description	Voltage
42009	S15-L57B	TEND	ϕ 50mm/ ϕ 60mm/ ϕ 70mm 用 LED bulb	24V
42012	S15-L57G	TEND	LED bulb	24V
42007	S15-L57O	TEND	LED bulb	24V
42005	S15-L57R	TEND	LED bulb	24V
42014	S15-L57W	TEND	LED bulb	24V



T E L : Taiwan: 886-3-5753170
F A X : Taiwan: 886-3-5753172
E-mail : Taiwan: us_sale@100y.com.tw

Shenzhen: 86-755-83298787
Shenzhen: 86-755-83640655
Shenzhen: 100y@163.com

Shanghai: 86-21-54151736
Shanghai: 86-21-64605107
Shanghai: 100y-1@163.com



FIRE & SECURITY & CCTV

Stacking Beacons

Detailed product specifications are available on: us.100y.com.tw




FEATURES

- Domes for the assorted colors: available in red, yellow, blue, green and transparent
- Easy to repair: only to loose a screw for replacing the lenses or bulbs
- Only installing one tower light: it can show the different signals for the production flow of machine
- Two kinds of indications: by the styles of steady-burn (LT) or flashing (LTF).
- With elegant design: can be clearly seen the efficiency from any directions

Usage: suitable for automated plant and all kinds of automatized machines: robot, textile machines, injection molding machines, plastic extruding machines, etc.

To indicate assorted abnormal conditions in plant equipments or automatic production lines.

Suitable for game machines: pachinko etc.

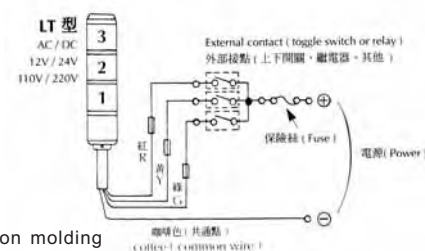

Part No.	Product No.	Description	Flash/ Spot	Voltage	Floor	Color (up? down)
36608	LT-110-RG	Tower light	Standard Pole	110V	2	Red, Green
39011	LT-110-RYGa	Tower light	Standard Pole	110V	3	Red, Yellow, Green
29295	LT-12-RYG	Tower light	Standard Pole	12V	3	Red, Yellow, Green
24075	LT-24-RBYG	Tower light	Standard Pole	24V	4	Red, Blue, Yellow, Green
29292	LT-24-RR	Tower light	Standard Pole	24V	2	Red, Red
29293	LT-24-RRR	Tower light	Standard Pole	24V	3	Red, Red, Red




FEATURES

- Domes for the assorted colors: available in red, yellow, blue, green and transparent
- Easy to repair: only to loose a screw for replacing the lenses or bulbs
- Only installing one tower light: it can show the different signals for the production flow of machine
- Two kinds of indications: by the styles of steady-burn (LT) or flashing (LTF).
- With elegant design: can be clearly seen the efficiency from any directions



Usage: suitable for automated plant and all kinds of automatized machines: robot, textile machines, injection molding machines, plastic extruding machines, etc.

To indicate assorted abnormal conditions in plant equipments or automatic production lines.

Suitable for game machines: pachinko etc.

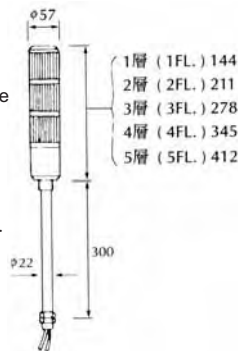


Part No.	Product No.	Description	Flash/ Spot	Voltage	Floor	Color (up? down)
11249	T24-RYGBa	Tower light	Standard pole	24V	4	Red, Yellow, Green, Blue
26829	T24-RYG Clear	Tower light	Standard pole	24V	4	Red, Yellow, Green, Clear
11169	T24-Rya	Tower light	Standard pole	24V	2	Red, Yellow




FEATURES

- Domes for the assorted colors: available in red, yellow, blue, green and transparent
- Easy to repair: only to loose a screw for replacing the lenses or bulbs
- Only installing one tower light: it can show the different signals for the production flow of machine



Part No.	Product No.	Manufacturer	Description	Flash/ Spot	Voltage	Floor	Color (up? down)
39177	TPR-302-R	TEND	Tower light	Pole Light Style	24	4	Red, Green, Red, Green
12452	TPT-113RYG		Tower light	Pole Light Style	110V	3	Red, Yellow, Green
17333	TPT-241R		Pole Light (one color)	Pole Light Style	24V	1	Red
17072	TPT-243RRR		Pole Red Light Style	Pole Light Style	24V	3	Red, Red, Red
12619	TPT-244		Tower light	Pole Light Style	24V	4	Red, Green, Red, Green
12594	TPT-244RRYGB		Pole 4 Light Style	Pole Light Style	24V	4	Red, Yellow, Green, Blue
14721	TPTF-111-Y		Flashlight Pole one color	Pole Light Style	110V	1	Yellow
41377	TPTF-220-2-RG	TEND	Beacons	Flashlight Pole	220VAC	2	Red, Green
14973	TPTF-242RG		Flashlight Pole two color	Flashlight Pole	24V	2	Red, Green
12913	TPTF5-71R		Flashlight Pole one color	Flashlight Pole	24V	1	Red
23689	TPTF5-73ROG		Pole Flashlight (3 colors)	Flashlight Pole	24V/DC	3	Red, Orange, Green
14546	TPTL-224RGYB		Flashlight Pole four color	Pole Light Style	220V	4	Red, Yellow, Green, Blue
15397	TPTL-242RG		Two color light	Pole Light Style	24V	2	Red, Green
28870	TPTL5-1-3ROG		Pole Flashlight (3 colors)	Standard Pole	110VAC	3	Red, Orange, Green
17741	TPTL5-72RR		Pole Light (2 color)	Pole light Style	24V	2	Red, Red
23936	TPTL5-73ROG		Pole Flashlight (3 colors)	Standard Pole	24VAC/DC	3	Red, Orange, Green



Layer	L
1	113
2	178
3	243
4	308
5	373





FIRE & SECURITY & CCTV

Stacking Beacons



TPW-244RYGB
TPWL-124RYGB
TPWL5-L74RBOG




TPWS5-L73ROG
TPWS6-L73ROG
TPWS7-L73ROG



TPWL-113RYG
TPWL5-73ROG



TPWL5-71R



Layer	L
1	113
2	178
3	243
4	308
5	373

Part No.	Product No.	Manufacturer	Description	Flash/ Spot	Voltage	Floor	Color (up? down)
20100	TPW-244RYGB	TEND	Spiral four color light	Pole Light Style	24V	4	Red, Yellow, Green, Blue
13587	TPWL-113RYG	TEND	Spiral red yellow green light	Spiral Pole Light Style	110V	3	Red, Yellow, Green
19798	TPWL-124RYGB	TEND	Spiral four color light	Pole Light Style	12VAC	4	Red, Yellow, Green, Blue
17197	TPWL5-71R		Spiral red yellow green light	Spiral Pole Light Style	24V	1	Red
13755	TPWL5-73ROG		Spiral red yellow green light	Spiral Pole Light Style	24V	3	Red, Yellow, Green
40773	TPWL5-L74RBOG		Spiral red yellow green light	Spiral	24V	4	Red, Blue, Orange, Green
40943	TPWS5-L73ROG	TEND	Spiral red orange green flashlight	Spiral flashlight Style	24V	3	Red, Orange, Green
31997	TPWS6-L73ROG	TEND	Spiral red orange green flashlight	Spiral flashlight Style	24V	3	Red, Orange, Green
30250	TPWS7-L73ROG	TEND	Spiral red orange green flashlight	Spiral flashlight Style	24V	3	Red, Orange, Green



Part No.	Product No.
29296	046-LT

Hearing Protection Ear Defenders



- Slim, durable plastic ear cups
- Soft foam-filled cushions stay soft after extensive use
- Contoured ear cushions to enhance fit
- Unique molded inserts provide large inner space for the ear
- Wide padded headband for secure fit and comfort
- Two-point mounting headband for low, evenly distributed pressure and easy handling
- Unique tension adjustment system for exceptional individual fit and comfort
- Light weight (8 ounces)
- Replacement cushion and inserts available (Replacement parts kit 1442)



Part No.	Product No.	Manufacturer	Description
14300	1440	3M	3M Standard Hearing Protection -NRR 24DB



MATERIAL

Kopper: ABS
Absorbent: polyurethane
Vulster: PVC



Part No.	Product No.	Manufacturer	Description
21995	3M-1435	3M	Ear Defender



- Black POM adjustable head band
- Yellow ABS cup and ear cushion of black soft PVC leather

Part No.	Product No.	Description
16012	747418994650	Standard Hearing Protection
11897	S39-106	Earplugs

Earplugs



Material: special PVC Noncombustible indrink
You can wash



Part No.	Product No.	Manufacturer	Description
2481	310-1001	Aearo	Earplugs in Pillow Pack

- We provide various product for your choice and help you develop infinite commercial chance!

[Http://us.100y.com.tw/](http://us.100y.com.tw/)

Centenary Materials

Waiting for your phone call



T E L : Taiwan: 886-3-5753170
F A X : Taiwan: 886-3-5753172
E-mail : Taiwan: us_sale@100y.com.tw

Shenzhen: 86-755-83298787
Shenzhen: 86-755-83640655
Shenzhen: 100y@163.com

Shanghai: 86-21-54151736
Shanghai: 86-21-64605107
Shanghai: 100y-1@163.com



FIRE & SECURITY & CCTV

Earplugs

Detailed product specifications are available on: us.100y.com.tw



311-1101

Easy to use Cylinder shape, soft, low pressure foam for all-day comfort, Non-allergenic, moisture resistant and Non-flammable, yellow for high visibility
Insta-seal design



Part No.	Product No.	Manufacturer	Description
5420	311-1101	Aearo	Earplugs with Cord in Poly Bag



- Eliminate the fear of hand-to-ear contamination
- Soft flexible grips for easy insertion and removal
- Slow recovery foam inserts easily, seats and stays in place
- Designed for excellent attenuation on the job



Part No.	Product No.	Manufacturer	Description
2127	311-1115	Aearo	Earplugs with Assorted Color Grips & Cord



- Self-adjusting foam provides low pressure with excellent attenuation
- The yellow color is your assurance of proven protection
- Soft and smoothest earplugs available today



Part No.	Product No.	Manufacturer	Description
2254	312-1221	Aearo	Earplugs in Poly Bag



- Self-adjusting foam provides low pressure with excellent attenuation
- The yellow color is your assurance of proven protection
- Soft and smoothest earplugs available today
- Dermatologically safe foam is non-irritating to the skin



Part No.	Product No.	Manufacturer	Description
2187	312-1224	Aearo	E.A.R. TaperFit Corded in Polybag



- Laboratory tested NRR 20dB Class BL
- Conically shaped pods made of silicon swivel for easy alignment and entry into ear
- Worn under chin, it will not interfere with hard hat or glasses
- Band for placing around neck helps prevent loss and is ideal for intermittent use
- Replacement pods (included) reduce costs



Part No.	Product No.	Manufacturer	Description
8538	320-2001	Aearo	Model 600 Hearing Protector



340-4001

Improve the comfort

What's equally impressive is that the new design feels even better in the ear.

The curved flanges gently "hug" the ear canal to provide an effective seal against noise that remains comfortable all day long.



340-4002



340-4003



340-4004



Part No.	Product No.	Manufacturer	Description
40717	340-4001	Aearo	Earplugs with Carrying Case
8537	340-4002	Aearo	Earplugs with Cord & Carrying Case
2713	340-4003	Aearo	UltraFit in Polybag
8536	340-4004	Aearo	Earplugs with Cord

Eye Protection

Detailed product specifications are available on: us.100y.com.tw



433.113



433.118

- Over the glasses, fits over most prescription frames
- Duralite polycarbonate lenses absorb 99.9% of UV rays
- Exceeds ANSI Z87.1 and CSA Z94.3 Standards

Part No.	Product No.	Description
12219	433.113	Eye Protection
12218	433.118	Anti-Fog Eye Protection



Material: Polycarbonate, Prevent ultraviolet radiation

Part No.	Product No.	Description
15485	959G	Eye Protection



T E L : Taiwan: 886-3-5753170
F A X : Taiwan: 886-3-5753172
E-mail: Taiwan: us_sale@100y.com.tw

Shenzhen: 86-755-83298787
Shenzhen: 86-755-83640655
Shenzhen: 100y@163.com

Shanghai: 86-21-54151736
Shanghai: 86-21-64605107
Shanghai: 100y-1@163.com



FIRE & SECURITY & CCTV

Eye Protection

Detailed product specifications are available on: us.100y.com.tw



- Material of optical acrylic can protect your eyes compi
- Popolor, beautiful, airy, no lasy to break
- Many colors for your choice of working orsport

Part No.	Product No.	Description
14794	KG1	Eye Protection



- Avoid acid alkali
- Check out CNS

Part No.	Product No.	Description
21987	SA-014	Avoid acid alkali Eye Protection



FEATURES

- Made of poly-carbonate
- With hanging hole
- Anti slip designed
- Always wear safety classes when using tool

Part No.	Product No.	Description
21986	SA-200	Eye Protection

Maintenance Free Respirators Fold Flat Respirators

Detailed product specifications are available on: us.100y.com.tw



3000



3200+3011-100



3011K-100

Designed for simplicity and ease of use while providing greater worker comfort

3M

Part No.	Product No.	Manufacturer	Description
13300	3000	3M	Gas Mask + Filter
16833	3011K-100	3M	Filter
16832	3200+3011-100	3M	Gas Mask + Filter



8210 N95

It has been certifiend by NIOSH as being at least 95% efficient at removing solid and liquid particles (excluding those containing oil). The 8210 is designed to provide quality, reliable worker protection in applications such as grinding, sanding, sawing, sweeping and bagging.

- Advanced electret media
- 20 ea/box

3M

Part No.	Product No.	Manufacturer	Description
21988	3M-8210	3M	N95_Fold Flat Respirator



8247 R95

It with 3M recommended nuisance level orgnic vapor relief, For use in applications such as foundries, undercoating, petrochemical operations and agricultural situations where particles are present with concentration of organic vaports below the OSHA PEL. The respirator filter is NIOSH certified to provide at least 95% efficiency against solid and liquid particles, including oils. Time use restrictions may apply.

- Advanced electret media
- Odor-removing filter material
- 20 ea/box

3M

Part No.	Product No.	Manufacturer	Description
21990	3M-8247	3M	Fold Flat Respirator



- Filtrate germ rate: >98% no peculiar smell
- Used in: home gardening, hospitals, etc

Part No.	Product No.	Description
14870	4710836420281	Maintenance Free Respirators



Used in: home gardening, hospitals, foodfactory, medical factory etc

Part No.	Product No.	Description
29409	D5800510040	DUPONT Sontara_removable respirator

- We provide various product for your choice and help you develop infinite commercial chance!

[Http://us.100y.com.tw/](http://us.100y.com.tw/)

Centenary Materials

Waiting for your phone call



T E L : Taiwan: 886-3-5753170
F A X : Taiwan: 886-3-5753172
E-mail : Taiwan: us_sale@100y.com.tw

Shenzhen: 86-755-83298787
Shenzhen: 86-755-83640655
Shenzhen: 100y@163.com

Shanghai: 86-21-54151736
Shanghai: 86-21-64605107
Shanghai: 100y-1@163.com



FIRE & SECURITY & CCTV

Fold Flat Respirators

Detailed product specifications are available on: us.100y.com.tw



D581053246



D5810550C

- Insulate dust, germ; waterproof, comfortable and ventilate
- High efficiency filtrate effect
- Easy to wear and comfortable
- Good tenacity, not easy avulsion although in the rain
- Very safety

Part No.	Product No.	Description
6795	D581053246	DUPONT Sontara_Maintenance Free Respirators
31174	D5810550C	DUPONT Sontara_Maintenance Free Respirators



D582053246



D5820550C



D5850550C

- High efficiency filtrate effect
- Easy to wear and comfortable , Very safety
- Used in : foodfactory, milkfactory, woodfactory, medical producement, etc

Part No.	Product No.	Description
6696	D582053246	DUPONT Sontara Maintenance Free Respirators
31173	D5820550C	DUPONT Sontara Maintenance Free Respirators
29404	D5850550C	DUPONT Sontara_Maintenance Free Respirators



- Easy to wear
- To remove nuisance level of organic vapours and low vapour pressure agricultural chemicals.
- Used in : Agricultural spraying, hospitals, petrochemical plants, lab, etc

Part No.	Product No.	Description
26542	K3A	5520 flat activated carbon Respirators



Used in : foundries, petrochemical plants, lab, hospital, etc

Part No.	Product No.	Description
16900	K3G	3000B Maintenance Free Respirators



Lightweight-easy to wear
Clear vision-easy to wear with gasses or safety goggles
Maintenance free-nothing to clean. no expensive maintenance
Good communication-normal voice tones can be easily understood without removing your respirator
Carbon loaded web to remove nuisance levels of organic vapours and low vapour pressure agricultural chemicals

APPLICATIONS CAN INCLUDE USE IN:

- Foundries
- Printing
- Agricultural spraying
- Hospitals
- Petrochemical plants
- Tobacco processing
- Home gardening
- Food processing

Where relief is required from low level organic vapours



Part No.	Product No.	Manufacturer	Description
8108	K3M	3M	3M "9913" Maintenance Free Respirators



SA-301R



SA-305R

Carbon loaded web to remove nuisance levels of organic vapours and low vapour press agricultural chemicals

Part No.	Product No.	Description
21996	SA-301R	Dustproof Respirators
21997	SA-305R	Dustproof activated carbon Respirators

Mittens

Detailed product specifications are available on: us.100y.com.tw



- Material : NEOPRENE
- Dimension : length : 41cm deep : 0.75mm

Part No.	Product No.	Description
21992	MA-450	Prevent acid & alkali mittens



SA-137-L



SS-104/4H-8

SA-137-L

Charactor: Prevent acid & alkali mittens

SS-104/4H-8

SS-104/4H-9

Charactor: Prevent acid & alkali mittens
Resist 200 chemical

Part No.	Product No.	Description
40447	SA-137-L	Synthetic Powder Free Exam Gloves
21994	SS-104/4H-8	Argent Gloves
27738	SS-104/4H-9	Argent Gloves



T E L : Taiwan: 886-3-5753170
 F A X : Taiwan: 886-3-5753172
 E-mail : Taiwan: us_sale@100y.com.tw

Shenzhen: 86-755-83298787
 Shenzhen: 86-755-83640655
 Shenzhen : 100y@163.com

Shanghai: 86-21-54151736
 Shanghai: 86-21-64605107
 Shanghai : 100y-1@163.com