
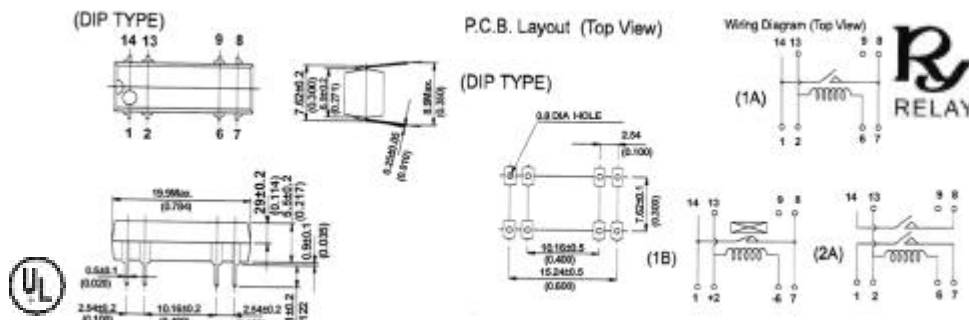


RELAYS & SOLENOIDS

磁簧繼電器

DIP PCB 磁簧繼電器



DIPPCBReedRelays

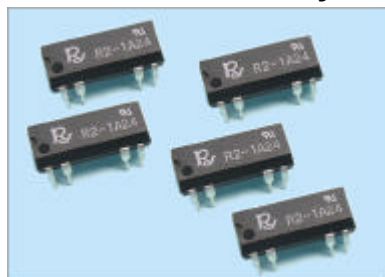

PartNo.	ProductNo.	Manuf.	Description	接點形態	Carrycurrent(A)	CoilVolt.	安規	LxWxH(mm)
10347	R2-1A05	RAYEX	DIP 磁簧繼電器 COIL:05Vdc	1PST-NO	1A	5Vdc	UL	19.9*7.62*5.5
10348	R2-1A12	RAYEX	DIP 磁簧繼電器 COIL:12Vdc	1PST-NO	1A	12Vdc	UL	19.9*7.62*5.5
10571	R2-1A24	RAYEX	DIP 磁簧繼電器 COIL:24Vdc	1PST-NO	1A	24Vdc	UL	19.9*7.62*5.5
13362	R2-2A05	RAYEX	DIP 磁簧繼電器 COIL:5Vdc	2PST-NO	0.5A/1A	5VDC	UL	19.9*7.62*5.5
13363	R2-2A12	RAYEX	DIP 磁簧繼電器 COIL:12Vdc	2PST-NO	0.5A/1A	12VDC	UL	19.9*7.62*5.5
13364	R2-2A24	RAYEX	DIP 磁簧繼電器 COIL:24Vdc	2PST-NO	0.5A/1A	24VDC	UL	19.9*7.62*5.5
11114	R2-1B05	RAYEX	DIP 磁簧繼電器 COIL:5Vdc	1PST-NC	1A	5VDC	UL	19.9*7.62*5.5
11116	R2-1B12	RAYEX	DIP 磁簧繼電器 COIL:12Vdc	1PST-NC	1A	12VDC	UL	19.9*7.62*5.5
11117	R2-1B24	RAYEX	DIP 磁簧繼電器 COIL:24Vdc	1PST-NC	1A	24VDC	UL	19.9*7.62*5.5
17706	D31A3110	celduc	DIP 磁簧繼電器 COIL:5Vdc	1N0	0.5A	5VDC		19.1*6.6*6.4
17708	D31A5110	celduc	DIP 磁簧繼電器 COIL:12Vdc	1N0	0.5A	12VDC		19.1*6.6*6.4
17709	D31A7110	celduc	DIP 磁簧繼電器 COIL:24Vdc	1N0	0.5A	24VDC		19.1*6.6*6.4
17710	D31C2110	celduc	DIP 磁簧繼電器 COIL:5Vdc	Change-over switch	0.25A	5VDC		19.1*6.6*6.4
17711	D31C5110	celduc	DIP 磁簧繼電器 COIL:12Vdc	Change-over switch	0.25A	12VDC		19.1*6.6*6.4
17712	D32A2110	celduc	DIP 磁簧繼電器 COIL:5Vdc	2NO	0.5A	5VDC		19.1*6.6*6.4

SILPCB 磁簧繼電器



SILPCBReedRelays

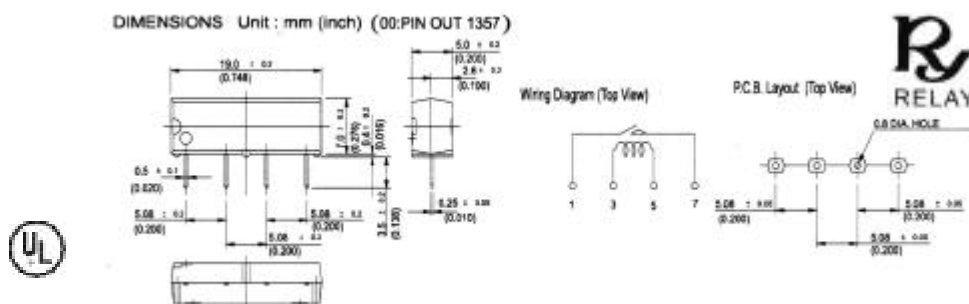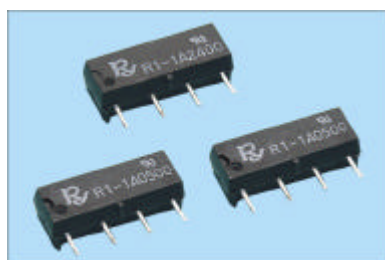

PartNo.	ProductNo.	Manuf.	Description	接點形態	Carrycurrent(A)	CoilVolt.	安規	LxWxH(mm)
17718	D41A3110L	celduc	SIL 磁簧繼電器 1PST-NO COIL:5Vdc	1NO	0.5A	5Vdc		19*5*7.5
10344	R1-1A0500	RAYEX	SIL 磁簧繼電器 1PST-NO	1PST-NO	1A	5Vdc	UL	19*7*5
10345	R1-1A1200	RAYEX	SIL 磁簧繼電器 1PST-NO COIL:12Vdc	1PST-NO	1A	12Vdc	UL	19*7*5
10346	R1-1A2400	RAYEX	SIL 磁簧繼電器 1PST-NO COIL:24Vdc	1PST-NO	1A	24Vdc	UL	19*7*5
16901	R1-1A2450	RAYEX	SIL 磁簧繼電器 1PST-NO COIL:24Vdc	1PST-NO	1A	24Vdc	UL	19*7*5



磁控玻璃管捲軸開關

ReedSwitches

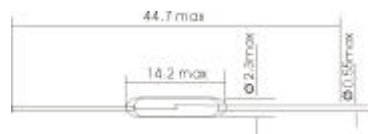

詳細產品規格--請點擊www.100y.com.tw

RELAYS & SOLENIIDS

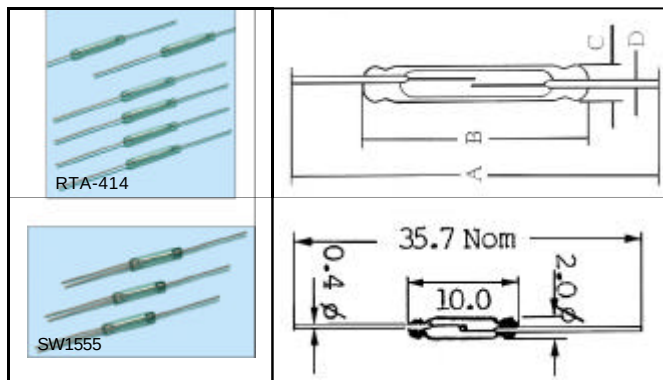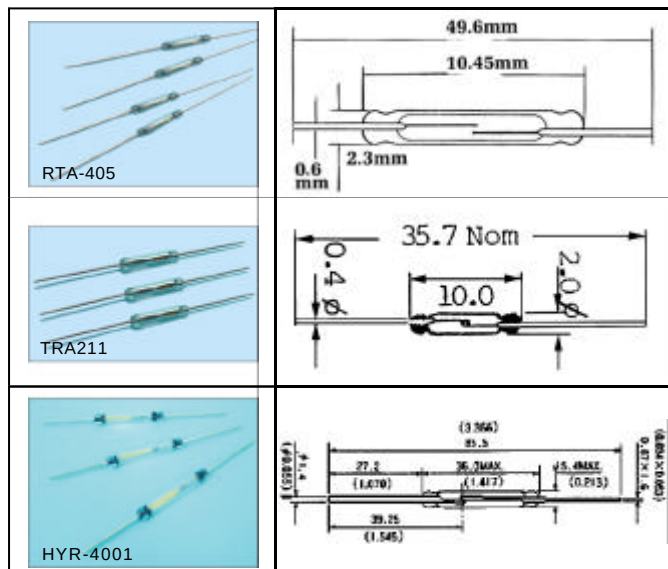

詳細產品規格--請點擊www.100y.com.tw

PartNo.	ProductNo.	Description	Max.switched cur.	Contactres.	Lengthglass	Max.switchedVolt.
17199	HYR-4003	磁簧開關Single pole,double throw	0.5A	75mΩ	15.5mm	250VDC
2892	MKA-14103	磁簧開關 10-15AT Reed Switch	0.5A	115mΩ	13.8mm	50Vac/100Vdc
11608	RTA-405	磁簧開關 AT15-20	0.5A	150mΩ(max.)	10.45mm	100V
6844	RTA-414	磁簧開關	0.5A	150mΩ(max.)	14.2mm	100V
25982	SW1555	磁簧開關AT10-15	0.25A	200mΩ	15.5mm	28V
3182	TRA211	磁簧開關AT10-15	0.1A	200mΩ	10.0mm	24V
25983	HYR-4001	磁簧開關AT50-55	0.25A	200mΩ	15.5mm	28V

小型PCB繼電器 RAYEX-PCB繼電器 "RAYEX"Relays




FEATURES:

- Open-frameandplasticsealedtypes
- EuropeanandUSAfootprintsareavailableto meetinternationalstandards
- 1A(1PST)and1C(1PDT)contactarrangement
- Usingatautomotive,industrial,Domestic appliances,heavyloads,etc.control

GENERALDATA:

InsulationResistance:100MΩmin.(DC500V)
DielectricStrength:500VAC,50/60Hzbetweencontact.
1,000VAC,50/60Hzbetweenallelements.
ContactMaterial:Silver-CadmiumOxideasstandard.
ContactResistance100milliohmsmax.(initialvalue)
ShockResistance:Malfunction:10G(11ms);Destructive:100G(6ms)
VibrationResistance: Malfunction:10to55Hz.atDoubleAmplitudeof1.5mm

Destructive:10to55Hz.atDoubleAmplitudeof1.5mm
OperationTime:10msmax.
ReleaseTime:5msmax.
TemperatureRange:-30℃~+80℃
ExpectedLife:Withoperationrate30/min.
Mechanical-10,000,000operationsmin.
Electrical-100,000operationsmin.
Atratedload.
Weight: 17grams



PartNo.	ProductNo.	Manuf.	Description	ContactArrangement	ContactRating	CoilVoltage	OutlineL x W x H
18371	LA-12FW	RAYEX	Automotive Relay LA	1PST/IPDT	DC12V 40A	12V	26*21.5*20mm
14421	LA-24F	RAYEX	Automotive Relay LA	1PST/IPDT	DC14V 40A	24V	23*18.5*17mm
14422	LA-24FW	RAYEX	Automotive Relay LA	1PST/IPDT	DC14V 40A	24V	26*21.5*20mm
14423	LA2A-12FW	RAYEX	Automotive Relay LA2	1PST-DM	DC14V 40A	12V	26*21.5*20mm
14451	LA2A-24FW	RAYEX	Automotive Relay LA2	1PST-DM	DC14V 40A	24V	26*21.5*20mm




Specifications/SpecialFeatures:

- Size (LxWxH):21.5x16x17mm
- Contactarrangement:1PST,1PDT
- Contactrating(resistiveload):120VAC/10A, 24VDC/10A 240VAC/6A
- Coilvoltage:5VDC,6VDC,9VDC,12VDC,24VDC
- Coilpower(nominal):0.36W(DC)
- Breakdownvoltage:Betweencontacts:750VAC Betweenallelements:1500VAC
- Insulationresistance:500VDC,100Mohms
- Life(min.operation):Mechanical:10⁵ Electrical(atratedload):10⁵
- Approximateweight:12g

Safety/QualityApprovals:

- TUV
- UL
- CUL



PartNo.	ProductNo.	Description	ContactArrangement	ContactRating	CoilVoltage	RecognizedSafety	OutlineLxWxH
8192	LE-12TW	繼電器 12Vdc LE	1PDT	120Vac24Vdc/10A	12Vdc	UL,TUV	21.5*16*17
4469	LE-24TW	繼電器 COIL: 24Vdc LE	1PDT	120Vac24Vdc/10A	24Vdc	UL,TUV	21.5*16*17



RELAYS & SOLENIIDS

PartNo.	ProductNo.	Description	ContactArrangement	ContactRating	CoilVoltage	RecognizedSafety	QutlineLxWxH
13442	LE-48TW	繼電器LE-48TW LE	1PST/1PDT	DC24V/10A	48Vdc	TUV,UL,CUL	21.5*16*17
2906	LE-5TW	繼電器COIL5VdcLE	1PDT	120Vac24Vdc/10A	5Vdc	UL,TUV	21.5*16*16.5
4467	LE-6TW	繼電器COIL: 6VdcLE	1PDT	120Vac24Vdc/10A	6Vdc	UL,TUV	21.5*16*16.5
4468	LE-9TW	繼電器COIL: 9VdcLE	1PDT	120Vac24Vdc/10A	9Vdc	UL,TUV	21.5*16*16.5




Specifications/SpecialFeatures:

- Size(LxWxH):19.5x15.8x15mm
- Contactarrangement:1PDT
- Contactrating(resistiveload):120VAC/10A, 24VDC/10A240VAC/10A
- Coilvoltage:3VDC、5VDC、12VDC、24VDC
- Coilpower(nominal):0.36W(DC)
- Breakdownvoltage:Betweencontacts:750VAC Betweenallelements:1500VAC
- Insulationresistance:500VDC,100Mohms
- Life(min.operation):Mechanical:10⁷ Electrical(atratedload):10⁵
- Approximateweight:9g

Safety/QualityApprovals:

- TUV
- UL
- CUL

RELAY



PartNo.	ProductNo.	Manuf.	Description	ContactArrangement	ContactRating	CoilVoltage	RecognizedSafety	QutlineLxWxH
8193	LEG-12T	RAYEX	PCB繼電器LEG	1PDT	120VAC/24VDC/10A	12Vdc	UL,TUV	19.5*15.8*15
2294	LEG-24T	RAYEX	PCB繼電器LEG	1PDT	120VAC/24VDC/10A	24Vdc	UL,TUV	19.5*15.8*15
10355	LEG-3T	RAYEX	PCB繼電器LEG	1PDT	120VAC/24VDC/10A	3Vdc	UL,TUV	19.5*15.8*15
3604	LEG-5T	RAYEX	PCB繼電器LEG	1PDT	120VAC/24VDC/10A	5Vdc	UL,TUV	19.5*15.8*15




Specifications/SpecialFeatures:

- Size(LxWxH):29x12.5x25.5mm
- Contactarrangement:1PST,1PDT
- Contactrating(resistiveload):250VAC/10A, 30VDC/10A
- Coilvoltage:5VDC,12VDC,24VDC
- Coilpower(nominal):0.53W(DC)
- Breakdownvoltage:Betweencontacts:1000VAC Betweenallelements:5000VAC
- Insulationresistance:500VDC,100Mohms
- Life(min.operation):Mechanical:10⁷ Electrical(atratedload):10⁵
- Approximateweight:16g

SafetyStandardApproval

- UL,CUL

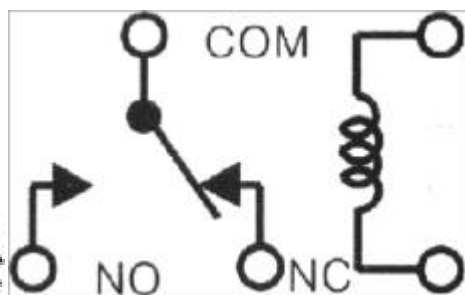

PartNo.	ProductNo.	Manuf.	Description	ContactArrangement	ContactRating	CoilVoltage	RecognizedSafety	QutlineLxWxH
2276	LM1-12D	RAYEX	PCB 功率繼電器LM1	1PDT	10A 240Vac/10A 30Vdc	12Vdc	UL,CUL	29*12.5*25.5
2277	LM1-24D	RAYEX	PCB 功率繼電器LM1	1PDT	10A 240Vac/10A 30Vdc	24Vdc	UL,CUL	29*12.5*25.5
2902	LM1-5D	RAYEX	PCB 功率繼電器LM1	1PDT	10A 240Vac/10A 30Vdc	5Vdc	UL,CUL	29*12.5*25.5




Specifications/SpecialFeatures:

- Size(LxWxH):29.4x12.5x25.5mm
- Contactarrangement:2PST,2PDT
- Contactrating(resistiveload):250VAC/5A, 30VDC/5A
- Coilvoltage:5VDC,12VDC,24VDC,48VDC
- Coilpower(nominal):0.53W(DC)
- Breakdownvoltage:Betweencontacts:1000VAC Betweenallelements:5000VAC
- Insulationresistance:500VDC,100Mohms
- Life(min.operation):Mechanical:10⁷ Electrical(atratedload):10⁵
- Approximateweight:17g

Safety/QualityApprovals:

- TUV
- UL
- CUL

RELAY

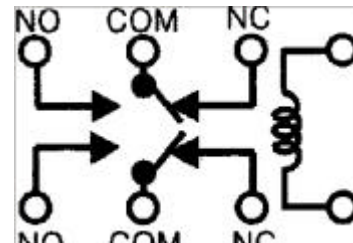

PartNo.	ProductNo.	Manuf.	Description	ContactArrangement	ContactRating	CoilVoltage	RecognizedSafety	QutlineLxWxH
2903	LM2-05D	RAYEX	PCB功率繼電器LM2	2PDT	5A 250Vac/ 10A 30Vdc	5Vdc	UL,CUL	29*12.5*25.5
2272	LM2-12D	RAYEX	PCB功率繼電器LM2	2PDT	5A 240Vac/ 5A30Vdc	12Vdc	UL,CUL	29*12.5*25.5
2273	LM2-24D	RAYEX	PCB功率繼電器LM2	2PDT	5A 240Vac/ 5A30Vdc	24Vdc	UL,CUL	29*12.5*25.5
3376	LM2-48D	RAYEX	PCB功率繼電器LM2	2PDT	5A 240Vac/ 5A30Vdc	48Vdc	UL,CUL	29*12.5*25.5




Specifications/SpecialFeatures:

- Size(LxWxH):21.8x16.8x14.2mm
- Contactarrangement:1PDT
- Contactrating(resistiveload):120VAC/10A, 24VDC/10A240VAC/6A
- Coilvoltage:12VDC、24VDC、48VDC
- Coilpower(nominal):0.36W(DC)、0.45W(DC)
- Breakdownvoltage:Betweencontacts:750VAC Betweenallelements:1,500VAC
- Insulationresistance:500VDC,100Mohms
- Life(min.operation):Mechanical:10⁷ Electrical(atratedload):10⁵
- Approximateweight:10g

Safety/QualityApprovals:

- TUV
- UL
- CUL

RELAY



PartNo.	ProductNo.	Manuf.	Description	ContactArrangement	ContactRating	CoilVoltage	RecognizedSafety	QutlineLxWxH
2268	LT-12G	RAYEX	PCB繼電器LT	1PDT	10A 120Vac/ 10A 24Vdc	12Vdc	TUV	21.8*16.8*14.2
11646	LT-24G	RAYEX	PCB繼電器LT	1PDT	10A 120Vac/5A240Vdc	24Vdc	TUV	21.8*16.8*14.2



勝特力科技有限公司

- 服務專線:886-3-5753170
- 24小時傳真:886-3-5753172
- E-mail:e100y.sale@msa.hinet.net

WWW.100Y.COM.TW

深圳百年電子有限公司

- 服務專線:86-755-83289224
- 24小時傳真:86-755-83640655
- Email:100y@163.com


29-03

RELAYS & SOLENIIDS



Specifications/SpecialFeatures:
 ● Size (LxWxH): 15.5x10.5x11.5mm
 ● Contact arrangement: 1PDT
 ● Contact rating (resistive load): 120VAC/1A, 24VDC/2A
 ● Coil voltage: 5VDC, 12VDC
 ● Coil power (nominal): 0.2W(DC)
 ● Breakdown voltage: Between contacts: 500VAC
 Between elements: 500VAC
 ● Life (min. operation): Mechanical: 10⁷
 Electrical (at rated load): 10⁵

● Insulation resistance: 500VDC, 100Mohms
 ● Approximate weight: 3g
Safety/Quality Approvals:
 ● TUV
 UL
 CUL




PartNo.	ProductNo.	Manuf.	Description	ContactArrangement	ContactRating	CoilVoltage	RecognizedSafety	OutlineLxWxH
7682	LUZ-12	RAYEX	PCB 繼電器 LUZ	1PDT	120Vac/1A 24Vdc/2A	12Vdc	UL, CUL	15.5*10.5*11.2
2274	LUZ-5	RAYEX	PCB 繼電器 LUZ	1PDT	120Vac/1A 24Vdc/2A	5Vdc	UL	15.5*10.5*11.2



Specifications/SpecialFeatures:
 ● Size (LxWxH): 15.5x10.5x11.5mm
 ● Contact arrangement: 1PDT
 ● Contact rating (resistive load): 120VAC/1A, 24VDC/2A
 ● Coil voltage: 3VDC, 5VDC, 12VDC, 24VDC
 ● Coil power (nominal): 0.2W(DC)
 ● Breakdown voltage: Between contacts: 500VAC
 Between elements: 500VAC
 ● Insulation resistance: 500VDC, 100Mohms
 ● Life (min. operation): Mechanical: 10⁷
 Electrical (at rated load): 10⁵
 ● Approximate weight: 3g

Safety/Quality Approvals:
 ● TUV, UL, CUL




PartNo.	ProductNo.	Manuf.	Description	ContactArrangement	ContactRating	CoilVoltage	RecognizedSafety	OutlineLxWxH
5148	LU-12	RAYEX	PCB 繼電器 LU	1PDT	120Vac/1A 24Vdc/2A	12Vdc	UL, CUL	15.5*10.5*11.2
2269	LU-24	RAYEX	PCB 繼電器 LU	1PDT	120Vac/1A, 24Vdc/2A	24Vdc	UL	15.5*10.5*11.2
3603	LU-3	RAYEX	PCB 繼電器 LU	1PDT	120Vac/1A, 24Vdc/2A	3Vdc	UL	15.5*10.5*11.2
3602	LU-5	RAYEX	PCB 繼電器 LU	1PDT	120Vac/1A, 24Vdc/2A	5Vdc	UL	15.5*10.5*11.2



COIL
 Pull-in Voltage: 85% of nominal voltage or less
 Drop Out Voltage: 10% of nominal voltage or more
 Max. Voltage: 110% of nominal voltage
 Resistance: ±10% measured @ 25°C
 Coil Power: See chart
 Duty: Continuous
CONTACTS
 Contact Material: Rhodium


Contact Resistance: 200 milliohms max.
 Contact Rating: 0.5 amp 100VDC (10VA)
 1.5 amps max. Continuous carry current.
TIMING
 Operate time: -40°C to +85°C @ rated operation
 Reset time: -40°C to +105 °C
SHOCK RESISTANCE
 Operating: 50g's



PartNo.	ProductNo.	Description	ContactRating	Type	OutlineLxWxH
20837	W107DIP	DUAL IN- LINE PACKAGE REED RELAY	0.5 amp 100VDC (10VA)/1.5 amps max. Continuous carry current	107DIP	19*7.62*6.98

3U-PCB繼電器 "3U"PCB Relays

詳細產品規格--請點擊www.100y.com.tw



PartNo.	ProductNo.	Description	CoilVoltage	Type	OutlineLxWxH
20099	SU-105VS	PCB 繼電器	5VDC	SU-1*VS	17.5*5*5
21715	SU-B205S	PCB 繼電器		SU-1*VS	17.5*5*5

OMRON-PCB繼電器 OMRON-PCB Relays

詳細產品規格--請點擊www.100y.com.tw



Automotive Relay
 ● General purpose automotive relay.
 ● Handles heavy loads for various automotive applications.
 ● Plug-in and PCB types available.
 ● Wide temperature range: -0°C to +125°C
 ● High current capacity.

Application Examples
 ● Electric sunroof
 ● Retractable headlight
 ● Blower fan motor
 ● Headlamps
 ● Fuel pump

● ABS
 ● Electronic Purse Systems
 ● Vending Machines
 ● Fuel pump control
 ● ATMs



PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	OutlineLxWxH
22902	G8H-1C7P-DC12V	OMRON	Automotive Relay	20A(NO)/10A(NC)	G8H	SPDT	DC12V	23*15.5*28.2



● 測定條件: 在DC5V1A電壓降下法
 ● 測定條件: 在DC500V絕緣阻抗下, 耐電壓各項相同場所定
 ● 二極體內藏型的值
 ● 連接座P2R-05A型及P2R-08A型實裝時, AC4000V50/60HZ1分鐘
 ● 插軸型, Tab端子型的值
 ● 此值是在變頻率120次/分鐘時



詳細產品規格--請點擊www.100y.com.tw



RELAYS & SOLENIIDS


PartNo	ProductNo.	Manuf.	Description	ContactRating	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
14874	G2R-1-E	OMRON	"OMRON" POWER RELAY	16A250VDC/16A 30VDC	SPDT	12VDC	CSA,VDE	28.6*12.6*24.9



- E53-R 輸出模組額定E5AK/E5EK型用
- E53-R型繼電器AC250V 5A (阻抗負載)ON-OFF
- COIL:24VDC
- 繼電器輸出壽命電氣的-10萬次以上



PartNo	ProductNo.	Manuf.	Description	ContactRating	Type	CoilVoltage	RecognizedSafety	OutlineLxWxH
11629	E-53R	OMRON	For E5系列溫控器維修用Relay	250VAC/5A	E-53	24VDC	CSA	20*14.5*9.5mm

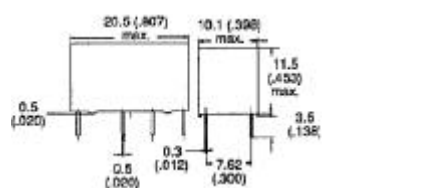

- Suitable for handling low signals in computer peripherals, telecommunications and security equipment.
- Capable of switching loads up to 2A.
- Conform to FCC part 68 1500V surge withstand.
- Reliable bifurcated crossbar contacts.
- Fully-sealed construction.

PartNo	ProductNo.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
17281	G5V-2-DC24V	General Usage 2A Relay	0.6A/125VAC, 0.6A/110VDC, 2.0A/30VDC	G5V-2	DPDT	3~48V, 3~24V	UL/CSA	10.1*20.5*11.5
18174	G5V-2-H1-5V	High-sensitivity Relay	0.5A/125V, 1.0A/24VDC	G5V-2-H1	DPDT	5V	UL/CSA	10.1*20.5*11.5




- High sensitivity and can be driven by digital circuits
- Units can be mounted side by side due to low magnetic leakage
- High reliability
- Surge withstand voltage meets FCC Part 68 regulation
- Single or dual latching coil types available


- Special models available for ultrasonic cleaning and low thermoelectromotive force

- Dimensions**
- Height .3200Inches
 - Length .7900Inches
 - Width .3900Inches

- Approvals**
- UL Approval
 - CSA Approval




PartNo	ProductNo.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
16195	G6A-274P-ST-US-12VDC	PCB繼電器	0.6A/125VAC, 2A/30VDC	G6A-274P-ST-US	2C	DC12V	UL, CSA	20.2*10.1*8.4
12350	G6A-274P-ST-US-24VDC	PCB繼電器	0.6A/125VAC, 2A/30VDC	G6A-274P-ST-US	2C	DC24V	UL, CSA	20.2*10.1*8.4
16194	G6A-274P-ST-US-5VDC	PCB繼電器	0.6A/125VAC, 2A/30VDC	G6A-274P-ST-US	2C	DC5V	UL, CSA	20.2*10.1*8.4




- High sensitivity and can be driven by digital circuits
- High reliability
- Surge withstand voltage meets FCC Part 68 regulation
- Units can be mounted side by side due to low magnetic leakage
- Special models available for ultrasonic cleaning and low thermoelectromotive force
- Single or dual latching coil types available

- Dimensions**
- Height .3200Inches
 - Length .7900Inches
 - Width .3900Inches


- Approvals**
- UL Approval
 - CSA Approval



PartNo	ProductNo.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
16888	G6AK-234P-DC12V	PCB繼電器	2A	G6AK-234P	DPDT	DC12V	UL, CSA	20.2*10.1*8.4




- Low power consumption: 200mW.
- Unique moving loop armature reduces relay size, magnetic interference, and contact bounce time.
- Single- and double-winding latching types also available.



PartNo	ProductNo.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
17980	G6B-2214P-US-DC24V	Straight PCB Relay	8A/250Vac, 5A/30Vdc	G6B-2214P-US	DPST-NO	DC24V	CSA, RL,	20*10*10
17200	G6C-2117P-US-12VDC	PCB Relay	8A/250Vac, 8A/30Vdc	G6C-2117P-US	SPST-NO+SPST-NC	DC12V	CSA	20.07*14.99*9.91




- Impulse withstand voltage of 10,000V between input and output (coil and contact)
- Creepage distance of 10mm (0.39in) minimum between coil and contact meets VDE C/250
- Dielectric strength of 4,000VAC minimum conform to UL, CSA and IEC Class II
- International 2.5mm (0.10in) terminal pitch
- Low power consumption (0.8W)



PartNo	ProductNo.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety
23811	G4W-2214P-US-HP	Power Relay	1/4HP, 125VAC	G4W-2214P-US	DPST-NO	DC24V	6~120VDC




RELAYS & SOLENOIDS



- Reduced board space ideal for high density mounting (45% smaller than the surface area of G6B)
- Slim package: measures 6.5Wx17.5Lx12.5Hmm (0.26x0.69x0.49inch)
- Switches load up to 5A, 250VAC/30VDC
- Fully sealed construction allows automatic soldering and cleaning
- Long service life: up to 300,000 operations with a 2A, 250VAC/30VDC load
- Rated for D150 pilot duty by UL, CSA
- Optional mounting sockets simplify relay installation and servicing of finished equipment


詳細產品規格--請點擊www.100y.com.tw

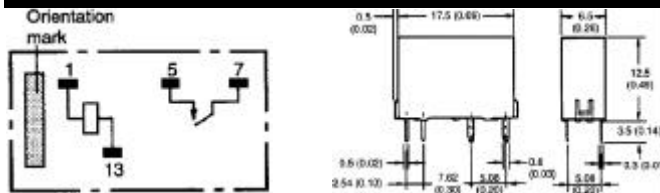

PartNo.	ProductNo.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
23973	G6D-1A-DC24VDC	PCB 繼電器	5A/250VAC, 30VDC	G6D	SPST-NO	DC24V	UL, CSA	17.5*6.5*12.5




- High sensitivity: 98-mW pickup coil power.
- Impulse withstand voltage meets FCC Part 68 requirements.
- Fully sealed construction.
- Unique moving loop armature reduces relay size, magnetic interference, and contact bounce time.
- Single- and double-winding latching types also available.

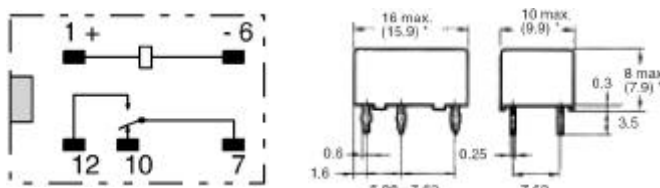

PartNo.	ProductNo.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
23975	G6E-134P-US-24VDC	PCB 繼電器	0.4A/125VAC; 2 A/30VDC	G6E	SPDT	DC24V	UL, CSA	15.9*9.9*7.9



- Heavy-duty Miniature Relay
- Incorporates environmentally-friendly, cadmium-free contacts
- Variety of contact forms: SPDT or SPST-ON (continuous current rating: 8A)
- Low profile (0.39Wx1.12Lx0.59H inches)
- High dielectric strength of 4kV with 8mm creepage/clearance
- Sealed plastic construction
- Ideal for switching contactors, solenoids and motors

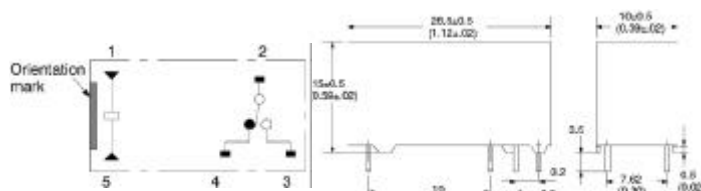

PartNo.	ProductNo.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
27612	G6RN-1-24Vdc	PCB 繼電器	8A/250Vac 5A/30Vdc	G6RN-1	SPDT	DC24V	UL, CSA	28.5*15*10

Finder-PCB 繼電器 Finder-PCB Relays

詳細產品規格--請點擊www.100y.com.tw




FR44627024

- DC and sensitive DC available
- 8mm, 6kV (1.2/50 μs) between coil and contacts
- Ambient temperature +85°C



40.61.7.024.0001
44.52.7.024

- P.C.B. or plug-in mount
- AC, DC, sensitive DC or single bistable coil versions available
- 8mm, 6kV (1.2/50 μs) between coil and contacts
- Ambient temperature +85°C
- Sockets and accessories: see 95 and 99 series




PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
17084	FR44627024	Finder	PCB 繼電器	10A	44.62	2 CO (DPDT)	24Vdc	CSA, UR, VDE	12.4*29*25
23317	40.61.7.024.0001	Finder	Miniature P.C.B. Relays	16A	40.61	1 CO (SPDT)	24Vdc	CSA, UR, VDE	12.4*29*25
17876	44.52.7.024	Finder	Miniature P.C.B. Relays	6A	44.52	2 CO (DPDT)	24Vdc	CSA, UR, VDE	12.4*29*25

Takamisawa-PCB 繼電器 Takamisawa-PCB Relays

詳細產品規格--請點擊www.100y.com.tw



- FEATURES
- UL, CSA, VDE, SEV, SEMKO, FIMKO, IMQ recognized TV-3 rated
- Working class: C
- UL class B (130°C) insulation
- Type of service: continuous duty
- Heavy duty miniature slim type power relay
- High isolation in small package
- Insulation distance: 8mm
- Dielectric strength: 5,000VAC (between coil and contacts)
- Surge strength: 10,000V
- Standard and high sensitivity types available
- Flux free type and plastic sealed type available




PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage
22071	VB12TBU-5-12VDC	TAKAMISAWA	信號用繼電器	5A, 2.4Vdc/240Vac	V B型	1/6HP, 120V/240Vdc	12Vdc

詳細產品規格--請點擊www.100y.com.tw




RELAYS & SOLENIIDS



FEATURES

- Extremely low profile and lightweight
 - Height: 5mm
 - Weight: approximately 1.2g
- UL, CSA Recognized
- Conform to FCC rules and regulations part 68
 - Surge strength 1,500V
- High reliability-bifurcated contacts
- Wide operating range
- Plastic sealed type
- Latching version available

詳細產品規格--請點擊www.100y.com.tw

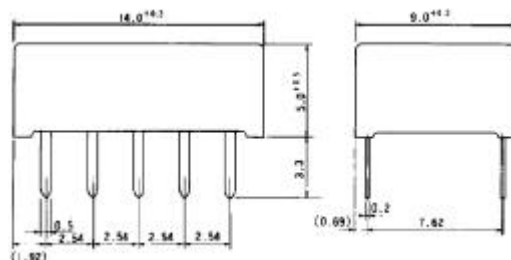

PartNo.	ProductNo.	Manuf.	Description	ContactArrangement	ContactRating	Coil Voltage	Recognized Safety	Outline LxWxH
3472	A12W-K	TAKAMISAWA	繼電器	2 Form C	1A30VDC, 0.5A125VAC	12Vdc	UL/CSA	14.0*9.0*5.0
3471	A5W-K	TAKAMISAWA	繼電器	2 Form C	1A30VDC, 0.5A125VAC	5Vdc	UL/CSA	14.0*9.0*5.0



FEATURES

- UL, CSA, VDE, SEV Recognized
- High Sensitive and Low Power Consumption
- High Isolation
- Wide Operating Range
- DIL Pitch Terminals
- Plastic Sealed Type Backfilled with Nitrogen
- Socket Mounting Type & Socket Available
- Compatible with Solid State Relays Type S Jin




PartNo.	ProductNo.	Manuf.	Description	ContactArrangement	ContactRating	Coil Voltage	Recognized Safety	Outline LxWxH
14033	JY-12H-K	TAKAMISAWA	POWER RELAY	1 Form A (SPST-NO)	5A/250VAC, 5A/30VDC	12V	UL, CSA, VDE, SEV	20*9.8*12.5mm
17447	JY-24H-K	TAKAMISAWA	POWER RELAY	1 Form A (SPST-NO)	5A30VDC/25VAC	24VDC	UL, CSA, VDE, SEV	20*9.8*12.5mm



FEATURES

- Ultra slim type with 5mm thickness
 - Good for high density mounting
- Low power consumption and high sensitivity
 - Nominal coil power: 120mW
 - Operating power: 54mW
- UL, CSA, VDE Recognized
- Conform to IEC 1010-1 and 1131-2

- Wide operating range
- SIL pitch terminals
- Plastic sealed type
- Compatible with solid state I/O module type SN (see page 376) in size and pin (terminal) arrangement
- Environmentally friendly cadmium free contact type is available.




PartNo.	ProductNo.	Manuf.	Description	ContactArrangement	ContactRating	Coil Voltage	Recognized Safety	Outline LxWxH
18691	NY24W-K	TAKAMISAWA	日製 1P 4pin 繼電器	1a	5A/250VAC	24Vdc	UL, CSA, VDE	5*20*17mm



FEATURES

- UL, CSA
- 4 kinds of contact ratings
 - Low level to 10 amp switching
- Standard and high sensitivity types available
- High surge strength version available
- UL class B (130°C) insulation type available (only plastic sealed type)
- Printed circuit terminals - fits grid with 0.1 inch
- Plastic sealed type backfilled with nitrogen available

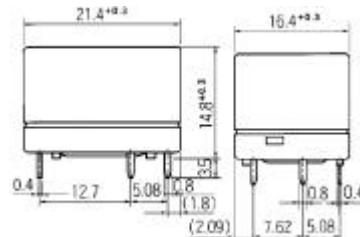


PartNo.	ProductNo.	Manuf.	Description	ContactArrangement	ContactRating	Coil Voltage	Recognized Safety	Outline LxWxH
23419	LZ-12HE	TAKAMISAWA	24V 繼電器	1 form C (SPDT)	5A120VAC/24VDC	12V	UC: UL, CSA	21.4*16.4*14.8
23416	LZ-24HE	TAKAMISAWA	24V 繼電器	1 form C (SPDT)	5A120VAC/24VDC	24V	UC: UL, CSA	21.4*16.4*14.8
23417	LZ-5HE	TAKAMISAWA	24V 繼電器	1 form C (SPDT)	5A120VAC/24VDC	5V	UC: UL, CSA	21.4*16.4*14.8



FEATURES

- Ultra high sensitivity
- UL, CSA Recognized
- Conform to FCC rules and regulations Part 68
 - Surge strength 1,500V
- High dielectric strength type available (RY-WF type)
- Contact arrangement MBB type available (RY-D type)

- High reliability-bifurcated contacts
- Wide operating range
- DIL pitch terminals
- Plastic sealed type

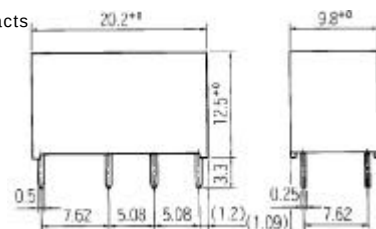

PartNo.	ProductNo.	Description	ContactArrangement	ContactRating	Coil Voltage	Recognized Safety	Outline LxWxH
14755	RY-12W-K	繼電器	2 Form C	1A24VDC, 0.5A120VAC	12Vdc	UL, CSA	20.0*9.8*12.0
14756	RY-24W-K	繼電器	2 Form C	1A24VDC, 0.5A120VAC	24Vdc	UL, CSA	20.0*9.8*12.0
14754	RY-5W-K	繼電器	2 Form C	1A24VDC, 0.5A120VAC	5Vdc	UL, CSA	20.0*9.8*12.0



勝特力科技有限公司

● 服務專線: 886-3-5753170
 ● 24小時傳真: 886-3-5753172
 ● E-mail: e100y.sale@msa.hinet.net

WWW.100Y.COM.TW

深圳百年電子有限公司

● 服務專線: 86-755-83289224
 ● 24小時傳真: 86-755-83640655
 ● Email: 100y@163.com

29-07


RELAYS & SOLENIIDS

Bestar-PCB繼電器 Bestar-PCBRelays

詳細產品規格--請點擊www.100y.com.tw




- FEATURES**
- Single pole Double throw (1 Form C)
 - Small size (15.5*10.5*11.3mm)
 - Power consumption of standard type 360mW and high sensitivity type 200mW
 - DIL terminal
 - Application: OA equipment, Security alarm systems, and Telecommunication equipment etc...




PartNo.	ProductNo.	Manuf.	Description	ContactArrangement	ContactRating	CoilVoltage	RecognizedSafety	OutlineLxWxH
2891	BS-102-12	Bsetar	繼電器	1 Form C 1A	120Vac/2A24Vdc	12Vdc	UL,CSA	15.5*10.5*11.3
2890	BS-102-5	Bsetar	繼電器	1 Form C 1A	120Vac/2A24Vdc	5Vdc	UL,CSA	15.5*10.5*11.3

Matsushita-PCB繼電器 Matsushita-PCBRelays


詳細產品規格--請點擊www.100y.com.tw




- FEATURES**
- Latching types available
 - Wide switching range From 100 μ A 100mVDC to 4A 250VAC
 - Low thermal electromotive force Approx. 3 μ V
 - Dual In-Line packaging arrangement
 - Ambient types available
 - High sensitivity in small size 100mW pick-up and 200mW nominal operating power
 - A variety of contact arrangements 2 Form A 2 Form B, 3 Form A 1 Form B, 4 Form A
 - High shock and vibration resistance Shock: 50G Vibration: 10 to 55Hz at double amplitude of 3mm. 118inch



PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	CoilVoltage	OutlineLxWxH
12955	S4E-DC24V	MATSUSHITA	PCB繼電器	4A/250V3A/30VDC	S4E	24VDC	27*12*10mm



- FEATURES**
- 2 Form C contact
 - High sensitivity-200mW nominal operating power
 - High breakdown voltage: 1500V FCC surge between open contacts
 - DIP-2C type matching 16 pin IC socket
 - Sealed construction



Part No.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	OutlineLxWxH
22581	DS2Y-S-DC3V	MATSUSHITA	MINIATURE RELAY	0.3~2.10	DS2Y	2 Form C	45ohm	20*9.9*9.3

TTI-PCB繼電器 TTI-PCBRelays

詳細產品規格--請點擊www.100y.com.tw




- MAINFEATURES**
- Ultraminiaturized design, extremely lightweight
 - 30A maximum continuous current
- APPLICATIONS**
- Motor control
 - Lamp control
 - Interval wiper control
 - Rear window and seat heating



PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
22857	TR20-12D-SC-CL	TTI	TTI Relay	25A/14VDC	TR20	1 Form C	12VDC	CUL	12* 9.5mm



- MAINFEATURES**
- TR72 series relay covers switching capacity from dry circuit by 10A to comply with user's wide selection.
 - UL, CSA recognized.
 - 2.54mm terminal pitch employment equal to C terminal pitch.
 - Employment of suitable plastic material to be applied to high temperature and various chemical solutions.
 - Complete protective construction from dust and soldering flux. If required. Plastic epoxy resin sealed type is available for washing procedure.
- APPLICATIONS**
- Cooling Appliance, air conditioner, audio equipment, domestic appliance, car control unit, etc.

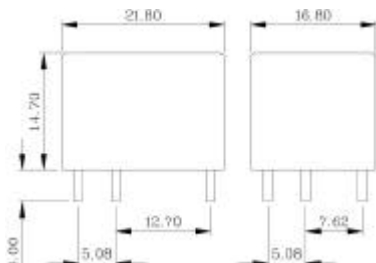

PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
22858	TR72-12D-FB-C	TTI	TTI Relay	10A/28VDC	TR72	1 Form C	12VDC	CUL	21.8*16.8*14.7
22859	TR72-12D-SB-C	TTI	TTI Relay	10A/28VDC	TR72	1 Form C	12VDC	CUL	21.8*16.8*14.7
22860	TR72-24D-SB-C	TTI	TTI Relay	10A/28VDC	TR72	1 Form C	24VDC	CUL	21.8*16.8*14.7
22862	TR72-5D-SB-C	TTI	TTI Relay	10A/28VDC	TR72	1 Form C	5VDC	CUL	21.8*16.8*14.7
22863	TR72-6D-SB-C	TTI	TTI Relay	10A/28VDC	TR72	1 Form C	6VDC	CUL	21.8*16.8*14.7
22864	TR72-9D-SB-C	TTI	TTI Relay	10A/28VDC	TR72	1 Form C	9VDC	CUL	21.8*16.8*14.7



RELAYS & SOLENIIDS

Part No.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	OutlineLxWxH
22889	TR94-12D-PC-A	TTI	TTI Relay	70A/14VDC	TR94	1 From A	12VDC	30*30*25mm
22890	TR94-12D-PC-C	TTI	TTI Relay	70A/14VDC	TR94	1 From C	12VDC	30*30*25mm
22892	TR94-12D-SC-A	TTI	TTI Relay	70A/14VDC	TR94	1 From A	12VDC	30*30*25mm
22895	TR94-24D-PC-A	TTI	TTI Relay	70A/14VDC	TR94	1 From A	24VDC	30*30*25mm
22896	TR94-24D-PC-C	TTI	TTI Relay	70A/14VDC	TR94	1 From C	24VDC	30*30*25mm



MAINFEATURES

- Smallsizeandlowcost.
- Lowcoilpowerconsumption.
- PCBmounting.
- Switchingcapacityfrom1Ato5A.
- Sealedtypeavailable.

APPLICATIONS

- Audioequipment.
- Communicationequipment.
- Remotecontrol.
- Acousticcontrolledtoys.



Part No.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	OutlineLxWxH
22897	TR99-12VDC-SB-CD	TTI	TTI Relay	5A/28VDC	TR99	DPDT	12VDC	21.6*16*16.5
22901	TR99-24VDC-SB-CD	TTI	TTI Relay	5A/28VDC	TR99	DPDT	24VDC	21.6*16*16.5
22903	TR99-5VDC-SB-CD	TTI	TTI Relay	5A/28VDC	TR99	DPDT	5VDC	21.6*16*16.5
22904	TR99-9VDC-SB-CD	TTI	TTI Relay	5A/28VDC	TR99	DPDT	9VDC	21.6*16*16.5




MAINFEATURES

- SmallsizeandlightweightoffershighdensityP.C. Boardtechnique.
- Freefromdust,gases,humidity,etc.byemploymentofglasstubesealed reedswitchforhighreliabilitycontactperformance.
- Switchingcapacityfromdrycircuituseby1Aselectableto complywith wideapplications.
- Fastresponsetimeinadditiontoshortbouncingtimeto applications associatedwithsemiconductorsliketransistors,I.C.'s.

APPLICATIONS

- Communequipment,domesticappliance,securityequipment,office automationmachinf,etc.

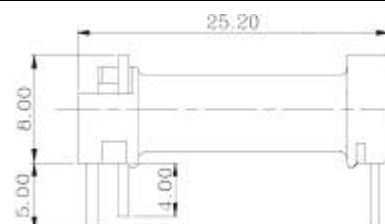

PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	CoilVoltage	OutlineLxWxH
22905	TRA-1050(ohm)12VDC	TTI	TTI Relay	0.5A/24VDC	TRA	12VDC	25.2*8.1*9.0mm
22906	TRA-2080(ohm)24VDC	TTI	TTI Relay	0.5A/24VDC	TRA	24VDC	25.2*8.1*9.0mm
22907	TRA-250(ohm)5VDC	TTI	TTI Relay	0.5A/24VDC	TRA	5VDC	25.2*8.1*9.0mm
22910	TRA-250(ohm)6VDC	TTI	TTI Relay	0.5A/24VDC	TRA	6VDC	25.2*8.1*9.0mm
22911	TRA-500(ohm)5VDC	TTI	TTI Relay	0.5A/24VDC	TRA	5VDC	25.2*8.1*9.0mm
22912	TRA-700(ohm)9VDC	TTI	TTI Relay	0.5A/24VDC	TRA	9VDC	25.2*8.1*9.0mm




MAINFEATURES

- SubminiatureType.
- SilverorSilverAlloyContactswithGoldPlated.
- LowDissipation.
- SealedTypeAvailable.
- DesignconformstoforeignsafetystandardUL.

APPLICATIONS

- MicroprocessorControl,StoreProgramExchangerandHousehold Appliance.



PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
22913	TRB-12D-SA-CL0.2W	TTI	TTI Relay	1A 125VAC/30VDC	TRB	1 FromC	12VDC	CUL	15.5*10.7*11.8
16377	TRB-12D-SB3-CD	TTI	TTI Relay	1A 120VAC/24VDC	TRB	1 FromC	12VDC	UL,CUL	15.5*10.7*15.3
22914	TRB-12D-SB3-CD0.36W	TTI	TTI Relay	3A 125VAC/30VDC	TRB	1 FromC	12VDC	CUL	15.5*10.7*11.8
22919	TRB-24D-SA-CL	TTI	TTI Relay	1A 125VAC/30VDC	TRB	1 FromC	24VDC	CUL	15.5*10.7*11.8
22915	TRB-24D-SB3-CD0.36W	TTI	TTI Relay	3A 125VAC/30VDC	TRB	1 FromC	24VDC	CUL	15.5*10.7*11.8
22920	TRB-3D-SB3-CD	TTI	TTI Relay	3A 125VAC/30VDC	TRB	1 FromC	3VDC	CUL	15.5*10.7*11.8
22916	TRB-5D-SB3-CD0.36W	TTI	TTI Relay	3A 125VAC/30VDC	TRB	1 FromC	5VDC	CUL	15.5*10.7*11.8
22921	TRB-6D-SA-CD	TTI	TT Relay	1A 125VAC/30VDC	TRB	1 FromC	6VDC	CUL	15.5*10.7*11.8
22917	TRB-6D-SB3-CD0.36W	TTI	TTI Relay	3A 125VAC/30VDC	TRB	1 FromC	6VDC	CUL	15.5*10.7*11.8
22918	TRB-9D-SB3-CD0.36W	TTI	TTI Relay	3A 125VAC/30VDC	TRB	1 FromC	9VDC	CUL	15.5*10.7*11.8




MAINFEATURES

- SubminiatureType.
- SilverorSilverAlloyContactswithGoldPlated.
- LowDissipation.
- SealedTypeAvailable.
- DesignconformstoforeignsafetystandardUL.

APPLICATIONS

- MicroprocessorControl,StoreProgramExchangerandHousehold Appliance.

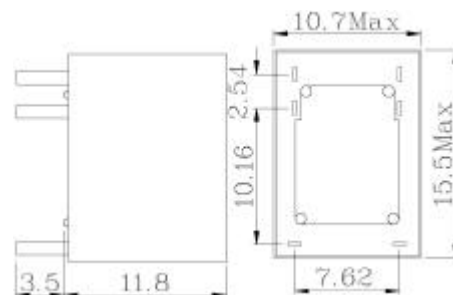

詳細產品規格--請點擊www.100y.com.tw



RELAYS & SOLENIIDS

PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
22922	TRBS-12D-SA-CL	TTI	TTI Relay	1 A 125VAC/30VDC	TRBS	1 From C	12VDC	CUL	15.5*10.7*11.8mm
22925	TRBS-12D-SB3-CD	TTI	TTI Relay	3 A 125VAC/30VDC	TRBS	1 From C	12VDC	CUL	15.5*10.7*11.8mm
22926	TRBS-24D-SA-CL	TTI	TTI Relay	1 A 125VAC/30VDC	TRBS	1 From C	24VDC	CUL	15.5*10.7*11.8mm
22927	TRBS-5D-SA-CL	TTI	TTI Relay	1 A 125VAC/30VDC	TRBS	1 From C	5VDC	CUL	15.5*10.7*11.8mm
22930	TRBS-6D-SA-CL	TTI	TTI Relay	1 A 125VAC/30VDC	TRBS	1 From C	6VDC	CUL	15.5*10.7*11.8mm
22931	TRBS-9D-SA-CL	TTI	TTI Relay	1 A 125VAC/30VDC	TRBS	1 From C	9VDC	CUL	15.5*10.7*11.8mm



MAINFEATURES

- Smallest size (10.2x18.2x4.8mm) at 10A switching capacity relay for high density P.C. board mounting technique.
- 1A and 1C contact from available.
- Surge resistiveness of 5000V on series relays.
- Design conform to foreign safety standard (UL/CSA/TUV).
- Selection of plastic insulation material for high temperature and better chemical solution performance.



PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
22932	TRC-12D-FB-AD	TTI	TTI Relay	10A 120VAC/28VDC	TRC	1 From A	12VDC	CUL	18.2*10.0*14.8
22933	TRC-12D-FB-AL0.2W	TTI	TTI Relay	7A 120VAC/28VDC	TRC	1 From A	12VDC	CUL	18.2*10.0*14.8
22934	TRC-12D-FB-CD	TTI	TTI Relay	10A 120VAC/28VDC	TRC	1 From C	12VDC	CUL	18.2*10.0*14.8
22935	TRC-12D-FC-AD	TTI	TTI Relay	10A 120VAC/28VDC	TRC	1 From A	12VDC	CUL	18.2*10.0*14.8
22936	TRC-12D-SB-AL0.2W	TTI	TTI Relay	7A 120VAC/28VDC	TRC	1 From A	12VDC	CUL	18.2*10.0*14.8
3896	TRC-12VDC-FB-AD	TTI	TTI Relay	10A 120Vac/10A 28Vdc	TRC	1PST	12VDC	UL, CSA, VDE,	17.5*9.5*14.5
22939	TRC-24-FB-AL0.2W	TTI	TTI Relay	7A 120VAC/28VDC	TRC	1 From A	24VDC	CUL	18.2*10.0*14.8
22940	TRC-24D-FB-CD	TTI	TTI Relay	10A 120VAC/28VDC	TRC	1 From C	24VDC	CUL	18.2*10.0*14.8
22941	TRC-24D-SB-AL0.2W	TTI	TTI Relay	7A 120VAC/28VDC	TRC	1 From A	24VDC	CUL	18.2*10.0*14.8
22943	TRC-24D-SB-CD	TTI	TTI Relay	10A 120VAC/28VDC	TRC	1 From C	24VDC	CUL	18.2*10.0*14.8
22944	TRC-24D-SC-AD	TTI	TTI Relay	10A 120VAC/28VDC	TRC	1 From C	24VDC	CUL	18.2*10.0*14.8
22945	TRC-24D-SC-AL	TTI	TTI Relay	7A 120VAC/28VDC	TRC	1 From A	24VDC	CUL	18.2*10.0*14.8
12715	TRC-24VDC-FB-AD	TTI	TTI Relay	10A 120Vac/10A 28Vdc	TRC	1PST	24VDC	UL, CSA, VDE,	17.5*9.5*14.5
22946	TRC-5D-FB-AL	TTI	TTI Relay	7A 120VAC/28VDC	TRC	1 From A	5VDC	CUL	18.2*10.0*14.8
22947	TRC-5D-FB-CD	TTI	TTI Relay	10A 120VAC/28VDC	TRC	1 From C	5VDC	CUL	18.2*10.0*14.8
16750	TRC-5VDC-FB-AD	TTI	TTI Relay	10A 120Vac/10A 28Vdc	TRC	1 From A	5VDC	UL, CSA, VDE,	17.5*9.5*14.5
3832	TRC-5VDC-FB-CD	TTI	TTI Relay	10A 120Vac/10A 28Vdc	TRC	1PDT	5VDC	UL, CSA, VDE,	17.5*9.5*14.5
22948	TRC-6D-FB-AD	TTI	TTI Relay	10A 120VAC/28VDC	TRC	1 From A	6VDC	CUL	18.2*10.0*14.8
22950	TRC-6D-FB-CD	TTI	TTI Relay	10A 120VAC/28VDC	TRC	1 From C	6VDC	CUL	18.2*10.0*14.8
22951	TRC-9D-FB-AD	TTI	TTI Relay	10A 120VAC/28VDC	TRC	1 From A	9VDC	CUL	18.2*10.0*14.8




MAINFEATURES

- 10A switching capabilities.
- SPST-NO configuration.
- Subminiature, standard PC layout.
- Sealed & Unsealed types available.

APPLICATIONS

- House-hold appliances; Electronic controller equipment, etc.



PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
22937	TRCF-18D-FB-AD	TTI	TTI Relay	12A 125VAC/30VDC	TRCF	1 From A	18VDC	CUL	18.4*15.2*10.2mm
22938	TRCF-18D-SB-AD	TTI	TTI Relay	12A 125VAC/30VDC	TRCF	1 From A	18VDC	CUL	18.4*15.2*10.2mm




MAINFEATURES

- Switching capacity available by 12A in spite of small sized design for high density P.C. Board mounting technique.
- UL/CSA recognized TRDT (TV-5 Approval).
- Selection of plastic material for high temperature and better chemical solution performance.
- Sealed types available.
- Simpler relay magnetic circuit to meet low cost of mass production.

APPLICATIONS

- TRD: Domestic appliance, office machine, audio, equipment, automobile, etc.
- TRDT: Remote control TV receiver, monitor display, audio equipment, high rushing current use application.

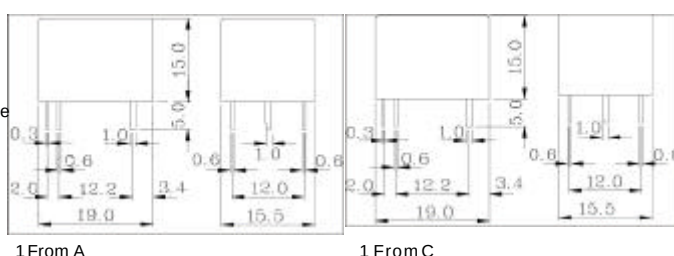

PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
22952	TRD-12D-FB-AL	TTI	TTI Relay	12A 120VAC/28VDC	TRD	1 From A	12VDC	CUL	19.0*15.5*15.0mm
22955	TRD-12D-FB-CD	TTI	TTI Relay	12A 120VAC/28VDC	TRD	1 From C	12VDC	CUL	19.0*15.5*15.0mm
22956	TRD-12D-FB-CL	TTI	TTI Relay	12A 120VAC/28VDC	TRD	1 From C	12VDC	CUL	19.0*15.5*15.0mm
22958	TRD-12D-FC-AL	TTI	TTI Relay	12A 120VAC/28VDC	TRD	1 From A	12VDC	CUL	19.0*15.5*15.0mm
22959	TRD-12D-FC-CD	TTI	TTI Relay	12A 120VAC/28VDC	TRD	1 From C	12VDC	CUL	19.0*15.5*15.0mm



勝特力科技有限公司

- 服務專線: 886-3-5753170
- 24小時傳真: 886-3-5753172
- E-mail: e100y.sale@msa.hinet.net

WWW.100Y.COM.TW

深圳百年電子有限公司

- 服務專線: 86-755-83289224
- 24小時傳真: 86-755-83640655
- Email: 100y@163.com

29-11

RELAYS & SOLENIIDS






MAIN FEATURES

- Miniature heavy-duty relays
- Single-Pole, 10Amp PCB Mount
- SPST and SPDT configurations
- 5KV dielectric coil to contacts
- Sealed & Unsealed types available

APPLICATIONS

● Microwave Ovens, Facsimiles, Refrigerators, Air Conditioners, Stereo Equipment, Copier, TV Set, Vending Machines, Temperature Controllers, etc.



PartNo.	ProductNo.	Manuf.	Description	Contact Rating	Type	Contact Arrangement	Coil Voltage	Recognized Safety	Outline LxWxH
22990	TRIH-12D-FB-1CE	TTI	TTI Relay	8A 250VAC/30VDC	TRIH	SPDT	12VDC	CUL	29.0*13.0*25.5mm
22993	TRIH-12D-FB-2AM	TTI	TTI Relay	5A 250VAC/30VDC	TRIH	DPST	12VDC	CUL	29.0*13.0*25.5mm
22994	TRIH-12D-FB-2CM	TTI	TTI Relay	2A 250VAC/30VDC	TRIH	DPDT	12VDC	CUL	29.0*13.0*25.5mm
22995	TRIH-12D-SB-1AE	TTI	TTI Relay	16A 250VAC/30VDC	TRIH	SPST	12VDC	CUL	29.0*13.0*25.5mm
22996	TRIH-12D-SB-1AH	TTI	TTI Relay	10A 250VAC/30VDC	TRIH	SPST	12VDC	CUL	29.0*13.0*25.5mm
22997	TRIH-12D-SB-1CE	TTI	TTI Relay	8A 250VAC/30VDC	TRIH	SPDT	12VDC	CUL	29.0*13.0*25.5mm
22998	TRIH-12D-SB-1CH	TTI	TTI Relay	7.5A 250VAC/30VDC	TRIH	SPDT	12VDC	CUL	29.0*13.0*25.5mm
22999	TRIH-12D-SB-2CM	TTI	TTI Relay	2A 250VAC/30VDC	TRIH	DPDT	12VDC	CUL	29.0*13.0*25.5mm
23000	TRIH-24D-FB-1AE	TTI	TTI Relay	16A 250VAC/30VDC	TRIH	SPST	24VDC	CUL	29.0*13.0*25.5mm
23001	TRIH-24D-FB-1AH	TTI	TTI Relay	10A 250VAC/30VDC	TRIH	SPST	24VDC	CUL	29.0*13.0*25.5mm
23002	TRIH-24D-FB-1CE	TTI	TTI Relay	8A 250VAC/30VDC	TRIH	SPDT	24VDC	CUL	29.0*13.0*25.5mm
23003	TRIH-24D-FB-1CH	TTI	TTI Relay	7.5A 250VAC/30VDC	TRIH	SPDT	24VDC	CUL	29.0*13.0*25.5mm
23004	TRIH-24D-FB-2CM	TTI	TTI Relay	2A 250VAC/30VDC	TRIH	DPDT	24VDC	CUL	29.0*13.0*25.5mm
23005	TRIH-24D-SB-1AE	TTI	TTI Relay	16A 250VAC/30VDC	TRIH	SPST	24VDC	CUL	29.0*13.0*25.5mm
23006	TRIH-24D-SB-1AH	TTI	TTI Relay	10A 250VAC/30VDC	TRIH	SPST	24VDC	CUL	29.0*13.0*25.5mm
23007	TRIH-24D-SB-1CE	TTI	TTI Relay	8A 250VAC/30VDC	TRIH	SPDT	24VDC	CUL	29.0*13.0*25.5mm
23008	TRIH-24D-SB-1CH	TTI	TTI Relay	7.5A 250VAC/30VDC	TRIH	SPDT	24VDC	CUL	29.0*13.0*25.5mm
23009	TRIH-24D-SB-2CM	TTI	TTI Relay	2A 250VAC/30VDC	TRIH	DPDT	24VDC	CUL	29.0*13.0*25.5mm
23010	TRIH-48D-SB-2CM	TTI	TTI Relay	2A 250VAC/30VDC	TRIH	DPDT	48VDC	CUL	29.0*13.0*25.5mm
23012	TRIH-5D-SB-1CH	TTI	TTI Relay	7.5A 250VAC/30VDC	TRIH	SPDT	5VDC	CUL	29.0*13.0*25.5mm
23013	TRIH-5D-SB-2CM	TTI	TTI Relay	2A 250VAC/30VDC	TRIH	DPDT	5VDC	CUL	29.0*13.0*25.5mm
23015	TRIH-9D-FB-2CM	TTI	TTI Relay	2A 250VAC/30VDC	TRIH	DPDT	9VDC	CUL	29.0*13.0*25.5mm




MAIN FEATURES

- 5A, 10A switching capabilities
- SPST-NO and SPDT configuration
- Subminiature, standard PC layout
- Sealed & Unsealed types available


APPLICATIONS

● House-hold appliance, office machine, etc.



1 From A

1 From C



PartNo.	ProductNo.	Manuf.	Description	Contact Rating	Type	Contact Arrangement	Coil Voltage	Outline LxWxH
23026	TRJ-12D-FB-AL	TTI	TTI Relay	5A 250VAC/30VDC	TRJ	1 From A	12VDC	20.5*10.6*15.3mm
23027	TRJ-12D-SB-CD0.4W	TTI	TTI Relay	5A 250VAC/30VDC	TRJ	1 From C	12VDC	20.5*10.6*15.3mm
23028	TRJ-24D-FB-CD	TTI	TTI Relay	5A 250VAC/30VDC	TRJ	1 From C	24VDC	20.5*10.6*15.3mm
23033	TRJ-24D-SB-CD	TTI	TTI Relay	5A 250VAC/30VDC	TRJ	1 From C	24VDC	20.5*10.6*15.3mm
23034	TRJ-5D-SB-AL	TTI	TTI Relay	5A 250VAC/30VDC	TRJ	1 From A	5VDC	20.5*10.6*15.3mm
23035	TRJ-5D-SB-CD	TTI	TTI Relay	5A 250VAC/30VDC	TRJ	1 From C	5VDC	20.5*10.6*15.3mm




MAIN FEATURES


- 16A switching capabilities.
- 1 & 2 pole configurations.
- 5KV/10mm dielectric coil to contacts.
- Low height of 15.7mm
- Sealed & Unsealed types available.

APPLICATIONS


● Microwave Ovens, Facsimiles, Refrigerators, Air Conditioners, Stereo Equipment, Copier, TV Set, Vending Machines, Temperature Controllers, etc.



8 A



12A



16A

PartNo.	ProductNo.	Manuf.	Description	Contact Rating	Type	Contact Arrangement	Coil Voltage	Recognized Safety	Outline LxWxH
23016	TRIL-12D-SB-1AE0.4W	TTI	TTI Relay	16A 250VAC/30VDC	TRIL	SPST	12VDC	CUL	29.0*12.7*15.7mm
23018	TRIL-12D-SB-1CE	TTI	TTI Relay	16A 250VAC/30VDC	TRIL	SPDT	12VDC	CUL	29.0*12.7*15.7mm
23019	TRIL-12D-SB-1CH	TTI	TTI Relay	12A 250VAC/30VDC	TRIL	SPDT	12VDC	CUL	29.0*12.7*15.7mm
23020	TRIL-12D-SB-2CM	TTI	TTI Relay	8A 250VAC/30VDC	TRIL	DPDT	12VDC	CUL	29.0*12.7*15.7mm
23021	TRIL-24D-SB-1CE	TTI	TTI Relay	16A 250VAC/30VDC	TRIL	SPDT	24VDC	CUL	29.0*12.7*15.7mm
23022	TRIL-24D-SB-1CH	TTI	TTI Relay	12A 250VAC/30VDC	TRIL	SPDT	24VDC	CUL	29.0*12.7*15.7mm
23023	TRIL-24D-SB-2CM	TTI	TTI Relay	8A 250VAC/30VDC	TRIL	DPDT	24VDC	CUL	29.0*12.7*15.7mm
23024	TRIL-5D-SB-1CH	TTI	TTI Relay	12A 250VAC/30VDC	TRIL	SPDT	5VDC	CUL	29.0*12.7*15.7mm
23025	TRIL-5D-SB-2CM	TTI	TTI Relay	8A 250VAC/30VDC	TRIL	DPDT	5VDC	CUL	29.0*12.7*15.7mm

詳細產品規格--請點擊www.100y.com.tw



RELAYS & SOLENIIDS



MAIN FEATURES

- Long life and high reliability
- Strong construction for vibration and shock
- Approximately thousands of kinds are available depending on the combination of terminals, covers, contact ratings, coil etc.
- Plastic-sealed type is available
- Molded material: All UL94V-0
- UL recognized

APPLICATIONS

- Coil operated machines
- Vending machines
- Refrigerators
- Transportations
- Power station control equipment
- Office machines
- Building control equipment
- Medical equipment
- Amusement devices, etc.



PartNo.	ProductNo.	Manuf.	Description	Contact Rating	Type	Contact Arrangement	Coil Voltage	Recognized Safety	Outline LxWxH
23036	TRL-110A-P-2C	TTI	TTI Relay	10A 250VAC/30VDC	TRL	DPDT	110VAC	UL	28.0*21.0*35.5mm
23037	TRL-110A-S-2C	TTI	TTI Relay	10A 250VAC/30VDC	TRL	DPDT	110VAC	UL	28.0*21.0*35.5mm
23038	TRL-110D-P-2C	TTI	TTI Relay	10A 250VAC/30VDC	TRL	DPDT	110VDC	UL	28.0*21.0*35.5mm
23039	TRL-12D-P-2C	TTI	TTI Relay	10A 250VAC/30VDC	TRL	DPDT	12VDC	UL	28.0*21.0*35.5mm
23040	TRL-12D-S-2C	TTI	TTI Relay	10A 250VAC/30VDC	TRL	DPDT	12VDC	UL	28.0*21.0*35.5mm
23041	TRL-24A-P-2C	TTI	TTI Relay	10A 250VAC/30VDC	TRL	DPDT	24VAC	UL	28.0*21.0*35.5mm
23042	TRL-24D-P-2C	TTI	TTI Relay	10A 250VAC/30VDC	TRL	DPDT	24VDC	UL	28.0*21.0*35.5mm
23043	TRL-24D-S-2C	TTI	TTI Relay	10A 250VAC/30VDC	TRL	DPDT	24VDC	UL	28.0*21.0*35.5mm
23044	TRL-5D-S-2C	TTI	TTI Relay	10A 250VAC/30VDC	TRL	DPDT	5VDC	UL	28.0*21.0*35.5mm




MAIN FEATURES

- Single CONTACT and double CONTACT types offer switching capacity by 15A in small size for exclusive automobile control relays switching box use.
- PCB board terminal.
- Simple magnetic circuit to meet mass production for low cost offer. Standard type is open type without dust cover. If dust cover required, suitable cased relay can be prepared.
- Operating ambient temperature range covers from -40°C by 85°C at no current on relay's CONTACTS..

APPLICATIONS

- Car control switching box (alarm system, automatic door locking) wiper motor Reversing, window lifter, Flashers or turning signals, Air conditioning, Fuel pump control system, etc.

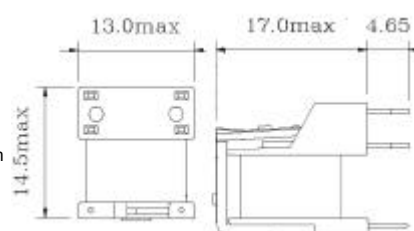

PartNo.	ProductNo.	Manuf.	Description	Contact Rating	Type	Contact Arrangement	Coil Voltage	Outline LxWxH
23045	TRM-12D-H	TTI	TTI Relay	1A 120VAC/12VDC	TRM	1 From A	12VDC	14.5*13.0*17.0mm
23046	TRM-12D-SA-SH	TTI	TTI Relay	2A 120VAC/12VDC	TRM	1 From U	12VDC	14.5*13.0*17.0mm
23048	TRM-12D-SA-SZ	TTI	TTI Relay	2A 120VAC/12VDC	TRM	1 From W	12VDC	14.5*13.0*17.0mm
23049	TRM-12D-SC-SH	TTI	TTI Relay	2A 120VAC/12VDC	TRM	1 From U	12VDC	14.5*13.0*17.0mm
23050	TRM-12D-ZF	TTI	TTI Relay	1A 120VAC/12VDC	TRM	1 From C	12VDC	14.5*13.0*17.0mm
23051	TRM-12VDC-SC-SH	TTI	TTI Relay	2A 120VAC/12VDC	TRM	1 From U	12VDC	14.5*13.0*17.0mm
23052	TRM-24VDC-SC-SH	TTI	TTI Relay	2A 120VAC/12VDC	TRM	1 From U	24VDC	14.5*13.0*17.0mm




MAIN FEATURES

- Subminiature, PCB Mounting.
- Heavy Duty, Silver Alloy Contacts up to 30A or 45A.
- 1 Form A, 1 Form B or 1 Form C.
- Two different spacing arrangements of terminals are available to meet the world standards.
- Used for Automotives, Industrial Control, Household Appliances and Heavy Loads, etc.

APPLICATIONS

- Direction Indicators
- Interval Wipers Control
- Fuel Pump Control
- Ventilation Motor
- Hazard Lights
- Heater Control
- Rear Window Heating
- Air Conditioning
- Central door lock
- Anti-lock braking system
- Self tension adjustment
- Window lifter
- Seat positioning
- Flashers or turning signals
- Car alarm system
- Initial value control
- Automatic mirror adjustment
- Sliding roof

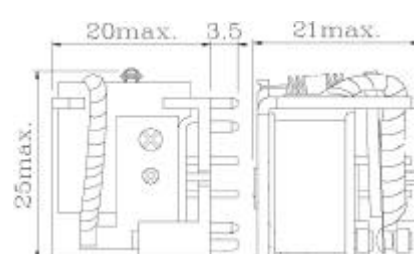

PartNo.	ProductNo.	Manuf.	Description	Contact Rating	Type	Contact Arrangement	Coil Voltage	Outline LxWxH
23054	TRP-12D-AC8	TTI	TTI Relay	45A 60VAC/75VDC	TRP	1 From A	12VDC	26.5*21.5*21.5mm
23055	TRP-12D-CA8	TTI	TTI Relay	45A 60VAC/75VDC	TRP	1 From C	12VDC	26.5*21.5*21.5mm
23056	TRP-12D-SA-A8	TTI	TTI Relay	45A 60VAC/75VDC	TRP	1 From A	12VDC	26.5*21.5*21.5mm
23057	TRP-12D-SA-C11	TTI	TTI Relay	45A 60VAC/75VDC	TRP	1 From C	12VDC	26.5*21.5*21.5mm
23058	TRP-12D-SA-C8	TTI	TTI Relay	45A 60VAC/75VDC	TRP	1 From C	12VDC	26.5*21.5*21.5mm
23059	TRP-12D-SC-A11	TTI	TTI Relay	45A 60VAC/75VDC	TRP	1 From A	12VDC	26.5*21.5*21.5mm
23060	TRP-12D-SC-C11	TTI	TTI Relay	45A 60VAC/75VDC	TRP	1 From C	12VDC	26.5*21.5*21.5mm
23061	TRP-24D-CA8	TTI	TTI Relay	45A 60VAC/75VDC	TRP	1 From C	24VDC	26.5*21.5*21.5mm
23062	TRP-24D-CC8	TTI	TTI Relay	45A 60VAC/75VDC	TRP	1 From C	24VDC	26.5*21.5*21.5mm
23064	TRP-24D-SA-C11	TTI	TTI Relay	45A 60VAC/75VDC	TRP	1 From C	24VDC	26.5*21.5*21.5mm
23066	TRP-24D-SA-C8	TTI	TTI Relay	45A 60VAC/75VDC	TRP	1 From C	24VDC	26.5*21.5*21.5mm
23068	TRP-24D-SC-C8	TTI	TTI Relay	45A 60VAC/75VDC	TRP	1 From C	24VDC	26.5*21.5*21.5mm

詳細產品規格--請點擊www.100y.com.tw



勝特力科技有限公司

- 服務專線: 886-3-5753170
- 24小時傳真: 886-3-5753172
- E-mail: e100y.sale@msa.hinet.net

WWW.100Y.COM.TW

深圳百年電子有限公司

- 服務專線: 86-755-83289224
- 24小時傳真: 86-755-83640655
- Email: 100y@163.com

29-14

RELAYS & SOLENIIDS

PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
23101	TRU-12D-FB-AL	TTI	TTI Relay	12A 120VAC/28VDC	TRU	1 From A	12VDC	UL,CSA	20.2*16.5*20.2mm
23102	TRU-12D-FB-CL	TTI	TTI Relay	12A 120VAC/28VDC	TRU	1 From C	12VDC	UL,CSA	20.2*16.5*20.2mm
23103	TRU-12D-FC-CL	TTI	TTI Relay	12A 120VAC/28VDC	TRU	1 From C	12VDC	UL,CSA	20.2*16.5*20.2mm
23104	TRU-12D-SB-AL	TTI	TTI Relay	12A 120VAC/28VDC	TRU	1 From A	12VDC	UL,CSA	20.2*16.5*20.2mm
23105	TRU-12D-SB-CL	TTI	TTI Relay	12A 120VAC/28VDC	TRU	1 From C	12VDC	UL,CSA	20.2*16.5*20.2mm
23106	TRU-24D-FB-AL	TTI	TTI Relay	12A 120VAC/28VDC	TRU	1 From A	24VDC	UL,CSA	20.2*16.5*20.2mm
23107	TRU-24D-FB-CL	TTI	TTI Relay	12A 120VAC/28VDC	TRU	1 From C	24VDC	UL,CSA	20.2*16.5*20.2mm
23108	TRU-24D-FC-CD	TTI	TTI Relay	12A 120VAC/28VDC	TRU	1 From C	24VDC	UL,CSA	20.2*16.5*20.2mm
23109	TRU-24D-SB-CD	TTI	TTI Relay	12A 120VAC/28VDC	TRU	1 From C	24VDC	UL,CSA	20.2*16.5*20.2mm
23110	TRU-24D-SB-CL	TTI	TTI Relay	12A 120VAC/28VDC	TRU	1 From C	24VDC	UL,CSA	20.2*16.5*20.2mm
23111	TRU-3D-SB-CL	TTI	TTI Relay	12A 120VAC/28VDC	TRU	1 From C	3VDC	UL,CSA	20.2*16.5*20.2mm
23112	TRU-48D-FB-AL	TTI	TTI Relay	12A 120VAC/28VDC	TRU	1 From A	48VDC	UL,CSA	20.2*16.5*20.2mm
23113	TRU-5D-FB-CL	TTI	TTI Relay	12A 120VAC/28VDC	TRU	1 From C	5VDC	UL,CSA	20.2*16.5*20.2mm
23114	TRU-5D-SB-CL	TTI	TTI Relay	12A 120VAC/28VDC	TRU	1 From C	5VDC	UL,CSA	20.2*16.5*20.2mm
23115	TRU-6D-FB-CL	TTI	TTI Relay	12A 120VAC/28VDC	TRU	1 From C	6VDC	UL,CSA	20.2*16.5*20.2mm
23116	TRU-9D-FB-CL	TTI	TTI Relay	12A 120VAC/28VDC	TRU	1 From C	9VDC	UL,CSA	20.2*16.5*20.2mm



MAINFEATURES

- Highcapacitytype(16A)available.
- Highsensitivity0.2W(1FormA).
- Flattype:L×W×H=16.5mm×22.2mm×11.2mm.

APPLICATIONS

- Homeappliances:Airconditioner,heater,etc.
- Automotive: Powersupplyfor car stereo and air conditioner.



1 From A



1 From C

PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
23914	TRV-12VDC-SC-CD	TTI	TTI Relay	16A 125VAC/30VDC	TRV	1 From C	24VDC	CUL	22.0*16.6*11.0mm
23117	TRV-24VDC-SC-AL	TTI	TTI Relay	16A 125VAC/30VDC	TRV	1 From A	24VDC	CUL	22.0*16.6*11.0mm
23118	TRV-24VDC-SC-CD	TTI	TTI Relay	16A 125VAC/30VDC	TRV	1 From C	24VDC	CUL	22.0*16.6*11.0mm
23119	TRV-48D-SC-AL0.25W	TTI	TTI Relay	16A 125VAC/30VDC	TRV	1 From A	48VDC	CUL	22.0*16.6*11.0mm
23120	TRV-48VDC-SC-AL	TTI	TTI Relay	16A 125VAC/30VDC	TRV	1 From A	48VDC	CUL	22.0*16.6*11.0mm
23121	TRV-9VDC-SC-CD0.45W	TTI	TTI Relay	16A 125VAC/30VDC	TRV	1 From C	9VDC	CUL	22.0*16.6*11.0mm




MAINFEATURES

- Longlifeandhighreliability
- Strongconstructionforvibrationandshock
- Approximatelythousandsforkindsareavailable dependingonthecombinationofterminals, covers, contactratings,coiletc.
- Moldedmaterial:AllUL94V-0

APPLICATIONS

- Powerstationcontrolequipments
- Transportations
- Refrigerators
- Coiloperatedmachines
- Officemachines
- Buildingequipments
- Medicalequipments
- Amusementdevices,etc.



PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
23122	TRY-110A-P-4C	TTI	TTI Relay	5A 250VAC/30VDC	TRY	4PDT	110VAC	UL	27.3*21.0*35.5mm
23123	TRY-110A-S-2C	TTI	TTI Relay	7A 250VAC/30VDC	TRY	DPDT	110VAC	UL	27.3*21.0*35.5mm
23124	TRY-12D-P-2C	TTI	TTI Relay	7A 250VAC/30VDC	TRY	DPDT	12VDC	UL	27.3*21.0*35.5mm
23125	TRY-12D-S-2C	TTI	TTI Relay	7A 250VAC/30VDC	TRY	DPDT	12VDC	UL	27.3*21.0*35.5mm
23126	TRY-12D-S-4C	TTI	TTI Relay	5A 250VAC/30VDC	TRY	4PDT	12VDC	UL	27.3*21.0*35.5mm
23127	TRY-220A-S-2C	TTI	TTI Relay	7A 250VAC/30VDC	TRY	DPDT	220VAC	UL	27.3*21.0*35.5mm
23128	TRY-24A-S-2C	TTI	TTI Relay	7A 250VAC/30VDC	TRY	DPDT	24VAC	UL	27.3*21.0*35.5mm
23130	TRY-24D-P-2C	TTI	TTI Relay	7A 250VAC/30VDC	TRY	DPDT	24VDC	UL	27.3*21.0*35.5mm
23131	TRY-24D-P-4C	TTI	TTI Relay	5A 250VAC/30VDC	TRY	4PDT	24VDC	UL	27.3*21.0*35.5mm
23132	TRY-24D-S-2C	TTI	TTI Relay	7A 250VAC/30VDC	TRY	DPDT	24VDC	UL	27.3*21.0*35.5mm
23133	TRY-24D-S-4CL	TTI	TTI Relay	5A 250VAC/30VDC	TRY	4PDT	24VDC	UL	27.3*21.0*35.5mm


NEC-PCB繼電器 NEC-PCBRelays

詳細產品規格--請點擊www.100y.com.tw



FEATURES

- Compactandlightweight
- 2formCcontactarrangement
- Lowpowerconsumption
- Reducedmountingspace:15mm×7.5mm
- High-breakdownvoltageofcoiltocontacts:1500Vac,2500V (risetime:2 μ s,falltime:10 μ s)
- CapableofHigh-powerswitching:700Vac,4.2A,4timesin caseofaccident
- ULrecognized(E73266).CAScertified(LR46266)

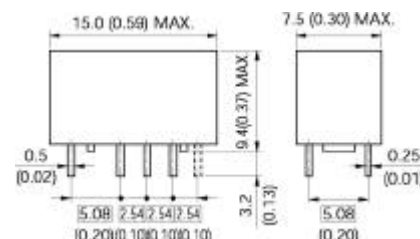


PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
22054	EC2-5NJ	NEC	"NEC" 繼電器	60W,125VA220Vdc,250Vac2A	EC2	1 From C	5VDC	UL,CSA	15*7.5*9.4mm



RELAYS & SOLENIIDS

NAIS-PCB繼電器 NAIS-PCB Relays

詳細產品規格--請點擊www.100y.com.tw



Features

- Controls low-level analog signals: PhotoMOS relays feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.
- Control with low-level input signals
- Controls various types of loads such as relays, motors, lamps and solenoids.
- Optical coupling for extremely high isolation: Unlike mechanical relays, the PhotoMOS relay combines LED and optoelectronic device to transfer signals using light for extremely high isolation.
- Eliminates the need for a counter electromotive force protection diode in the drive circuits on the in-pipe outside
- Stable on-resistance
- Low-level off-state leakage current
- Eliminates the need for a power supply to drive the power MOSFET: A power supply used to drive the power MOSFET is unnecessary because of the built-in optoelectronic device. This results in easy circuit design and small PCB board area.
- Low thermal electromotive force (Approx. 1 μ V)

PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
16848	AQV202	NAIS	PhotoMOS RELAYSDIP-6P	1 Form A	AQV	1-Channel (Form A)	60V	RU, CSA, TUV	8.8*6.4*3.9



FEATURES

- 2 Form C contact
- High sensitivity-200mW nominal operating power
- High breakdown voltage: 1500V FCC surge between open contacts
- DIP-2C type matching 16pin IC socket
- Sealed construction



PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	OutlineLxWxH
22166	DS2Y-D-DC12V	NAIS	MINIATURE RELAY	0.3A/125Vac/0.3A/110Vdc	DS2Y	2 Form C	12Vdc	20*9.3*9.9



Features

- Small size for increased packaging density
- Sensitive-Very low operating power
- Simple mechanism for stable quality-only 7 piece parts
- DIP matching 16pin IC socket
- Contact capacity-1A/125VAC, 2A/30VDC




PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
13249	HB2E-DC12V	NAIS	PCB 繼電器	2A/30VDC	HB2E	1C, 2C	(DC) 5, 12, 24, 48V	UL, CSA	20*11*16



FEATURES

- Space saver-Flat series and vertical series
- High contact reliability due to bifurcated contacts
- 2C: 5A/250VAC, 4C: 5A/125VAC, 4A/250VAC
- Latching types available
- Low operating power
- 2C: 200mW, 4C: 400mW (Single side stable)




PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety
10185	NC2D-JP-DC24V	NAIS	繼電器	5A/250V, 1/10HP/250V	NC2D	2PDT	24VDC	UL, CSA



FEATURES

- Power types added to DS relay series
- High switching capacity: 1a: 8A/250VAC/1a1b, 2a: 5A/250VAC
- High sensitivity: 190mW pick-up power
- High contact welding resistance
- Latching types available
- High breakdown voltage 3,000Vrms between contacts and coil
- 1,000Vrms between open contacts Meeting FCC Part 68
- Sealed types are standard mm in




PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
19033	DSF1-DC12V	NAIS	High Breakdown Voltage Capacity	5A/250V	DS-Relay	1c, 2c, 4c	DC12V	UL, CSA	20*9.9*9.8



PartDescription:

Polarized high density relay, 2 poles single throw circuit, 24VDC coil voltage, contact current rating AC4A, 125/250VAC, contact current rating DC3A, 30VDC, printed circuit board mounting, general relay

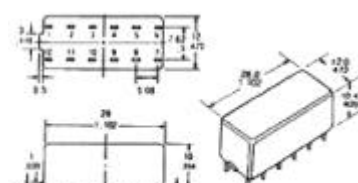

PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
17934	S2EB-24DC	NAIS	PCB 繼電器	4A/20HP/125, 250VAC 3A/30VDC	S2EB	2A2B	24VDC	UL, CSA	27*12*9.5mm

詳細產品規格--請點擊www.100y.com.tw



RELAYS & SOLENIIDS

OEG-PCB繼電器 OEG-PCBRelays

詳細產品規格--請點擊www.100y.com.tw



OMI/OMIHSeriesFeatures

- MeetUL508,VDE0435andSEMKO requirements.
- 1FormAand1FormCcontactarrangements.
- Immersioncleanable,sealedversionavailable.
- Meet5,000Vdielectricvoltagebetweencoil andcontacts.
- Meet10,000Vsurgevoltagebetweencoiland contacts(1.2/50μs).




PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
14875	OMI-SS-212DM	OEG	PCB繼電器	5A250VAC/28VDC	OMI-SS	1 Form A, 1 Form C	12Vdc	CSA,UR,VDE,S	29.2*12.8*20.6
23942	OMI-SS-212L	OEG	PCB繼電器	5A250VAC/28VDC	OMI-SS	1 Form A, 1 Form C	12Vdc	CSA,UR,VDE,S	29.2*12.8*20.6
23963	OMI-SS-224DM	OEG	PCB繼電器	5A250VAC/28VDC	OMI-SS	1 Form A, 1 Form C	24Vdc	CSA,UR,VDE,S	29.2*12.8*20.6
23943	OMI-SS-224L	OEG	PCB繼電器	5A250VAC/28VDC	OMI-SS	1 Form A, 1 Form C	24Vdc	CSA,UR,VDE,S	29.2*12.8*20.6
14877	OMIH-SS-112L	OEG	PCB繼電器	16A 240VAC/240DC	OMIH-SS	1 Form A, 1 Form C	12Vdc	CSA,UR,VDE	29.2*12.8*20.6
23945	OMIH-SS-124L	OEG	PCB繼電器	16A 240VAC/240DC	OMIH-SS	1 Form A, 1 Form C	24Vdc	CSA,UR,VDE	29.2*12.8*20.6



Features

- MeetUL508,CSAandTUVrequirements.
- 1FormAand1FormCcontactarrangements.
- Immersioncleanable,sealedversionavailable.
- Meet5,000Vdielectricvoltagebetweencoilandcontacts.
- Meet10,000Vsurgevoltagebetweencoilandcontacts(1.2/50μs).
- QuickConnectTerminaltypeavailable(OZF).
- ULTV-8ratingavailable(OZT).



PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
23971	OZ-SS-112LM1	OEG	PCB繼電器	16A 240VAC	OZ-SS	1 Form A	12Vdc	CSA,UR,TUV	29.2*12.8*20.6mm
23974	OZ-SS-124LM1	OEG	PCB繼電器	16A 240VAC	OZ-SS	1 Form A	24Vdc	CSA,UR,TUV	29.2*12.8*20.6mm

OKITA-PCB繼電器 OKITA-PCBRelays

詳細產品規格--請點擊www.100y.com.tw







Characteristics:

- Highspeedasanojectforhighfrequency
- Bestfortheasterwhichneedsspeed

Properties:

- Environmental:Ambienttemperature: -10to+60degreesCelsius
- Shock:20G(0to2kHz,1.5mm maximum)
- Vibration:30G(11ms,1/2sinewave)

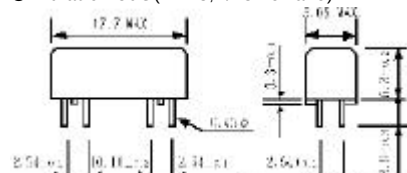

詳細產品規格--請點擊www.100y.com.tw

PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	OutlineLxWxH
13262	HFS-1A-05	OKITA	水銀繼電器 (OKITA)	100Vdc/0.5A	HFSS	1A	5V/31.3mA	20*5*5mm
21953	HFSS-1A-05WL	OKITA	水銀繼電器 (OKITA)	100Vdc/0.5A	HFS	1A	5V/31.3mA	17.7*5.05*5.3mm
12601	MTTP-102S	OKITA	PCB 繼電器	2 A	MTTP	1FormC	12VDC	25*8*8mm

TOWARD-PCB繼電器 TOWARD-PCBRelays

詳細產品規格--請點擊www.100y.com.tw



PartNo.	ProductNo.	Manuf.	Description	ContactRating	CoilVoltage
23904	P-24	TOWARD	繼電器	1A30VDC,0.5A125VAC	5Vdc

詳細產品規格--請點擊www.100y.com.tw




RELAYS & SOLENIIDS

鐵殼繼電器

TELEDYNE-鐵殼繼電器

TELEDYNE Metal Can Relays




- All welded construction.
- Unique uni-framed design providing high magnetic efficiency and mechanical rigidity.
- High force/mass ratios for resistance to shock and vibration.
- Advanced cleaning techniques provide maximum assurance of internal cleanliness.
- Precious metal alloy contact material with gold plating assures excellent high current and dry circuit switching capabilities.



PartNo.	ProductNo.	Manuf.	Description	Vin 驅動電壓	Type	Contact Resistance	Packing	Coil Resistance
27696	712-55	TELEDYNE	COMMERCIAL/INDUSTRIAL RELAYS	5Vdc	712	0.15Ω	TO-5	2 Form C (DPDT)



- High repeatability.
- Broader bandwidth.
- Metal enclosure for EMI shielding.
- Ground pin option to improve case grounding.
- High isolation between control and signal paths.
- Highly resistant to ESD.



PartNo.	ProductNo.	Manuf.	Description	Vin 驅動電壓	Type	Contact Resistance	Packing	Coil Resistance
21377	RF303-5	TELEDYNE	High Repeatability TO-5 Relays	5Vdc	RF-303	150mΩ	TO-5	100Ω ±20%

功率繼電器

RAYEX-功率繼電器

RAYEX Solder Power Relays




LB2

FEATURES


- High performance power relay
- PCB terminal and solder lug terminal and flanged case are available
- LED version are available
- UL, CUL, TUV, and CE approved
- Using at control equipment, vending machine, cooking appliances, office machine, domestic appliances, etc.



LB2H




LB4H

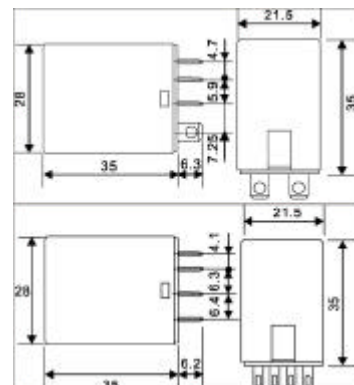

PartNo.	ProductNo.	Manuf.	Description	Contact Rating	Type	Contact Arrangement	Coil Voltage	Recognized Safety	Outline LxWxH
2280	LB2-110AS	RAYEX	Power 繼電器	12A 240Vac/12A 30Vdc	LB2	2PDT	110Vac	TUV,UL,CUL	28.5*21.5*35
8191	LB2-12DS	RAYEX	Power 繼電器	12A 240Vac/12A 30Vdc	LB2	2PDT	12Vdc	TUV,UL,CUL	28.5*21.5*35
4613	LB2-220AS	RAYEX	Power 繼電器	12A 240Vac/12A 30Vdc	LB2	2PDT	220Vac	TUV,UL,CUL	28.5*21.5*35
2279	LB2-24DS	RAYEX	Power 繼電器	240Vac/12A 30Vdc/12A	LB2	2PDT	24Vdc	TUV,UL,CUL	28.5*21.5*35
2907	LB2H-110AS	RAYEX	Power 繼電器	10A 240Vac/10A 30Vdc	LB2H	2PDT	110Vac	TUV,UL,CUL	28.5*21.5*34.2
3180	LB2H-12DS	RAYEX	Power 繼電器	10A 240Vac/10A 30Vdc	LB2H	2PDT	12Vdc	TUV,UL,CUL	28.5*21.5*34.2
2290	LB2H-220AS	RAYEX	Power 繼電器	10A 240Vac/10A 30Vdc	LB2H	2PDT	220Vac	TUV,UL,CUL	28.5*21.5*34.2
2283	LB2H-24DS	RAYEX	Power 繼電器	240Vac/10A 30Vdc/10A	LB2H	2PDT	24Vdc	TUV,UL,CUL	28.5*21.5*34.2
4754	LB4H-110A	RAYEX	Power 繼電器	5A 240Vac/5A 30Vdc	LB4H	4PDT	110Vac	TUV,UL,CUL	28.5*21.5*34.2
6092	LB4H-12D	RAYEX	Power 繼電器	240Vac/5A 30Vdc/5A	LB4H	4PDT	12Vdc	TUV,UL,CUL	28.5*21.5*34.2
2292	LB4H-220A	RAYEX	Power 繼電器	5A 240Vac/5A 30Vdc	LB4H	4PDT	220Vac	TUV,UL,CUL	28.5*21.5*34.2
3605	LB4H-24D	RAYEX	Power 繼電器	5A 240Vac/5A 30Vdc	LB4H	4PDT	24Vdc	TUV,UL,CUL	28.5*21.5*34.2
12004	LB2HN110AS	RAYEX	Power 繼電器含發光二極體	10A 240Vac/10A 30Vdc	LB2HN	2PDT	110Vac	TUV,UL,CUL	28.5*21.5*34.2


OMRON-功率繼電器

OMRON Solder Power Relays



G7T-1112SDC24V

- Omron relay I/O blocks provide high performance switching used with controllers from any manufacturer
 - P7TF bases let you mix and match G7T relays and G3T ASSRs so long as the coil voltage matches the base voltage
- Standards:** UL, CSA, CE
Output relay: 5A, 24VDC



詳細產品規格--請點擊www.100y.com.tw



勝特力科技有限公司

●服務專線: 886-3-5753170
 ●24小時傳真: 886-3-5753172
 ●E-mail: e100y.sale@msa.hinet.net

WWW.100Y.COM.TW

深圳百年電子有限公司

●服務專線: 86-755-83289224
 ●24小時傳真: 86-755-83640655
 ●Email: 100y@163.com


29-20

RELAYS & SOLENIIDS

PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineWxDxH
12553	G7T-1112S	OMRON	Power繼電器	5A	G7T	1 A	24VDC	UL, CSA, CE	29*10*32mm




- Arcbarrierequipped
- Highdielectricstrength(2,000VAC)
- Longdependableservice lifeassuredbyAgCdOcontacts
- Choosemodelswithsingleorbifurcatedcontacts, LEDindicator, diodesurge suppression, push-to-testbutton, orRCcircuit
- AllmodelsmeetULandCSA approvals; VDE, LR, andSEV approvedversionsareavailable



PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
17606	LY2N-D2-24VDC	OMRON	線圈突波吸收用二極體型有指示燈 POWER開關之小型泛用繼電器	1/2HP 120VAC/12A240Vac	LY2N-D2	2極	24Vdc	UL, CAS, CE	36*28*21.5




- POWER 開關之小型泛用繼電器
- 取得UL, CSA, SEV及LR, VDE規格認定及電器用品取締法標準品
 - 電弧遮斷標準裝備
 - 耐電壓 2000V
 - 追加二極體內藏型
 - 2極額定操作電壓AC (100/110, 110/120, 200/220, 220/240) DC(100/110)

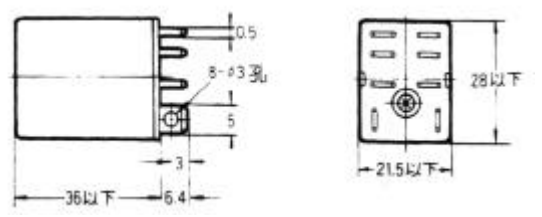

PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
17161	LY2N-24VDC	OMRON	有指示燈POWER焊線式繼電器	10A/110Vac	LY2N	2PDT	24Vdc	UL, CSA, SEV, LR, VDE	28*21.5*36
20299	LY2N-AC110/120V	OMRON	有指示燈POWER焊線式繼電器	10A/110Vac	LY2N	2PDT	AC 110V/120V	UL, CSA, SEV, LR, VDE	28*21.5*36




- POWER 開關之小型泛用繼電器
- 取得UL, CSA, SEV及LR, VDE規格認定及電器用品取締法標準品
 - 電弧遮斷標準裝備
 - 耐電壓2000V
 - 追加二極體內藏型
 - 極額定操作電壓AC (100/110, 200/220)

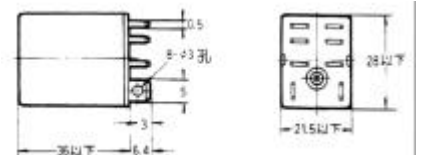

PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
19022	LY3N-24VDC	OMRON	有指示燈POWER焊線式繼電器	10A/110Vac	LY3N	3PDT	24Vdc	UL, CSA, SEV, LR, VDE	30*26.7*35
11445	LY4NJ-AC110	OMRON	Power 繼電器	10A/240VAC-10A/28VDC	LY4NJ	4PDT	100/110VAC	IEC255	40*26.5*35




- 額定操作電 (AC100/110, AC110/120, AC200/220, AC220/240) (DC100/110)
- 取得UL, CSA認定及電氣用品取締法標準品
- 3極、4極 電弧標準裝備
- 耐電壓AC2000V



PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
24927	MY4NJ-AC110V	OMRON	Power 繼電器	5A 240Vac/5A 28Vdc	MY4NJ	4PDT	220VAC	CSA, CE	36*27*20
13344	MY4NJ-AC220V	OMRON	Power 繼電器	5A 240Vac/5A 28Vdc	MY4NJ	4PDT	24VAC	CSA, CE	36*27*20
10710	MY4NJ-AC24-OMB	OMRON	Power 繼電器	5A 240Vac/5A 28Vdc	MY4NJ	4PDT	12VDC	CSA, CE	36*27*20
23292	MY4NJ-DC12-OMZ	OMRON	Power 繼電器	5A 240Vac/5A 28Vdc	MY4NJ	4PDT	24VDC	CSA, CE	36*27*20
11787	MY4NJ-DC24-OMB	OMRON	Power 繼電器	5A 240Vac/5A 28Vdc	MY4NJ	4PDT	24VDC	CSA, CE	36*27*20




- 額定操作電 (AC100/110, AC110/120, AC200/220, AC220/240) (DC100/110)
- 取得UL, CSA認定及電氣用品取締法標準品
- 3極、4極 電弧標準裝備
- 耐電壓AC2000V



PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
15287	MY2NJ-AC110V	OMRON	Power 繼電器	5A 240Vac/ 5A28Vdc	MY2NJ	2PDT	110VAC	CSA, CE	36*27*20
16123	MY2NJ-AC220V	OMRON	Power 繼電器	5A 240Vac/ 5A28Vdc	MY2NJ	2PDT	220VAC	CSA, CE	36*27*20
11856	MY2NJ-AC24-OMB	OMRON	Power 繼電器	5A 240Vac/ 5A28Vdc	MY2NJ	2PDT	24VAC	CSA, CE	36*27*20
25936	MY2NJ-DC12V-OMB	OMRON	Power 繼電器	5A 240Vac/ 5A28Vdc	MY2NJ	2PDT	12VDC	CSA, CE	36*27*20
14977	MY2NJ-DC24V	OMRON	Power 繼電器	5A 240Vac/ 5A28Vdc	MY2NJ	2PDT	24VDC	CSA, CE	36*27*20
11857	MY2NJ-DC6-OMB	OMRON	Power 繼電器	5A 240Vac/ 5A28Vdc	MY2NJ	2PDT	6VDC	CSA, CE	36*27*20



- Arcbarrierequipped
- Highdielectricstrength(2,000VAC)
- Longdependableservice lifeassuredbyAgCdOcontacts
- Choosemodelswithsingleorbifurcatedcontacts, LEDindicator, diodesurge suppression, push-to-testbutton, orRCcircuit
- AllmodelsmeetULandCSA approvals; VDE, LR, andSEV approvedversionsareavailable




RELAYS & SOLENIIDS

PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
14788	LY4NJ-AC220V	OMRON	Power 繼電器	10A/240VAC-10A/28VDC	LY4NJ	4PDT	200/220VAC	IEC255	40*26.5*35




- Increased reliability through automated production
- Multiple features available, including LED indicator, test button, bifurcated contacts, built-in diode and CR (surge suppression)
- Max. switching current: two-pole/10A, four-pole/5A
- Environment-friendly cadmium-free contacts
- Built-in operation indicator and nameplate is standard



PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
17605	MY4N-24VDC	OMRON	小型有顯示燈Power Relay	5A 250VAC/ 5 A30VDC	MY4N	4極	24Vdc	CSA,CE	36*28*21.5




- Arc barrier equipped
- High dielectric strength (2,000VAC)
- Long dependable service life assured by AgCdO contacts
- Choose models with single or bifurcated contacts, LED indicator, diode surge suppression, push-to-test button, or RC circuit
- All models meet UL and CSA approvals; VDE, LR, and SEV approved versions are available

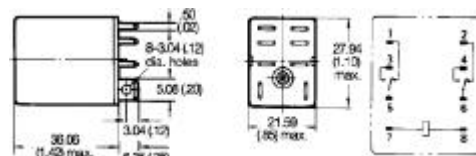


PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
27589	LY2J-24VDC	OMRON	有指示燈POWER焊線式繼電器	10A/110Vac	LY2J	2PDT	24Vdc	JL, CSA, SEV, LR, VDE	20.5*27*41.6
27591	LY2J-AC220V	OMRON	有指示燈POWER焊線式繼電器	10A/110Vac	LY2J	2PDT	220Vac	JL, CSA, SEV, LR, VDE	20.5*27*41.6

IDEC-功率繼電器 IDEC Solder Power Relays


詳細產品規格--請點擊www.100y.com.tw




- Key features of the RH series include:**
- Compact midsize saves space
 - High switching capacity (10A)
 - Choice of blade or PCB style terminals
 - Relay options include indicator light, check button, and top mounting bracket
 - DIN rail, surface, panel, and PCB type sockets available for a wider range of mounting applications

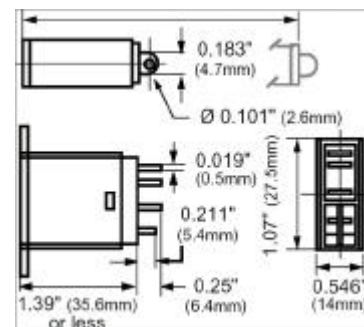

PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
19780	RH1B-L-AC120V	idc	5脚 Power 繼電器	240VAC/10A, 30VDC/10A	RH1B-L	SPDT	AC120V	UL, CE, SR, TUV	27*14*35mm




RH1B Series:
Veris offers the idec RH1B Series, a SPDT blade-style socket relay for DIN rail mounting. All models are available in three coil voltage choices: 24VAC, 24VDC, or 120VAC, with contacts rated for 10A (resistive). RH1B-L models have the added benefit of a non-board status LED to provide local indication, especially useful during commissioning and troubleshooting. When used with SH1B-05 socket, these relays mount to standard DIN rails. A spring-loaded removal clip is included with each socket.



PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
14131	RH1B-U-AC24V	idc	5脚 Power 繼電器	240VAC/10A, 30VDC/10A	RH1B-U	SPDT	AC24V	UL, CE, SR, TUV	27*18*36mm



RH系列為大容量小形功率型繼電器，其接點容量10A，等效於RR系列繼電器。與和泉微型繼電器具有相同的外形尺寸。適合於緊湊型系統設計和小型控制設備安裝。



PartNo.	ProductNo.	Manuf.	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
23557	RH1B-U-DC12V	idc	5脚 Power 繼電器	240VAC/10A, 30VDC/10A	RH1B-U	SPDT	DC24V	UL, CE, SR, TUV	27*14*35mm
14292	RH1B-U-DC24V	idc	5脚 Power 繼電器	240VAC/10A, 30VDC/10A	RH1B-U	SPDT	DC24V	UL, CE, SR, TUV	27*14*35mm



勝特力科技有限公司

- 服務專線: 886-3-5753170
- 24小時傳真: 886-3-5753172
- E-mail: e100y.sale@msa.hinet.net


WWW.100Y.COM.TW

深圳百年電子有限公司


- 服務專線: 86-755-83289224
- 24小時傳真: 86-755-83640655
- Email: 100y@163.com

29-22

RELAYS & SOLENIIDS




RH2B Series: Verisofferstheidec RH2B Series, a DPDT blade-style socket relay for DIN rail mounting. All models are available in three coil voltage choices; 24VAC, 24VDC, or 120VAC, with contacts rated for 10A (resistive). RH2B-UL models have the added benefit of an on-board status LED to provide local indication, especially useful during commissioning and troubleshooting. When used with SH2B-05 socket, these relays mount to standard DIN rails. A spring-loaded removal clip is included with each socket.



PartNo.	ProductNo.	Manuf	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
19514	RH2B-U-AC120V	idec	8脚繼電器	110VAC/30VDC, 10A 220VDC/7.5A	RH2B-U	DPDT	AC120V	UL, CSA, TUV	35.6*21*27.5
16655	RH2B-U-DC24	idec	8脚繼電器	110VAC/30VDC, 10A 220VDC/7.5A	RH2B-U	DPDT	DC24V	UL, CSA, TUV	35.6*21*27.5
17549	RH2B-ULAC110	idec	功率型繼電器	110VAC/30VDC, 10A 220VDC/7.5A	RH2B-UL	DPDT	AC110V	UL, CSA, TUV	35.6*21*27.5
17552	RH2B-ULAC220	idec	功率型繼電器	110VAC/30VDC, 10A 220VDC/7.5A	RH2B-UL	DPDT	AC220V	UL, CSA, TUV	35.6*21*27.5
16817	RH2B-ULAC24	idec	8脚帶燈繼電器	240VAC/30VDC, 10A	RH2B-UL	DPDT	DC24V	UL, CSA, TUV	35.6*21*27.5
17546	RH2B-ULD12	idec	功率型繼電器	110VAC/30VDC, 10A 220VDC/7.5A	RH2B-UL	DPDT	DC12V	UL, CSA, TUV	35.6*21*27.5
17545	RH2B-ULDC24	idec	功率型繼電器	110VAC/30VDC, 10A 220VDC/7.5A	RH2B-UL	DPDT	DC24V	UL, CSA, TUV	35.6*21*27.5



Ferrite Beads are the most common EMI suppression products.
 ● Computer Products. (Music cards, Main Boards...etc.)
 ● Communication Products.
 ● Electronic automatic equipment...etc.

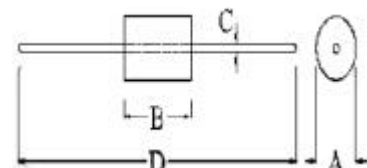


PartNo.	ProductNo.	Manuf	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
19473	RH4B-U-AC24V	idec	扁脚插座繼電器	110VAC/30VDC, 10A 220VAC, 7.5A	RH4B-U	4PDT	AC24V	UL, CSA, TUV	35.6*41*27
27767	RH4B-UL-DC24V	idec	扁脚插座繼電器	110VAC/30VDC, 10A 220VAC, 7.5A	RH4B-UL	4PDT	DC24V	UL, CSA, TUV	35.6*41*27



Key features of the RY series include:

- Compact miniature sizes save space
- 2PDT and 4PDT models, available with bifurcated crossbar contacts, ensure reliable low-current switching for dry circuit applications
- Choice of plug-in/solder or PCB type terminals
- Options include check button for test operation and indicator lights on 4PDT models
- DIN rail, surface, panel, and PCB type sockets available for a wide range of mounting applications



PartNo.	ProductNo.	Manuf	Description	ContactRating	Type	ContactArrangement	CoilVoltage	RecognizedSafety	OutlineLxWxH
17553	RY2S-UDC12	idec	Power 繼電器	110VAC/30VDC, 3A 220VAC, 3A	RY2S-U	DPDT	DC12V	UL, CSA, TUV	35.6*14*27.5
17554	RY2S-UDC24	idec	Power 繼電器	110VAC/30VDC, 3A 220VAC, 3A	RY2S-U	DPDT	DC24V	UL, CSA, TUV	35.6*14*27.5

MK-系列8角和11角繼電器


OMRON-MK2P-18角圓形繼電器

OMRON-MK2P-18-Pin Plug Relays

詳細產品規格--請點擊www.100y.com.tw



- 開閉容量10A(AC250V, DC28V)高容量。
- 標準品動作表示機構內藏。
- 標準品UL, CSA, SEV, DEMKO, NEMKO, SEMKO, VDE/IEC規格(TUV認定取得)

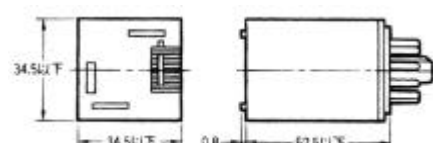

PartNo.	ProductNo.	Description	Coil rating	Contact rating	Contact form
4338	MK2P-I-110VAC	8角圓形繼電器	110Vac	250Vac, 28Vdc/10A	DPDT
4867	MK2P-I-220VAC	8角圓形繼電器	220Vac	250Vac, 28Vdc/10A	DPDT
4337	MK2P-I-24VDC	8角圓形繼電器	24Vdc	250Vac, 28Vdc/10A	DPDT

OMRON-BMK3P-I11角圓形繼電器


OMRON-BMK3P-I11-Pin Plug Relays

詳細產品規格--請點擊www.100y.com.tw



Exceptionally Reliable General-purpose Relay Features Mechanical Indicator/ Push Button

- Breaks relatively large load currents despite small size.
- Long life (minimum 100,000 electrical operations) assured by silver contacts.
- Built-in operation indicator (Mechanical, LED), push button, diode surge suppression, varistor surge suppression.
- Conforming to CENELEC standards.
- Standard models are UL, CSA, SEV, DEMKO, NEMKO, SEMKO, TUV (IEC), and VDE.

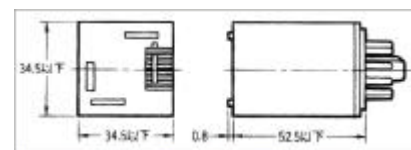

詳細產品規格--請點擊www.100y.com.tw



勝特力科技有限公司

- 服務專線: 886-3-5753170
- 24小時傳真: 886-3-5753172
- E-mail: e100y.sale@msa.hinet.net

WWW.100Y.COM.TW

深圳百年電子有限公司

- 服務專線: 86-755-83289224
- 24小時傳真: 86-755-83640655
- Email: 100y@163.com

29-23

RELAYS & SOLENIIDS


PartNo.	ProductNo.	Manuf.	Description	Coil rating	Contact rating	Contact form
4869	MK3P-I-110VAC	OMRON	11 Pins Coil繼電器	250Vac,28Vdc/10A	110Vac	3PDT
12473	MK3P-I-12VDC	OMRON	11 Pins Coil繼電器	250Vac,28Vdc/10A	12Vdc	3PDT
4870	MK3P-I-220VAC	OMRON	11 Pins Coil繼電器	250Vac,28Vdc/10A	220Vac	3PDT
12786	MK3P-I-24VAC	OMRON	11 Pins Coil繼電器	250Vac,28Vdc/10A	24Vdc	3PDT
4868	MK3P-I-24VDC	OMRON	11 Pins Coil繼電器	250Vac,28Vdc/10A	24Vdc	3PDT

TOWARD-MK28角圓形繼電器 TOWARD-MK28PlugRelays

詳細產品規格--請點擊www.100y.com.tw



- Features**
- Highswitchingcapacity.
 - Ruggedconstructionforthoroughapplications.
 - Within LEDavailable, Testingbutton.




PartNo.	ProductNo.	Manuf.	Description	Coil rating	Contact rating	Contact form
15905	BMK2-110A	TOWARD	8角圓形Coil 繼電器	110Vac	5A220Vac/28Vdc	2From C
15903	BMK2-12D	TOWARD	8角圓形Coil 繼電器	12Vac	5A220Vac/28Vdc	2From C
15906	BMK2-200/240A	TOWARD	8角圓形Coil 繼電器	220Vac	5A220Vac/28Vdc	2From C
15907	BMK2-240A	TOWARD	8角圓形Coil 繼電器	240Vac	10A 250Vac/28Vdc	2From C
15904	BMK2-24D	TOWARD	8角圓形Coil 繼電器	24Vac	5A220Vac/28Vdc	2From C

繼電器角座 8-Pin/11-Pin 圓形繼電器底座 8-Pin and 11-Pin Track Mounted Sockets


詳細產品規格--請點擊www.100y.com.tw



- Eachunitprovidesfivefield-selectabletimerangesusingthefrontpaneltimerange selector
- ON-delayorSignalOFF-delayfromclutchinputareavailable
- Neontimingindicatorandmovingpointershowstatus
- Panelmountingadapters,sockets,protectivecoverandotheraccessoriesmaybe orderedseparately




PartNo.	ProductNo.	Manuf.	Description	Pins	重量	L*W*H(mm)
11970	P2CF-11	OMRON	11 Pins 圓繼電器腳座	11P	70g	70*50*25



PartNo.	ProductNo.	Manuf.	Description	Pins	重量	L*W*H(mm)
4871	PF083A-L	OMRON	8 Pins圓繼電器腳座	8 P	34g	52*41*21
4339	PF113A-L	OMRON	11Pins圓繼電器腳座	11P	47g	52*42.8*31



- Features:**
- Fieldselectabletimerangesfrom0.05secondsto300hours.
 - Choose6-or2-functionmodelstofitmostapplications
 - WiderangeACsupplyvoltage(100-240VAC)fitmost applicationsandreducesparepartsinventories
 - Short(80mm)panelmountingdepthwithsocketallowsformore space-efficientcontrolpanel design
- Specifications:**
- Controloutputtype:DPDTrelay
 - Supplyvoltage:100-240VAC/24VACor12VDCor24VDC
 - Maximumload:5A@250VAC
 - Timingfunctionsfor11-pinround:ON-delay,Repeatcycle,signal ON/OFFdelay,signalOFFdelay,interval
 - TimingFunctionsfor8-pinround:ON-delay,interval

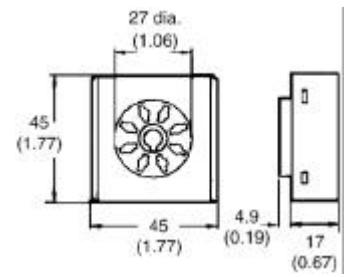

PartNo	ProductNo.	Manuf.	Description	Pins	重量	L*W*H(mm)
11040	P3G-08	OMRON	圓繼電器腳座 Socket Back Mounting, for use with Y92F-30 Mounting Adapter Bottom Screw Terminals	8 P	40g	48*40*20

方形繼電器底座 General Track Mounted Sockets

詳細產品規格--請點擊www.100y.com.tw

詳細產品規格--請點擊www.100y.com.tw



RELAYS & SOLENIIDS

 PTF-08A	 PTF14A
 PY-080	 PY-140
 PY14	 PYF-08A
 SY2S-05A	 PYF-14A
 14F-2Z-C2	

詳細產品規格--請點擊www.100y.com.tw

PartNo.	ProductNo.	Manuf.	Description	Pins	重量	L*W*H(mm)
27369	14F-2Z-C2	OMRON	DIN 繼電器腳座	8 P	90g	78*32*28
2904	PTF-08A		繼電器腳座 8P	8 P		71*45*27
11444	PTF14A		繼電器腳座14P	14P		29*22*12.2
8446	PY-080		DIP繼電器腳座/8P	8 P	30g	29*21.8*12.2
10353	PY-140		DIP繼電器腳座/14P	14P	30g	29*21.8*12.2
11324	PY14	OMRON	繼電器腳座/14P	14P	10g	21*29*19
2555	PYF-08A		方型繼電器腳座 8 P	8 P	50g	71*22*30.5
2027	PYF-14A		方型繼電器腳座14P	14P	80g	71*29*30.5
17555	SY2S-05A	id ec	DIN軌道安裝插座	8P-刀型		64*20*25

磁保持繼電器 Latching Relay



- Highswitchingcapacity:60A
- Nopowerconsumptionwhenlatchingmagnetichold.
- Noadditionalheatingcausedbydrivingcoil.
- Highresistancetovibrationandshock.
- Maintenanceofcontactpositionwhendrivingpowerincaseofstop.

詳細產品規格--請點擊www.100y.com.tw

PartNo.	ProductNo.	Manuf.	Description	接點形態	Max.SetVolt.	ContactRatingA/V	CoilVolt.	Min.ResetVolt	LxWxH(mm)
16031	BT60L-12VDC-A	TOWARD	磁保持繼電器	1Form A / 1 Make	60A/250V	9V	12VDC	4.8V	39*30.5*18

電磁閥 TTI 電磁閥 TTISolenoids

詳細產品規格--請點擊www.100y.com.tw



RELAYS & SOLENIIDS



詳細產品規格--請點擊www.100y.com.tw





Part No.	ProductNo.	Manuf.	Description	電壓(V)	高度(m/m)	外徑(m/m)(φ)	軸徑(m/m)(φ)
19794	TST-1130P-12V	TTI	Open Frame Solenoid Push Type	12V	30mm	9mm	4 mm
18023	TST-1130P-24V	TTI	Open Frame Solenoid Push Type	24V	30mm	9mm	4 mm

固態繼電器





表面型AC驅動/AC負載固態繼電器

Surface Mounting Power AC To AC Solid State Relays



詳細產品規格--請點擊www.100y.com.tw



Part No.	ProductNo.	Manuf.	Description	Irms負載電流	Vrms負載電壓	SwitchingType	Vin
8450	KL20C10AX	KYOTTO	固態繼電器	10A	24-280VAC	Zero-Cross	80-280VAC
6337	KL20C25AX	KYOTTO	固態繼電器	25A	24-280VAC	Zero-Cross	80-280VAC
18336	KL20C40AX	KYOTTO	固態繼電器	40A	24-280VAC	Zero-Cross	80-280VAC



Part No.	ProductNo.	Manuf.	Description	Irms負載電流	Vrms負載電壓	SwitchingType	Vin
13689	KL40C25AX	KYOTTO	固態繼電器	25A	48-480VAC	ZERO-CROSS	80-280VAC

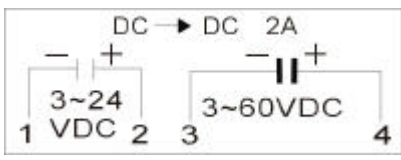

- Features:
- SortieACsynchro:12-280VAC-40A
 - Possibilitede protectionIp20enoption: Capot1K460000
 - Adapteatouttypedecharges

SC844910

詳細產品規格--請點擊www.100y.com.tw

Part No.	ProductNo.	Manuf.	Description	Irms負載電流	Vrms負載電壓	SwitchingType	Vin
2708	SSR-VAC-40A	celduc	表面固態繼電器	40A	240VAC		75-280VAC
17716	SC844910	celduc	AC-AC固態繼電器	40A	280Vac	Zero-crossrelay	90-240Vac
24918	KR2040AX	KYOTTO					

表面型DC驅動/AC負載固態繼電器

Surface Mounting Power DC To AC Solid State Relays

詳細產品規格--請點擊www.100y.com.tw


詳細產品規格--請點擊www.100y.com.tw




RELAYS & SOLENIDS




JL-S1C-215MDV



JL-S1C-225WDV




JL-S1C-245




詳細產品規格--請點擊www.100y.com.tw

PartNo.	ProductNo.	Manuf.	Description	Irms負載電流	Vrms負載電壓	SwitchingType	Vin驅動電壓
2618	JL-S1C-215MDV	JEL	DC-AC表面固態繼電器	15A	50~250VAC	Zero-Cross	3~30VDC
2889	JL-S1C-225WDV	JEL	DC-AC表面固態繼電器	25A	50~250VAC	Zero-Cross	3~30VDC
2619	JL-S1C-245	JEL	DC-AC表面固態繼電器	45A	50~250VAC	Zero-Cross	3~30VDC






EQUIVALENT CIRCUIT





- 1.INPUT CIRCUIT
- 2.PHOTO DETECTOR
- 3.ZERO-CROSS CIRCUIT
- 4.OUTPUT CIRCUIT
- 5.PROTECTED CIRCUIT

PartNo.	ProductNo.	Manuf.	Description	Irms負載電流	Vrms負載電壓	SwitchingType	Vin驅動電壓
12912	KD20C10AX	KYOTTO	DC-AC表面固態繼電器	10A	24~280VAC	Zero-Cross	4~32VDC
17010	KD20C15AX	KYOTTO	DC-AC表面固態繼電器	15A	24~280VAC	Zero-Cross	4~32VDC
16174	KD20C25AX	KYOTTO	DC-AC表面固態繼電器	25A	24~280VAC	Zero-Cross	4~32VDC
6338	KD20C40AX	KYOTTO	DC-AC表面固態繼電器	40A	24~280VAC	Zero-Cross	4~32VDC
16082	KD20C75AX	KYOTTO	DC-AC表面固態繼電器	75A	24~280VAC	Zero-Cross	4~32VDC



- 1.INPUT CIRCUIT
- 2.PHOTO DETECTOR
- 3.ZERO-CROSS CIRCUIT
- 4.OUTPUT CIRCUIT
- 5.PROTECTED CIRCUIT


PartNo.	ProductNo.	Manuf.	Description	Irms負載電流	Vrms負載電壓	SwitchingType	Vin驅動電壓
3421	KD40C25AX	KYOTTO	DC-AC表面固態繼電器	25A	48~480VAC	Zero-Cross	4~32VDC
22718	KD40C75AX	KYOTTO	DC/AC 表面固態繼電器	75A	48~480VAC	Zero-Cross	4~32VDC

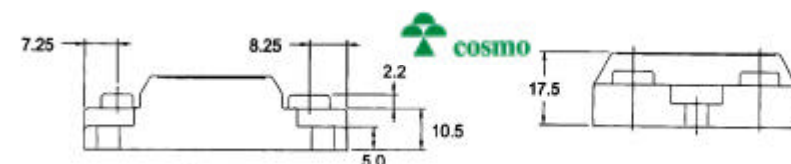

PartNo.	ProductNo.	Manuf.	Description	Irms負載電流	Vrms負載電壓	SwitchingType	Vin驅動電壓
17449	KSD210AC8	COSMO	DC-AC表面固態繼電器	10A	250Vac	Zero crossing circuit	4~32Vdc



- Current Rating to 100Amps
- Multi-Million Cycle Life
- Compatible with Temperature Controllers
- Solid-State, SCR Design
- Zero Voltage Switching
- Control AC Line to 660Vdc
- ac and dc Control Signal Models
- LED Input Status Indicator
- Thermal Conductive Pad Included

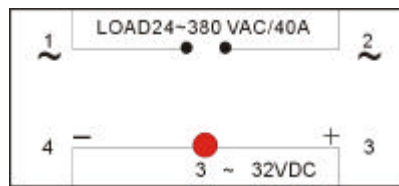

PartNo.	ProductNo.	Description	Irms負載電流	Vrms負載電壓	Vin驅動電壓
18614	SSR-VDC-10A	DC/AC固態繼電器	10A	24~380VAC	4~32Vdc
2707	SSR-VDC-40A	DC-AC表面固態繼電器	40A	24~380VAC	4~32Vdc



勝特力科技有限公司

●服務專線: 886-3-5753170
●24小時傳真: 886-3-5753172
●E-mail: e100y.sale@msa.hinet.net


WWW.100Y.COM.TW

深圳百年電子有限公司

●服務專線: 86-755-83289224
●24小時傳真: 86-755-83640655
●Email: 100y@163.com

29-27


RELAYS & SOLENIDS



PartNo.	ProductNo.	Manuf.	Description	Irms負載電流	Vrms負載電壓	SwitchingType	Vin驅動電壓
17713	SC742110	celduc	DC-AC固態繼電器	25A	280Vac	Zero-cross relay	3~30Vdc
17714	SC744110	celduc	DC-AC固態繼電器	40A	280Vac		3~30Vdc
17715	SC844110	celduc	DC-AC固態繼電器	40A	280Vac		4~30Vdc
17717	SC954160	celduc	固態繼電器	40A	600Vac		5~30Vdc





- All models feature the same compact dimension to provide a uniform mounting pitch.
- Built-in varistor to effectively absorb external surges.
- Operation indicator (red LED) enables monitoring operation.
- Protective cover for greater safety.
- Standard models approved by UL/CSA and UT models by VDE (TUV).



PartNo.	ProductNo.	Manuf.	Description	Irms負載電流	Vrms負載電壓	SwitchingType	Vin驅動電壓
23692	G3NA-220B	OMRON	DC/AC固態繼電器	5~40A	24~240VAC	Zero-Cross	5~24VDC

表面型DC驅動/DC負載固態繼電器 Surface Mounting Power DC to DC Solid State Relays

詳細產品規格--請點擊www.100y.com.tw

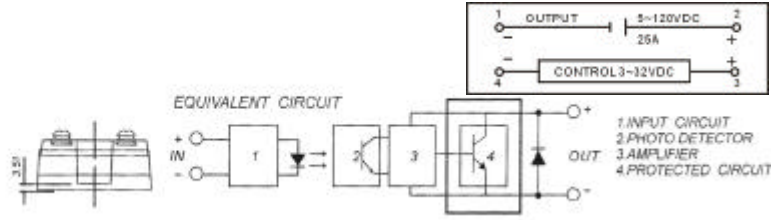



PartNo.	ProductNo.	Manuf.	Description	Irms負載電流	Vrms負載電壓	SwitchingType	Vin驅動電壓
2756	KG1010D	KYOTTO	固態繼電器	10A	5~120VDC	Not Applicable	3~32VDC
14419	KG1025D	KYOTTO	固態繼電器	25A	5~120VDC	Not Applicable	3~32VDC
17383	KG1040D	KYOTTO	DC-DC固態繼電器	40A	5~120VDC	Not Applicable	3~32VDC



PartNo.	ProductNo.	Manuf.	Description	Irms負載電流	Vrms負載電壓	SwitchingType	Vin驅動電壓
18637	ASD630M	ANSO	固態繼電器 SOLID STATE RELAY	30A	3~200VDC	Not Applicable	3~32VDC

表面型三相固態繼電器 3 Phase Solid State Relays

詳細產品規格--請點擊www.100y.com.tw

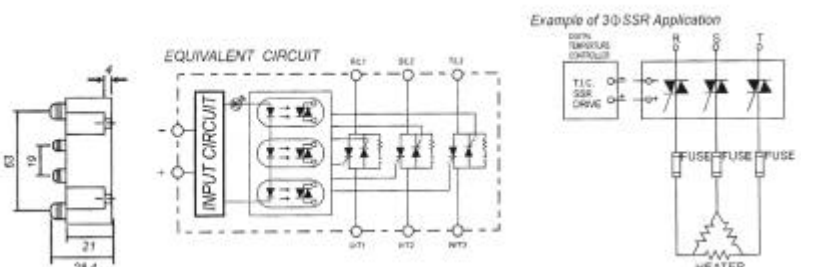

PartNo.	ProductNo.	Manuf.	Description	Irms負載電流	Vrms負載電壓	SwitchingType	Vin驅動電壓
13250	K3PH20C50A	KYOTTO	三相固態繼電器	50A	24~280VAC	Zero-Cross	6~32VDC
14364	K3PH40C50A	KYOTTO	三相固態繼電器	50A	48~480VAC	Zero-Cross	12~32VDC


詳細產品規格--請點擊www.100y.com.tw



RELAYS & SOLENIIDS



KYOTTO

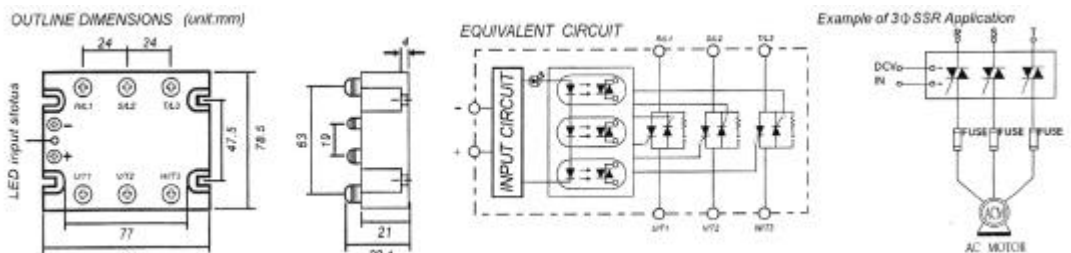

PartNo.	ProductNo.	Manuf.	Description	Irms負載電流	Vrms負載電壓	SwitchingType	Vin驅動電壓
14362	K3PI4025A	KYOTTO	三相固態繼電器	25A	48~480VAC	RANDOM	12~32VDC
14363	K3PI4050A	KYOTTO	三相固態繼電器	50A	48~480VAC	RANDOM	12~32VDC

插入式DC驅動/AC負載固態繼電器 Plug-InInterfaceDCToACSolidState Relays

詳細產品規格--請點擊www.100y.com.tw




馬達控制用
適合於工作機、搬運機、及包裝機等馬達微動作
或可逆運轉用途的SSR。可對微動作及可逆運轉
進行高速應答，也適合高頻率開關。

Plug-inTypePowerRelays

SizesandterminalarrangementsarethesameasOMRONMY-series
PowerRelays.ThesameSocketsarealsoused.

- DC-AC,DC-DC,AC-AC,AC-DCTypes.
- Operatingindicatorprovided.

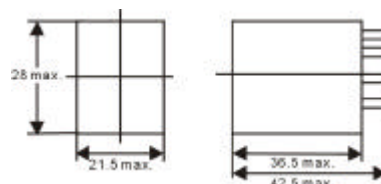


PartNo.	ProductNo.	Manuf.	Description	Irms負載電流	Vrms負載電壓	SwitchingType	Vin驅動電壓
16275	G3F-203SN	OMRON	馬達控制用SSR	交流負載用	有		DC5~24




FEATURE:

- DIP&SIP
 - 入力-出力絕緣耐壓=4,000V
 - 上列JC系列均有UL及CSA規格通過
- 適用：一般電子設備，電訊設備，電腦電源制，影印機，傳直機，
微波爐，電熱器，洗滌機，空調系統，自動販賣機，
電動玩具，安全防盜系統，儀器設備，NC工具機，射出成
型機，機械人，交通號誌等……之控制。




PartNo.	ProductNo.	Manuf.	Description	Irms負載電流	Vrms負載電壓	SwitchingType	Vin驅動電壓
13228	JC26MDC	JEL	DIPAC SSR 繼電器	0.6A	280V	零點導通機能	1.7V

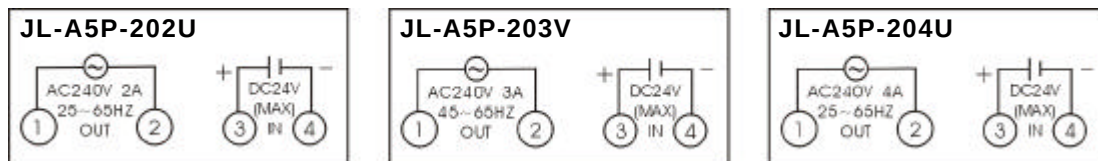

PartNo.	ProductNo.	Manuf.	Description	Irms負載電流	Vrms負載電壓	SwitchingType	Vin驅動電壓
10386	JL-A5P-202U	JEL	交流負荷用S.S.R繼電器	2A	50~250Vac	零點導通機能	3~24Vdc
10388	JL-A5P-203V	JEL	交流負荷用S.S.R繼電器	3A	50~250Vac	零點導通機能	3~24Vdc
5277	JL-A5P-204U	JEL	交流負荷用S.S.R繼電器	4A	50~250Vac	零點導通機能	3~24Vdc



KYOTTO

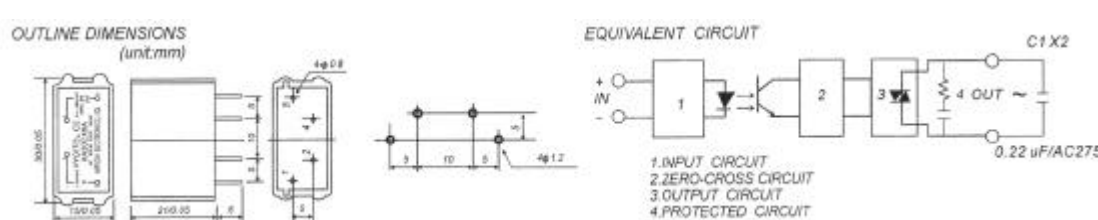

PartNo.	ProductNo.	Manuf.	Description	Irms負載電流	Vrms負載電壓	SwitchingType	Vin驅動電壓
10602	KA20C02A	KYOTTO	交流負荷用S.S.R繼電器	2A	24~280Vac	零點導通機能	3~32Vdc

詳細產品規格--請點擊www.100y.com.tw




RELAYS & SOLENIIDS




KYOTTO

OUTLINE DIMENSIONS (unit:mm)




KB20C02A

24~280VAC/2A 3~32VDC
4 OUT 3 2 IN 1




KB20C03A

24~280VAC/3A 3~32VDC
4 OUT 3 2 IN 1




KB20C04A

24~280VAC/4A 3~32VDC
4 OUT 3 2 IN 1



EQUIVALENT CIRCUIT

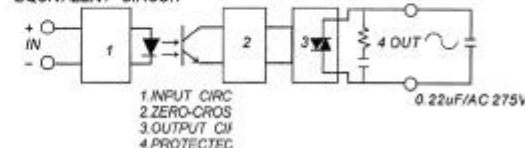

PartNo.	ProductNo.	Manuf.	Description	Irms負載電流	Vrms負載電壓	SwitchingType	Vin驅動電壓
6341	KB20C02A	KYOTTO	交流負荷用 S.S.R繼電器	2 A	24~280Vac	零點導通機能	3~32Vdc
3415	KB20C03A	KYOTTO	交流負荷用 S.S.R繼電器	3 A	24~280Vac	ZERO-CROSS	3~32Vdc
2757	KB20C04A	KYOTTO	交流負荷用 S.S.R繼電器	4 A	24~280Vac	ZERO-CROSS	3~32Vdc




Description

- Relays
- Motor Starters
- Lamps or Indicators
- Solenoids
- Heaters



PartNo.	ProductNo.	Manuf.	Description	Irms負載電流	Vrms負載電壓	SwitchingType	Vin驅動電壓
14267	OAC24-SSR	OPTO22	固態繼電器	45°C以下3A70°C:2A	12-140VAC	ZERO	18-28VDC




Features

- Compact (16-pin dual in-line package type)
- RMSON-state current I_T: 1.2 Arms
- Built-in zero-cross circuit
- Recognised by UL, file NO. E94758
- Approved by CSA, No. LR63705



Applications

- Fan heaters
- Microwave ovens
- Refrigerators
- Air conditioners

SHARP



PartNo.	ProductNo.	Manuf.	Description	Irms負載電流	Vrms負載電壓	SwitchingType	Vin驅動電壓
13226	S201D02	SHARP	SSR For Low Power 繼電器	1.2A	4000Vrms	Zero-cross circuit	1.2V

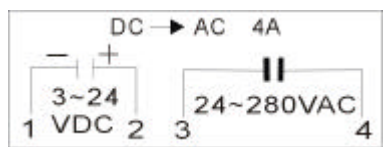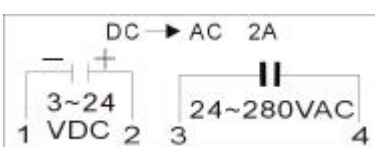

PartNo.	ProductNo.	Description	Irms負載電流	Vrms負載電壓	SwitchingType	Vin驅動電壓
11901	SSR-PCB-DAC-2A	交流負荷用 S.S.R 繼電器	2A	24~280Vac	No ZERO-CROSS	3~24Vdc
11900	SSR-PCB-DAC-4A	交流負荷用 S.S.R 繼電器	4A	24~280Vac	No ZERO-CROSS	3~24Vdc


插入式DC驅動/DC負載固態繼電器 Plug-In Interface DC to DC Solid State Relays

詳細產品規格--請點擊www.100y.com.tw




KYOTTO

OUTLINE DIMENSIONS (unit:mm)




KF0602D

3~60VDC/2A 3~32VDC
4 OUT 3 2 IN 1




KF0604D

3~60VDC/4A 3~32VDC
4 OUT 3 2 IN 1



EQUIVALENT CIRCUIT



PartNo.	ProductNo.	Manuf.	Description	Irms負載電流	Vrms負載電壓	SwitchingType	Vin驅動電壓
6340	KF0602D	KYOTTO	直流負荷用 S.S.R	2A	3~60Vdc	無零點導通機能	3~32Vdc
7756	KF0604D	KYOTTO	直流負荷用 S.S.R	4A	3~60Vdc	無零點導通機能	3~32Vdc

詳細產品規格--請點擊www.100y.com.tw



勝特力科技有限公司

- 服務專線: 886-3-5753170
- 24小時傳真: 886-3-5753172
- E-mail: e100y.sale@msa.hinet.net


WWW.100Y.COM.TW

深圳百年電子有限公司


- 服務專線: 86-755-83289224
- 24小時傳真: 86-755-83640655
- Email: 100y@163.com

29-30


RELAYS & SOLENIIDS




JL-D3P-052




JL-D3P-054



PartNo.	ProductNo.	Manuf.	Description	Irms負載電流	Vrms負載電壓	SwitchingType	Vin驅動電壓
7356	JL-D3P-052	JEL	直流負荷用 S.S.R	2A	3~50Vdc	無零點導通機能	3.5~24Vdc
10383	JL-D3P-054	JEL	直流負荷用 S.S.R	4A	3~50Vdc	無零點導通機能	3.5~24Vdc



- HOMOLOGUEUL
- CARTESSUPPORTSdisponibles(EBS)
- ULAPPROVED
- SOCKETSavailable(EBS)

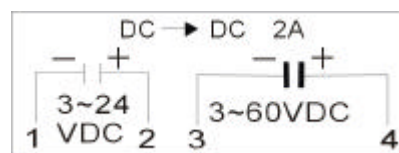

SEC05003
SEC05101



PartNo.	ProductNo.	Manuf.	Description	Irms負載電流	Vrms負載電壓	SwitchingType	Vin驅動電壓
17720	SEC05003	celduc	DC / time delay inputSSR	NPN25mA	5 V		10~32Vdc
17719	SEC05101	celduc	DC quickinput SSR	NPN25mA	5 V		3~10Vdc
11898	SSR-PCB-DDC-2A		直流負荷用 S.S.R	2A	3~60Vdc	No ZERO-CROSS	3~24Vdc

插入式AC驅動/DC負載固態繼電器 Plug-InInterfaceACToDCSolidState Relays



詳細產品規格--請點擊www.100y.com.tw



OUTLINE DIMENSIONS (mm:INCH)



EQUIVALENT CIRCUIT



PartNo.	ProductNo.	Manuf.	Description	Irms負載電流	Vrms負載電壓	SwitchingType	Vin驅動電壓
6339	KN0604D	KYOTTO	直流負荷用 S.S.R	4 A	3~60Vdc	無零點導通機能	80~280Vac

詳細產品規格--請點擊www.100y.com.tw

