



HONDA Connectors

Detailed product specifications are available on: us.100y.com.tw



- Description: connector, Insert 20Pin M str. solder cup
- Item category: connector



Part No.	Product No.	Manufacturer	Description	Type	Pins/Angle	PCB/Solder	Male/Female
14073	MR-20M	HONDA Connectors	HONDA_20P Connector ROHS	MR-()M	20P/180°	Weld	Male
39117	MR-34M	HONDA Connectors	HONDA_34P male weld ROHS	MR-()M	34P/180°	Weld	Male
39118	MR-50M	HONDA Connectors	HONDA_50P male weld ROHS	MR-()M	50P/180°	Weld	Male



20Pin
male
Insert PCB 90°C



Part No.	Product No.	Manufacturer	Description	Type	Pins/Angle	PCB/Solder	Male/Female
14078	MR-20RMA	HONDA Connectors	HONDA_20P PCB Mounting Connector 90° ROHS	MR-()RMA	20P/90°	PCB Mounting	Male




- Description: connector
- Item category: connector



Part No.	Product No.	Manufacturer	Description	Type	Pins/Angle	PCB/Solder	Male/Female
14077	MR-8F	HONDA Connectors	HONDA_8P Connector	MR-()F	8P/180°	Weld	Female

Part No.	Product No.	Manufacturer	Description	Type
42002	HKP-F113	HONDA Connectors	LOOSE PIECE TERMINAL	HKP-F1 ()

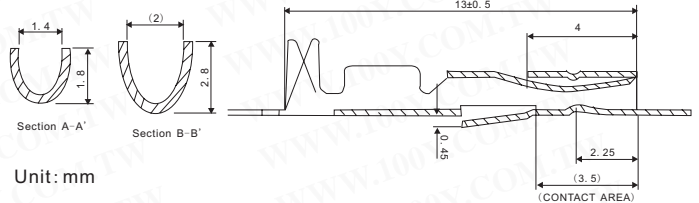

Unit: mm



AMP Connectors + Terminals

Detailed product specifications are available on: us.100y.com.tw



INTRODUCTION

This instruction sheet covers the application and maintenance procedures for AMP pistol grip manual handle assembly 58074-1. The tool is designed to accept interchangeable heads that terminate wires in AMP connectors. Read these instructions carefully before using the tool





Part No.	Product No.	Manufacturer	Description
23854	0-0058074-1	AMP	MTA-100 Connector Tool



- Wire Range: 0.12~0.9mm² (26~18AWG)
- Insulation Range: 1.27~2.92 [.05-.115] max
- Dimensions in brackets are in inches

Unit: mm

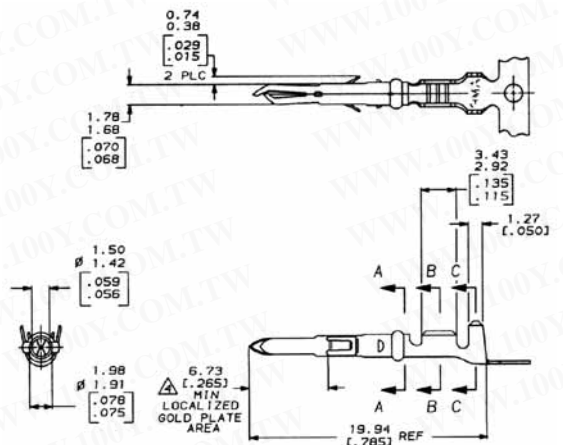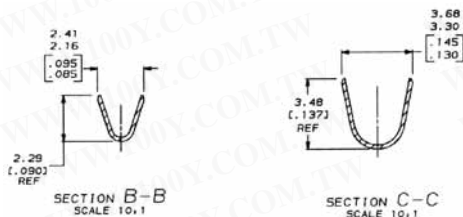

Part No.	Product No.	Manufacturer	Description	Type
15114	0-0350967-1	AMP	1-064508-0	Tin Lead-Plated
28272	0-0350967-1	AMP	1-064508-0 Male Pin	Tin Lead-Plated

