




RJ45 Data Sockets

Detailed product specifications are available on: us.100y.com.tw



SPECIFICATION

- Box: UL94V-0 ABS
- Jock: RJ-45 8P 8C 50 micro inches gold plated (UL-94V-0 PBT)
- Terminal block: UL94V-0 ABS-dual type Nylon-6-66-110type
- PCB-FR-4
- Dual type block can be punched down with krone or AT&T tool
- 110 type block can be punched down with AT&T tool only


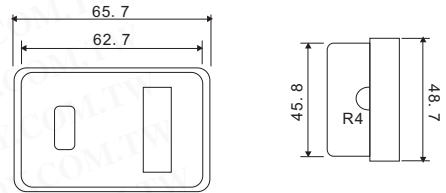


Part No.	Product No.	Manufacturer	Description
2588	21030188A4-01	DINTEK	Cat.5 Surface Mount Outlet




SPECIFICATION

- Box: UL94V-0 ABS
- Jock: RJ-45 8P 8C 50 micro inches gold plated (UL-94V-0 PBT)
- Terminal block: UL94V-0 ABS-dual type Nylon-6-66-110type
- PCB-FR-4
- Dual type block can be punched down with krone or AT&T tool
- 110 type block can be punched down with AT&T tool only

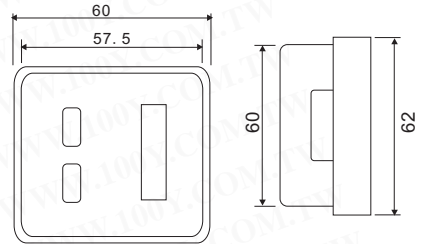

Part No.	Product No.	Manufacturer	Description
2589	21030288A4-01	DINTEK	Cat.5 Surface Mount Outlet

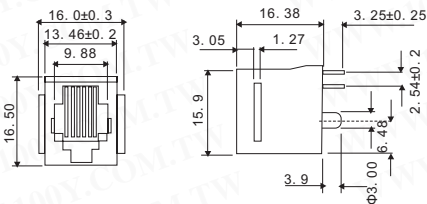

MATERIAL

- Housing-PBT polyester UL94V-0
Mixed glass fiber
Standard color-black
- Contacts-0.45mm Dia round phos-bronze plated with hard gold (6u")

Part No.	Product No.	Manufacturer	Description
20502	258-8P8C-RJ45	UNION	PCB JACK



- Housing: fireproof ABS UL 94V-0
- Jack: 50 micro inches gold plated



Part No.	Product No.	Manufacturer	Description
2582	2603588A9-01	DINTEK	CAT.5 KEYSTON RJ-45 JACK



ELECTRICAL

- Current rating: 1.5Amps
- Insulation resistance: 500Mega-ohms min
- Contact resistance: 20milli-ohms max
- DC resistance: 0.1ohms max
- Data transmission rates up to 100Mbps

MECHANICAL

- Plug insertion life: 750 cycle min
- Plug retention force: 30 lbs min



Part No.	Product No.	Manufacturer	Description
15398	2606266P9-01	DINTEK	6P6C Keystone Jack



MATERIAL

- Case: UL-94V-0 ABS
- Jack: RJ-45 8P8C, 50micro inches gold plated (UL-94V-0 PBT)
- PCB: FR-4

Part No.	Product No.	Description
18141	29165028812-01	RJ45 F-F Connector (Shielded)

