



RF / COAXIAL - CONNECTORS & TOOLS

IDC Crimping Tool

Detailed product specifications are available on: us.100y.com.tw



HT-214	For crimping IDC-Type of connectors on to ribbon cable Crimping from hight 6mm distance to 27.5mm (max. 55mm width)
HT-214D	For crimping DIP plug special attachment With dual slot for the plug Distance "D" in 0.1", 0.3" & 0.6" (max. 58mm width)



Part No.	Product No.	Description
7578	HT-214	IDC Crimping Tool
40875	HT-214D	IDC Crimping Tool
41386	HT-218	IDC Crimping Tool

D-Subminiature Connectors & Tools

D-Subminiature 180°, PC Mount Connectors

Detailed product specifications are available on: us.100y.com.tw




ELECTRICAL

- Operation voltage: 250VAC max
- Current rating: 2.5Amps
- Contact resistance: 20 MΩ max
- Insulator resistance: 3000 MΩ min. at DC 500V
- Dielectric withstanding voltage: AC1000V for 1 minute
- Operation temperature: -55°C to +105°C


MATERIAL

- Insulator: PBT & glass fill reinforced UL94V-0
- Contact: brass (male) ;phosphor bronze (female)
- Shell: steel

Position	A	B	C	D
09	16.92	25.00	30.80	16.30
15	25.50	33.30	39.20	24.60
25	38.96	47.10	53.10	38.30
37	55.42	63.50	69.40	54.80

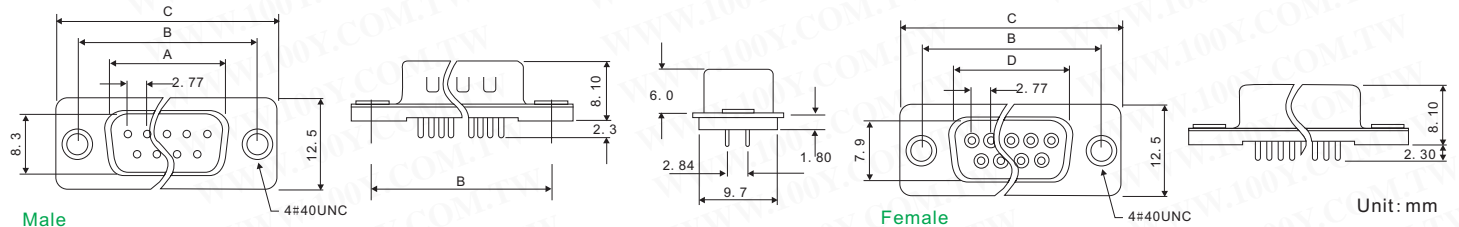

Part No.	Product No.	Description
5785	460-50-02	D-Subminiature 180°, PC Mount connectors (50Pins)
3425	461-09-02	D-Subminiature 180°, PC Mount connectors (9 Pins)
3423	470-09-02	D-Subminiature 180°, PC Mount connectors (9 Pins)
3428	470-25-02	D-Subminiature 180°, PC Mount connectors (25Pins)
13708	E03-15P	D-Subminiature 180°, PC Mount connectors (15Pins)
23716	E04-15P	D-Subminiature 180°, PC Mount connectors (15Pins)
3424	E04-25P	D-Subminiature 180°, PC Mount connectors (25Pins)
28699	E04-37P	37P D-Type Female Socket
13224	E09-15P	D-Subminiature 180°, PC Mount connectors (3 Rows / 15 Pins)

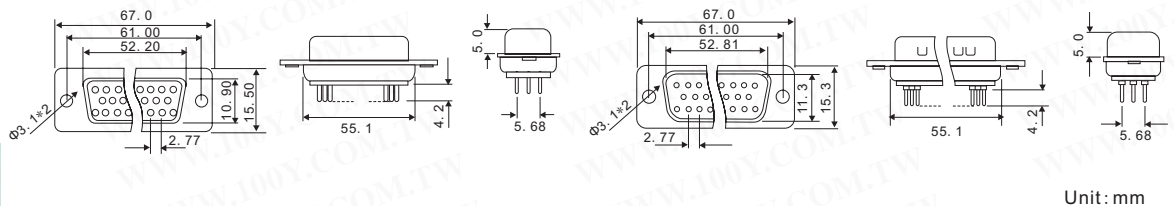

Part No.	Product No.	Description
13221	E03-25P-M	D-Subminiature 180°, PC Mount connectors (25Pins)
13161	E04-25P-M	D-Subminiature 180°, PC Mount connectors (25Pins)

