



RF / COAXIAL - CONNECTORS & TOOLS

5ES+5EH Series, Pluggable Type Terminal Blocks

Detailed product specifications are available on: us.100y.com.tw




MATERIALS

- Housing: polyamide 6. 6, green
- Colmp: phospor bronze, 0. 4t, solder plated
- Wire cage: steel, 0. 7t, Zinc plated
- Screw: M2. 5, steel, Zinc plated

ELECTRICAL

- Insul. Withstands voltage: AC 1500V/min
- Insul. Resistance: 500MΩ or more at DC 500V
- Using temperature range: -40°C~+105°C
- Screw touge value: 5kg-cm

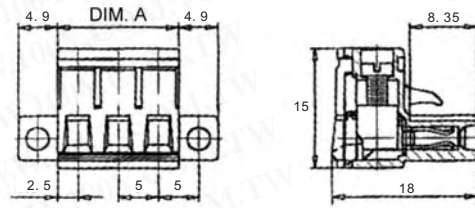

Unit: mm



Part No.	Product No.	Manufacturer	Description	Terminal	Pin Dist.
13633	5ESDVM-04P	DINKLE	5ES- PCB Type Terminal Blocks 250V 15A	4P	5.00mm
13725	5ESDVM-08P	DINKLE	5ES+5EH Series, Pluggable Type Terminal Blocks 250V 15A	8P	5.00mm



ELECTRICAL

- Operating temperature: -30°C to +105°C
- Soldering temperature: 245°C±10°C/5sec

MATERIAL

- Contact pin: brass with tin plated
- Insulator (housing) :thermoplastic (UL94V-0)

Oq027051

OQ027050G


OQ047150G OQ107150G

Part No.	Product No.	Description	Angle	Terminal	Pin Dist.
36378	OQ027050G	OQ Series, Pluggable Type Terminal Blocks	180°	2P	5.00mm
36377	OQ027051	OQ Series, Pluggable Type Terminal Blocks	90°	2P	5.00mm
36379	OQ047150G	OQ Series, Pluggable Type Terminal Blocks	180°	4P	5.00mm
36380	OQ107150G	OQ Series, Pluggable Type Terminal Blocks	180°	10P	5.00mm



5ESDV SERIES

- Housing : polyamide 6. 6, green
- Wire protector: phosphor copper, 0. 4t, solder plated
- Screw: steel, Zinc plated



Unit: mm



Part No.	Product No.	Manufacturer	Description	Terminal	Pin Dist.
2797	5ESDV-02P	DINKLE	5ES+5EH Series, Pluggable Type Terminal Blocks 250V/15A	2P	5.00mm
2798	5ESDV-03P	DINKLE	5ES+5EH Series, Pluggable Type Terminal Blocks	3P	5.00mm
3954	5ESDV-04P	DINKLE	5ES+5EH Series, Pluggable Type Terminal Blocks 250V/15A	4P	5.00mm
3173	5ESDV-05P	DINKLE	5ES+5EH Series, Pluggable Type Terminal Blocks 250V/15A	5P	5.00mm
3174	5ESDV-06P	DINKLE	5ES+5EH Series, Pluggable Type Terminal Blocks250V/15A	6P	5.00mm
4212	5ESDV-07P	DINKLE	5ES+5EH Series, Pluggable Type Terminal Blocks 250V/15A	7P	5.00mm
3955	5ESDV-08P	DINKLE	5ES+5EH Series, Pluggable Type Terminal Blocks 250V/15A	8P	5.00mm
2800	5ESDV-09P	DINKLE	5ES+5EH Series, Pluggable Type Terminal Blocks 250V/15A	9P	5.00mm
4213	5ESDV-10P	DINKLE	5ES+5EH Series, Pluggable Type Terminal Blocks	10P	5.00mm
2801	5ESDV-12P	DINKLE	5ES+5EH Series, Pluggable Type Terminal Blocks 250V/15A	12P	5.00mm
14745	5ESDV-15P	DINKLE	5ES+5EH Series, Pluggable Type Terminal Blocks 250V/15A	15P	5.00mm
28457	5ESDV-16P	DINKLE	5ES+5EH Series, Pluggable Type Terminal Blocks 250V/15A	16P	5.00mm




ELECTRICAL

- Wire range : 2mm2
- Solid wire (AWG) : 12-24
- Stranded wire (AWG) : 12-24
- Torque (kgf. cm) : 4
- Screw : M3
- Wire strip length : 7~8mm
- Withstanding voltage : 4KV
- Operating temperature : -30°C to +105°C

MATERIAL

- Terminal body (metal housing) :brass (CuZn)
- Terminal screw :steel yellow chromated Zinc
- Wire guard : PhBz (CuSn)
- Insulator (housing) :Thermoplastic (UL94V-0)

Part No.	Product No.	Description	Terminal	Pin Dist.
36384	TJ047150	TJ Series, Pluggable Type Terminal Blocks	4P	5.00mm



5ES+5EH Series, Pluggable Type Terminal Blocks250V/15A

Part No.	Product No.	Manufacturer	Description	Angle	Terminal	Pin Dist.
27003	5EHCVC-15P	DINKLE	5ES+5EH Series, Pluggable Type Terminal Blocks250V/15A	180°	15P	5.00mm

