





# Mate-N-Lok Male, Female Connector & Crimp Terminal



Detailed product specifications are available on: [us.100y.com.tw](http://us.100y.com.tw)

Unit: mm



Part No.	Product No.	Description	Pins	Recive Head/YES	Input Head/YES	Packing
14141	T-5011-B3T100	Mate-N-Lok Male Connector Terminal	--	--	--	5,000PCS/R

# 7005, 7006 Series Mate-N-Lok Male, Female Connector & Crimp Terminal




### SPECIFICATIONS

- Current & Rating: 15A AC, DC MAX
- Voltage Rating: 300V AC, DC
- Temperature range: -25°C to +90°C
- Contact Resistance: initial value/10mΩ Max
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1500V AC/Minute

Detailed product specifications are available on: [us.100y.com.tw](http://us.100y.com.tw)


Unit: mm

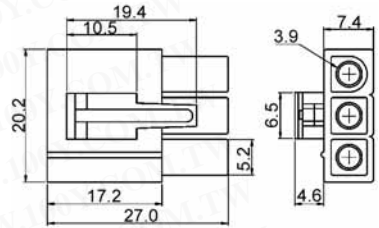

Part No.	Product No.	Description	Pins	Recive Head/YES	Input Head/YES
2358	G05-01P	2.0 φ Mate-N-Lok Male Connector	1P	NO	YES
2315	G05-02P	Pitch:6.2mm	2	NO	YES
2357	G05-03P	Pitch:6.2mm	3P	NO	YES
2316	G05-04P	Pitch:6.2mm	4P	NO	YES
4465	G05-06P	Pitch:6.2mm	6P	NO	YES
39749	P-7006-N2W20400	Pitch:6.2mm	4P	NO	YES




- Terminal:** Material: 0.25T brass  
Plating: copper-undercoated, tin-plated  
Wire range: suitable for AWG#16~26
- Housing:** Material: Nylon 66, UL94V-0, V-2  
Pitch: 6.2 (.244")  
Circuits: 1, 2, 3, 4, 6, 9, 12, 15  
Receptable housing mates with PT 7005  
Plug housing mates with Pt7006

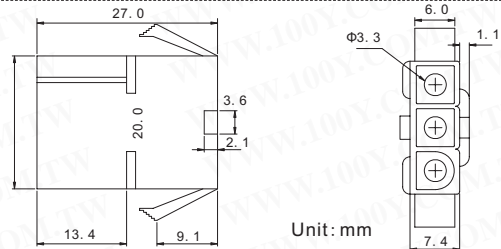

Part No.	Product No.	Description	Pins	Recive Head/YES	Input Head/YES
2318	G06-01P	Pitch:6.2mm	1P	YES	NO
2317	G06-02P	Pitch:6.2mm	2P	YES	NO
2362	G06-03P	Pitch:6.2mm	3P	YES	NO
2319	G06-04P	Pitch:6.2mm	4P	YES	NO
2359	G06-06P	Pitch:6.2mm	6P	YES	NO
39748	P-7005-N2W204B1				



- Terminal:** Material: 0.25T brass  
Plating: copper-undercoated, tin-plated  
Wire range: suitable for AWG#16~26
- Housing:** Material: Nylon 66, UL94V-0, V-2  
Pitch: 6.2 (.244")  
Circuits: 1, 2, 3, 4, 6, 9, 12, 15  
Receptable housing mates with PT 7005  
Plug housing mates with Pt7006

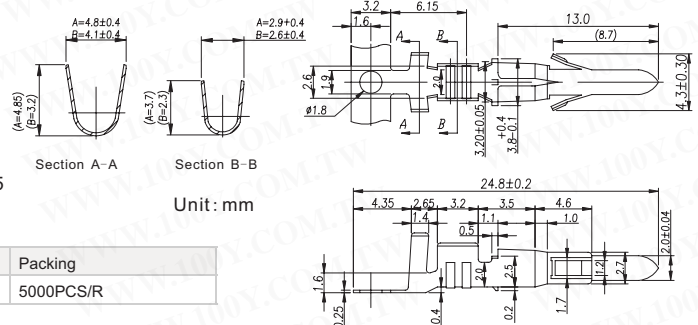

Part No.	Product No.	Description	Packing
12922	T-7005-B3T101	Mate-N-Lok Male Connector Tin Lead-Plated Terminal	5000PCS/R



- Terminal:** Material: 0.25T brass  
Plating: copper-undercoated, tin-plated  
Wire range: suitable for AWG#16~26
- Housing:** Material: Nylon 66, UL94V-0, V-2  
Pitch: 6.2 (.244")  
Circuits: 1, 2, 3, 4, 6, 9, 12, 15  
Receptable housing mates with PT 7005  
Plug housing mates with Pt7006

Part No.	Product No.	Description	Pins	Recive Head/YES	Input Head/YES	Packing
39747	T-7005-B3TT00	Mate-N-Lok Male Connector	--	--	--	3500PCS/R

