



# PCBs & cards

## Pillars

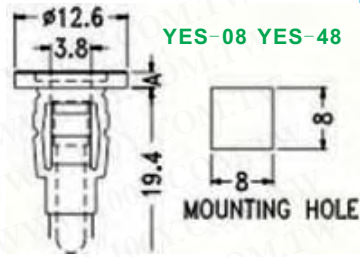

Detailed product specifications are available on: [us.100y.com.tw](http://us.100y.com.tw)

Part No.	A	Package
YES-08	0.8	500
YES-48	4.8	
Part No.	Package	
YES-3	500	



Part No.	Product No.	Description
47509	YES-08	PC SPACER SUPPORT
47515	YES-3	PC SPACER SUPPORT
47514	YES-48	PC SPACER SUPPORT

## Wire-Wrapping Tools

Detailed product specifications are available on: [us.100y.com.tw](http://us.100y.com.tw)



- Tool tip made of tempered steel
- Use with 30AWG wire on 0.025" square posts
- Spring steel cutter
- Size: 4.5" (110mm)

Part No.	Product No.	Description
25890	GCP-030	Wrapping Tool 30# Silver Plated Wire



30 AWG Wrapping Tool

Part No.	Product No.	Description
11572	WP-30	30 AWG Wrapping Tool



WSU-26M



WSU-30M

Part No.	Wire Size		Terminal Hole Diameter		Terminal Hole Depth		Outside Diameter	
	AWG	mm	In.	mm	In.	mm	In.	mm
WSU-26M	26	0.40	0.075	1.90	1.50	38.1	0.213	5.4
WSU-30M	30	0.25	0.036	0.91	1.50	38.1	0.125	3.18

Each WSU tool wraps, unwraps and even strips the appropriate wire diameter with a unique built-in stripper blade. Ideal for bench use or tool kit in all service and repair applications. In addition to versatility, convenience, and reliability, the WSU Series offers exceptional value.

- The WSU-26M is designed to make a modified wrap with 26 AWG (0.40mm) wire on same size posts as WSU-2224 and WSU-24M.
- The WSU-30 and WSU-30M for regular and modified wrapping respectively, are designed or use with 30 AWG (0.25mm) wire on standard .025" (0.63mm) square posts.

Part No.	Product No.	Manufacturer	Description
2698	WSU-26M	OK	22-26AWG Hand Wire Wrap & Wire Unwrap Tool
2697	WSU-30M	OK	30AWG Hand Wire Wrap & Wire Unwrap Tool

## Insulated Wrapping Wire

### 30AWG Insulated Wrapping Wire

Detailed product specifications are available on: [us.100y.com.tw](http://us.100y.com.tw)



30 AWG (0.25MM) INSULATION DIAMETER 0.0195" (0.50MM) UL1423

Roll Size	White	Yellow	Blue	Red	Green	Black
500Ft. (152.0M) ROLL	K30-500-W	K30-500-Y	K30-500-BL	K30-500-R	K30-500-G	K30-500-B
1000Ft. (304.0M) ROLL	K30-1000-W	K30-1000-Y	K30-1000-BL	K30-1000-R	K30-1000-G	K30-1000-B

NOTE: ADDITIONAL COLORS AND LARGER ROLL SIZES MAY BE AVAILABLE, PLEASE CONTACT FACTORY FOR DETAILS

ROLL SIZE AWG	30	28	26	24
UL STYLE UL	1423	1422	1422	1423
OTHER DIAMETER	0.50MM	0.60MM	0.70MM	0.76MM
CONDUCTOR DIAMETER	0.25MM	0.32MM	0.40MM	0.50MM
INSULATION THICKNESS	0.005" NOM	0.0055" NOM	0.0057" NOM	0.0055" NOM
CONDUCTOR-TO-INSULATION	0.5MIN	0.5MIN	1.0MIN	1.0MIN

