



Power Supplies & UPS

45-65W Single Output Switching Power Supply


Detailed product specifications are available on: us.100y.com.tw



- low cost, high reliability.
- compact size, light weight
- 105°C output capacitor.
- 100% full load burn-in test.
- international ac input range.
- built in emi filter, low ripple noise
- high efficiency, low working temperature.
- soft-start circuit, limiting ac surge current.
- short circuit, overload, over voltage protected

- Input voltage range: 85~132VAC/170~264VAC Selected by switch 47~63Hz; 240~370VDC
- AC Current: 1.3A/115V 0.65A/230V
- Inrush current: cold start 18A/115V 36A/230V
- Leakage current: <0.5mA/240VAC
- Temp. coefficient: ±0.03%/°C (0~50°C)
- Withstand voltage: I/P-O/P: 1.5KVAC I/P-FG: 1.5KVAC O/P-FG: 0.5KVAC
- Weight: 0.5Kgs
- Safety standards: Meet UI1012 Requirement (not apply for the mark)

Part No.	Product No.	Manufacturer	Description	Output Volt.	Output Current	Tol.(±)
7523	S-50-12	MEAN WELL	50W Single Output Switching Power Supply	12VDC	4.2A	+/-1%
2192	S-50-15	MEAN WELL	50W Single Output Switching Power Supply	15VDC	3.4A	+/-1%
7521	S-50-24	MEAN WELL	50W Single Output Switching Power Supply	24VDC	2.1A	+/-1%
7522	S-50-5	MEAN WELL	50W Single Output Switching Power Supply	5VDC	10A	+/-2%



- FEATURES**
- Universal AC input/Full range
 - Protections: Short circuit/Overload/Over voltage
 - Fixed switching frequency at 50KHz
 - Cooling by free air convection
 - 100% full load burn-in test
 - 2 year warranty




Part No.	Product No.	Manufacturer	Description	Output Volt.	Output Current	Tol.(±)
10762	S-60-12	MEAN WELL	60W Single Output Switching Power Supply	12VDC	5A	+/-1%
18784	S-60-15	MEAN WELL	60W Single Output Switching Power Supply	15VDC	4A	+/-1%
11854	S-60-24	MEAN WELL	60W Single Output Switching Power Supply	24VDC	2.5A	+/-1%
20930	S-60-5	MEAN WELL	60W Single Output Switching Power Supply	5VDC	12A	+/-1%

75-120W Single Output Switching Power Supply

Detailed product specifications are available on: us.100y.com.tw



- FEATURES**
- Universal AC input / Full range
 - Built-in active PFC function, PF>0.95
 - Protections: Short circuit/Over load/Over voltage
 - Cooling by free air convection
 - 100% full load burn-in test
 - Fix switching frequency at PFC: 67KHz PWM: 134KHz
 - 3 year warranty

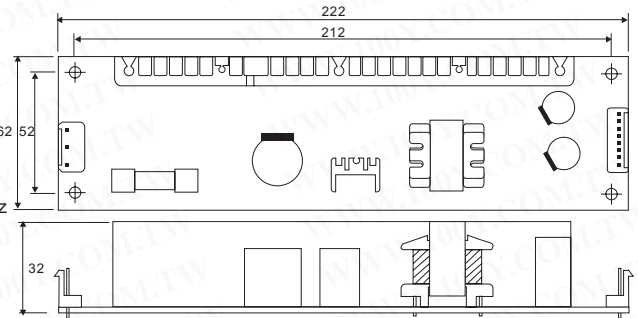

Part No.	Product No.	Manufacturer	Description	Output Volt.	Output Current	Tol.(±)
31371	LPP-100-12	MEAN WELL	MEAN WELL_100W Single Output Switching Power Supply	12V	8.5A	±2%
31372	LPP-100-13.5	MEAN WELL	MEAN WELL_100W Single Output Switching Power Supply	13.5V	7.5A	±2%
31373	LPP-100-15	MEAN WELL	MEAN WELL_100W Single Output Switching Power Supply	15V	6.7A	±2%
31375	LPP-100-24	MEAN WELL	MEAN WELL_100W Single Output Switching Power Supply	24V	4.2A	±1%
31376	LPP-100-27	MEAN WELL	MEAN WELL_100W Single Output Switching Power Supply	27V	3.8A	±1%
31367	LPP-100-3.3	MEAN WELL	MEAN WELL_100W Single Output Switching Power Supply	3.3V	20A	±2%
31377	LPP-100-48	MEAN WELL	MEAN WELL_100W Single Output Switching Power Supply	48V	2.1A	±1%
31368	LPP-100-5	MEAN WELL	MEAN WELL_100W Single Output Switching Power Supply	5V	20A	±2%
31369	LPP-100-7.5	MEAN WELL	MEAN WELL_100W Single Output Switching Power Supply	7.5V	13.5A	±2%

- We provide a wide range of products to development and maintenance engineers in all type of business
- If you cannot find the components you want on the catalogue, please call us.

Taiwan: 886-3-5753170
 Shanghai: 021-54151736 Shenzhen: 0755-83298787

Centenary Materials
 Waiting for your phone call



T E L : Taiwan: 886-3-5753170
 F A X : Taiwan: 886-3-5753172
 E-mail : Taiwan: us_sale@100y.com.tw

Shenzhen: 86-755-83298787
 Shenzhen: 86-755-83640655
 Shenzhen: 100y@163.com

Shanghai: 86-21-54151736
 Shanghai: 86-21-64605107
 Shanghai: 100y-1@163.com