

# Power Supplies & UPS

## DIN 30-960W Single Output Switching Power Supply


Detailed product specifications are available on: [us.100y.com.tw](http://us.100y.com.tw)



- FEATURES:**
- Universal AC input/Full range
  - Protections: Short circuit/Over load/Over voltage
  - Cooling by free air convection
  - Can be installed on DINrail TS-35/7.5 or 15
  - Isolation class I
  - LED indicator for power on
  - 100% full load burn-in test
  - 3 year warranty

DR-60 Series

AC Current (Typ.) : 1.4A/115VAC 0.8A/230VAC  
 Inrush current (Typ.) : Gold start 27A/115VAC 36A/230VAC  
 Working temp. : -20~+60°C (Refer to output load derating curve)  
 Safety standards: UL60950-1, TUV EN60950-1 Approved  
 Design refer to EN50178  
 Withstand voltage: I/P-O/P: 3KVAC

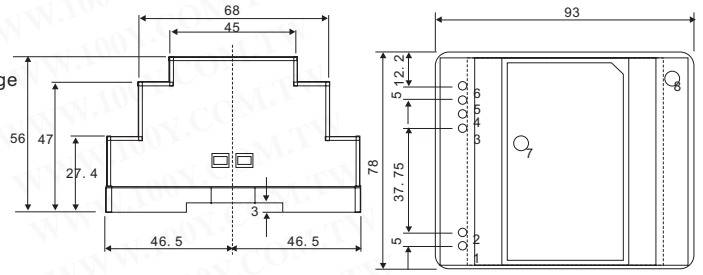

Pin No.	Assignment	Pin No.	Assignment
1	AC/N	5, 6	-V
2	AC/L	7	LED
3, 4	+V	8	+VADJ.



Part No.	Product No.	Manufacturer	Description	Output Volt.	Tol.(±)	Output Current
30808	DR-60-12	MEAN WELL	MEAN WELL_60W Single Output Class II DIN Rail Power	12V	±1%	0~4.5A
30809	DR-60-15	MEAN WELL	MEAN WELL_60W Single Output Class II DIN Rail Power	15V	±1%	0~4.0A
30810	DR-60-24	MEAN WELL	MEAN WELL_60W Single Output Class II DIN Rail Power	24V	±1%	0~2.5A
30805	DR-60-5	MEAN WELL	MEAN WELL_60W Single Output Class II DIN Rail Power	5V	±2%	0~6.5A



- FEATURES:**
- Universal AC input/Full range UI508 listed
  - Protections: Short circuit/Over load/Over voltage/Over temp.
  - Cooling by free air convection
  - Fixed switching frequency at 50KHz
  - Approvals: UL/CUL/TUV/CB/CE
  - LED indicator for power on
  - 100% full load burn-in test
  - 3 year warranty

AC input voltage range: 85~264VAC; 120~370VDC  
 DC adjustment range: 12V: 12~14V, 24V: 24~28V, 48V: 48~53V  
 Over load protection: 105%~150% constant current limiting, auto-recovery  
 Over voltage protection: 121%~142% rated output voltage  
 Withstand voltage: I/P-O/P: 3KVAC, I/P-FG: 1.5KVAC, 1minute  
 Working temperature: -10~60°C (Refer to output derating curve)  
 Safety standards: UL508, TUV EN60950 approved  
 Connection: I/P: 3 poles, O/P: 4 poles screw DIN terminal



Part No.	Product No.	Manufacturer	Description	Output Volt.	Tol.(±)	Output Current
30514	DR-75-12	MEAN WELL	MEAN WELL_75W Single Output DIN Rail Power Supply	12V	±2%	0~6.3A
20043	DR-75-24	MEAN WELL	MEAN WELL_75W Single Output DIN Rail Power Supply	24V	±1%	0~3.2A
30515	DR-75-48	MEAN WELL	MEAN WELL_75W Single Output DIN Rail Power Supply	48V	±1%	0~1.6A



### MEAN WELL\_120W Single Output High Input Voltage



Part No.	Product No.	Manufacturer	Description	Output Volt.	Tol.(±)	Output Current
31113	DRH-120-24	MEAN WELL	MEAN WELL_120W Single Output High Input Voltage	24V	±1%	0~5.0A
31115	DRH-120-48	MEAN WELL	MEAN WELL_120W Single Output High Input Voltage	48V	±1%	0~2.5A

### MEAN WELL\_240W Three Phase DIN Rail Power

Www.100y.com.tw

Part No.	Product No.	Manufacturer	Description	Output Volt.	Tol.(±)	Output Current
31117	DRT-240-24	MEAN WELL	MEAN WELL_240W Three Phase DIN Rail Power	24V	±1%	0~10A
31118	DRT-240-48	MEAN WELL	MEAN WELL_240W Three Phase DIN Rail Power	48V	±1%	0~5.0A

### MEAN WELL\_480W Three Phase DIN Rail Power MEAN WELL\_960W Three Phase DIN Rail Power



Part No.	Product No.	Manufacturer	Description	Output Volt.	Tol.(±)	Output Current
31119	DRT-480-24	MEAN WELL	MEAN WELL_480W Three Phase DIN Rail Power	24V	±1%	0~20A
31121	DRT-480-48	MEAN WELL	MEAN WELL_480W Three Phase DIN Rail Power	48V	±1%	0~10A
31122	DRT-960-24	MEAN WELL	MEAN WELL_960W Three Phase DIN Rail Power	24V	±1%	0~40A
31123	DRT-960-48	MEAN WELL	MEAN WELL_960W Three Phase DIN Rail Power	48V	±1%	0~20A

• We provide a wide range of products to development and maintenance engineers in all type of business



Taiwan: 886-3-5753170

Shanghai: 021-54151736 Shenzhen: 0755-83298787

## Centenary Materials

Waiting for your phone call



T E L : Taiwan: 886-3-5753170  
 F A X : Taiwan: 886-3-5753172  
 E-mail : Taiwan: us\_sale@100y.com.tw

Shenzhen: 86-755-83298787  
 Shenzhen: 86-755-83640655  
 Shenzhen: 100y@163.com

Shanghai: 86-21-54151736  
 Shanghai: 86-21-64605107  
 Shanghai: 100y-1@163.com