


Switches & Control Gear

Illuminated Power Rocker Switch

Detailed product specifications are available on: us.100y.com.tw




TERMINAL	
0 2	.187" SQ
0 5	S0
0 9	PC
1 0	PC ANGLE

Cut-out		
	X	Y
	X	Y
0.75 ~ 1.25	19.2-0.1	13.0+0.1
1.25 ~ 2	19.4-0.1	13.0+0.1
2 ~ 3	19.8-0.1	13.0+0.1

Contact resistance	50m ohm MAX.
Insulated resistance	DC 500V 100M ohm Min.
Dielectric strength	AC 1500V 1 minute

Part No.	Product No.	Description	Pins/Terminal Type	Contact Type	V/VAC	Button/Body Color	Indicators
14149	R13-66B-02	Rocker Switch With Lamp	3P/Quick Connect	SPST ON-OFF	10A125VAC/6A250VAC	Red/Black	125Vac-33k/250Vac-150k
14283	R13-66L-05	Rocker Switch With LED	4P/SO Solder	SPST ON-OFF	10A/125V 6A/250V	Black Button/Black Background	10MA Vf=1.85V

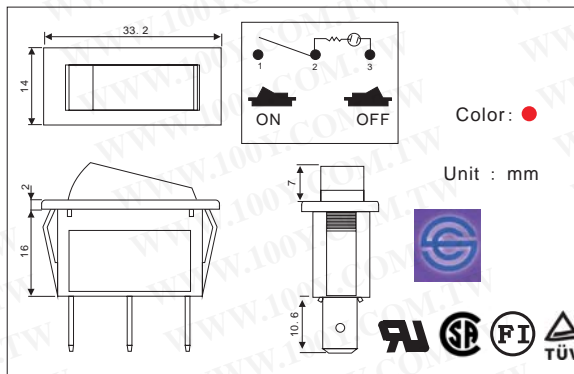


Cut-out		
	X	Y
	X	Y
0.75 ~ 1.25	30.2-0.1	11.2+0.1
1.25 ~ 2	30.4-0.1	11.2+0.1
2 ~ 3	30.8-0.1	11.2+0.1

FEATURES

- MATERIAL: Frames are nylon (UL flame: 94V-2). Terminals are silver plated brass.
- Illuminated actuators are molded in PC, available with red, amber, and green colors.
- Snap-in mounting, easy to install switch into panel.
- The dimension of frame is 33.2*14, for shorter dimension of frame 31.5*14, please refer to page 1-33, item NO. R13-221.

SPEC	16A 125VAC 1/8HP 125VAC 10A 250VAC 1/3HP 250VAC
Contact resistance	50m ohm MAX.
Insulated resistance	DC 500V 100M ohm Min.
Dielectric strength	AC 1500V 1 minute

Part No.	Product No.	Description	Pins/Terminal Type	Contact Type	V/VAC	Button/Body Color	Indicators
14409	R13-70B-B/R	Rocker Switch	3P/6.3*0.8t Quick connect	SPST ON-OFF	16A125V/10A250VAC	Red Button/Black Background	125VAC 330K/250VAC 150K

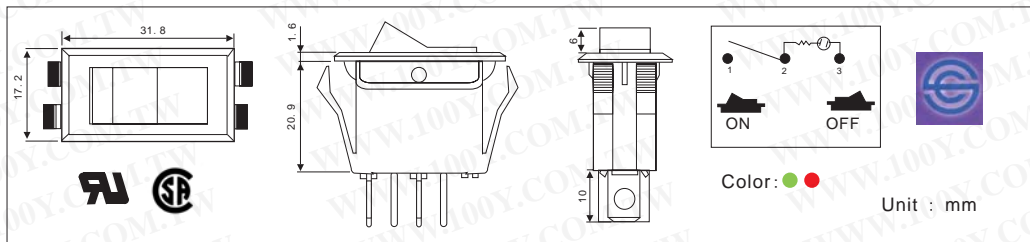

SPEC	16A 125VAC 1/8HP 125VAC 10A 250VAC 1/3HP 250VAC
Contact resistance	50m ohm MAX.
Insulated resistance	DC 500V 100M ohm Min.
Dielectric strength	AC 1500V 1 minute

TERMINAL	
0 1	.250" SQ

Cut-out		
	X	Y
	X	Y
0.75 ~ 1.25	28.6-0.1	14.0+0.1
1.25 ~ 2	28.8-0.1	14.0+0.1
2 ~ 3	29.2-0.1	14.0+0.1

FEATURES

- MATERIAL: Frames are nylon (UL flame: 94V-2). Terminals are silver plated brass.
- Illuminated actuators are molded in PC, available with red, amber, and green colors.
- Snap-in mounting, easy to install switch into panel.

Part No.	Product No.	Description	Pins/Terminal Type	Contact Type	V/VAC	Button/Body Color	Indicators
14134	R13-72B-01	Rocker Switch With Lamp	3P/6.3*0.8t Quick Connect	SPST ON-OFF	15A150V/10A250V	Green Button/Black Background	AC220V(125Vac 33k/250V 150k)
14411	R13-72B-B/R	Rocker Switch	3P/SO6.3/0.8t Quick connect	SPST ON-OFF	15A 125V/10A 250V	Red Button/Black Background	125VAC330K/250VAC150K



FEATURES

- MATERIAL: Frames are nylon (UL flame: 94V-2). Terminals are silver plated brass.
- Illuminated actuators are molded in PC, available with red, amber, and green colors.
- Snap-in mounting, easy to install switch into panel.



Cut-out		
	X	Y
	X	Y
0.75 ~ 1.25	19.2-0.1	13.0+0.1
1.25 ~ 2	19.4-0.1	13.0+0.1
2 ~ 3	19.8-0.1	13.0+0.1



T E L : Taiwan: 886-3-5753170
F A X : Taiwan: 886-3-5753172
E-mail: Taiwan: us_sale@100y.com.tw

Shenzhen: 86-755-83298787
Shenzhen: 86-755-83640655
Shenzhen: 100y@163.com

Shanghai: 86-21-54151736
Shanghai: 86-21-64605107
Shanghai: 100y-1@163.com